


**WARNING**

**PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION**


- To prevent personal injury or product damage only licensed electricians should install.
- To avoid electric shock or component damage disconnect power before attempting installation or servicing.
- This product must be installed in accordance with the national electric code (NEC) and all applicable federal, state and local electric codes and safety standards.
- These Luminaire (fixtures) are designed to meet the latest NEC requirements and are listed in full compliance with UL1598.
- Disconnect product and allow cooling prior to servicing.
- Any alteration or modification of this product is expressly forbidden as it may cause serious personal injury, death, property damage and/or product malfunction.
- To prevent product malfunction and/or electrical shock this product must be properly grounded.
- This product must be installed in accordance with the applicable installation code by a Person familiar with the construction and operation of the product and the hazards involved.
- The device is not intended for use with emergency exit.
- This Fixture is 5%-100% dimmable. Please refer to compatible dimmer list.
- Suitable for damp locations.

**UNPACKING**

Thoroughly inspect the fixture for freight damage. Freight damage should be reported to the carrier.

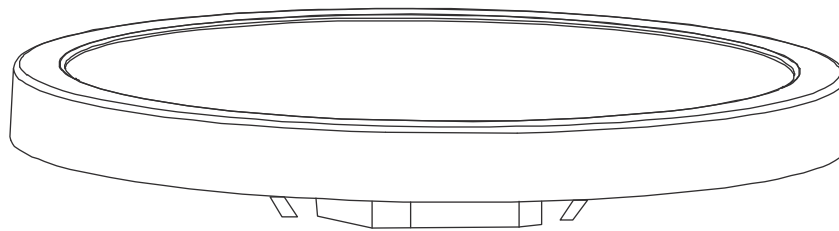

A



B



C



D

**Packaging Contents**

PART	Description	QUANTITY
A	5/7/9 inch Flush Mount Panel	1
B	Mounting Bracket	1
C	Wire Nuts	3
D	Screws	1

**Dimmer Compatibility List**

This unit may operate on other dimmers, have not been tested. Input 120V, 60Hz

<b>LEVITON</b>	6672, 6674, PD-6WCL, DSL06, MACL-153M/MA-R
<b>LUTRON</b>	TG-6000PR-WH, S-600PR-WH, CTCL-153PDH-WH, TGCL-153PH-LA, SLV-600P-AL, DV-600PR-WH, SCL-153ph-WH, GT-600P, DVCL-153P, RNL06, MSCL-OP153M, IP06

## Installation

### Flush Mount

1. Make sure power is OFF and the J-Box is securely mounted before installing the fixture, see Fig1.
2. Refer to the hole position on the bracket and align the holes, Hold the mounting bracket up to the junction box. Screw the mounting bracket to the J-Box, see Fig2.
3. Select the desired lamp color with the CCT switch , see Fig3.
4. Connect supply wire to the wires on the fixture/bracket with wire nuts. Connect white wire to white wire, black wire to black wire and green wire to green wire as grounding connection, see Fig4.
5. Push the fixture to make sure that the springs are squeezed into the bracket and snap into place for a secure fit, see Fig5.

