

Date:	
Project Name:	
SKU #:	

Cylinder Lighting Up & Down Wall Mount Square
 Flush Mounted Wall Fixture



APPLICATIONS

Residential, Commercial, Multi-Family Complex, Hospitality

FEATURES

Construction

- Die-cast Aluminum Housing

Finish

- Black
 - Grey*

Electrical & Technical

- Input Voltage: 100-277VAC
- Input Frequency: 50/60Hz
- Projected Life: L70 > 50,000 hrs
- PF: >0.9
- CRI: >80
- THD: <20%
- CCT: 2700K, 3000K, 3500K, 4000K, 5000K
- Operating Temp.: -4°F ~ 113°F
- IP Rating: IP65

Optical

- Tempered Glass Lens

Installation/Mounting

- Flush Mount:
 - 4" Square J-Box
 - 4" Octagon J-Box

Controls

- 0-10V Dimming

Lumen Output

- 4"/24W: 2,160lm
- 6"/36W: 3,240lm

Warranty

- 5 Year Warranty
 See warranty documentation for more information.




ORDERING INFORMATION **EXAMPLE: CUDWS-0636-40-BK**

CUDWS			
Series	Size/Wattage	CCT	Finish
CUDWS	0424 - 4"/24W 0636 - 6"/36W	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K 50 - 5000K	BK - Black GR - Grey*

Cylinder Lighting Up & Down Wall Mount Square

Flush Mount Wall Fixture

DIMENSIONS

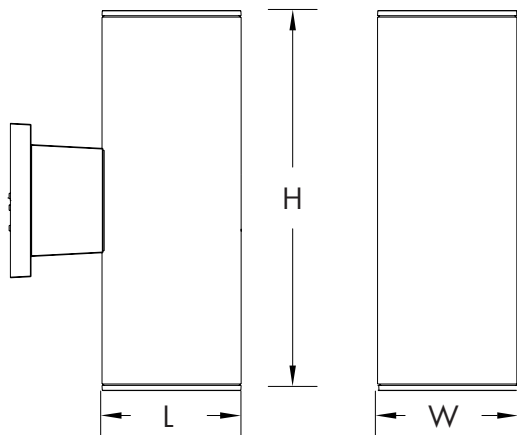

SKU	Length (L)	Width (W)	Height (H)
CUDWS-0424-XX-XX	4.72"	4.72"	11.81"
CUDWS-0636-XX-XX	5.90"	5.90"	17.71"

LUMEN OUTPUT

SKU	Size (in)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
CUDWS-0424-40-XX	4	24	2160	90
CUDWS-0636-40-XX	6	36	3240	90