

Date:	
Project Name:	
SKU #:	

Modern Wall Sconce Round
Wall Mounted



APPLICATIONS

Residential, Multi-Family Complex

FEATURES

Construction

- Die-formed Cold-Rolled Steel with Powder Coated Paint.

Finish

- Brushed Nickel
- Black*

Electrical & Technical

- Input Voltage: 120V
- Input Frequency: 60Hz
- Projected L70 > 50,000 hrs
- PF: >0.9
- CRI: 80
- THD: <20%
- CCT: 2700K, 3000K, 3500K, 4000K, 5000K
- Operating Temp.: -4°F ~ 104°F
- Damp Location Rated

Optical

- Acrylic Diffuser
- 150° Beam Angle

Installation/Mounting

- Wall Mounted

Controls

- Triac Dimming

Compliance

- JA8 TITLE 24 Compliant

Dimmer Compatibility List:

Leviton: 6633-P, 6631-L, 6681, 6613-P, IPI06-1LZ, VPE06, IPE04-1LZ, 6674, 6615-P, 6672

Lutron: S-600, 153P, 6633-P, RRD-10ND, DVCL-153P, AY-600P, CTCL-153P, S-600P, TGCL-153P, S603PG, LGCL-153PL, LG-600P, MA-600, D-600P, D-600PH-DK, MACL-153M, CTELV-303P, DV-600P, DV600P, SELV-300P, VTELV-600M-B, SCL-153P, DVELV-303P, NLV-600, RRD-6NA-WH, MAELV-600-WH, PD-6WCL-WH, DVLV-600P

Legrand: LS603PWV, RHCL453P, RH703P, ADPD703H

Lumen Output

- 14"/16W: 1,000lm

Warranty


- 5 Year Warranty
- See warranty documentation for more information.



ORDERING INFORMATION **EXAMPLE: MWSR-14-16-C-BN**

MWSR				
Series	Size	Wattage	CCT	Finish
MWSR	14 - 14"	16 - 16W	CC - 2700K/3000K/3500K/4000K/5000K	BN - Brushed Nickel BK - Black*

DIMENSIONS

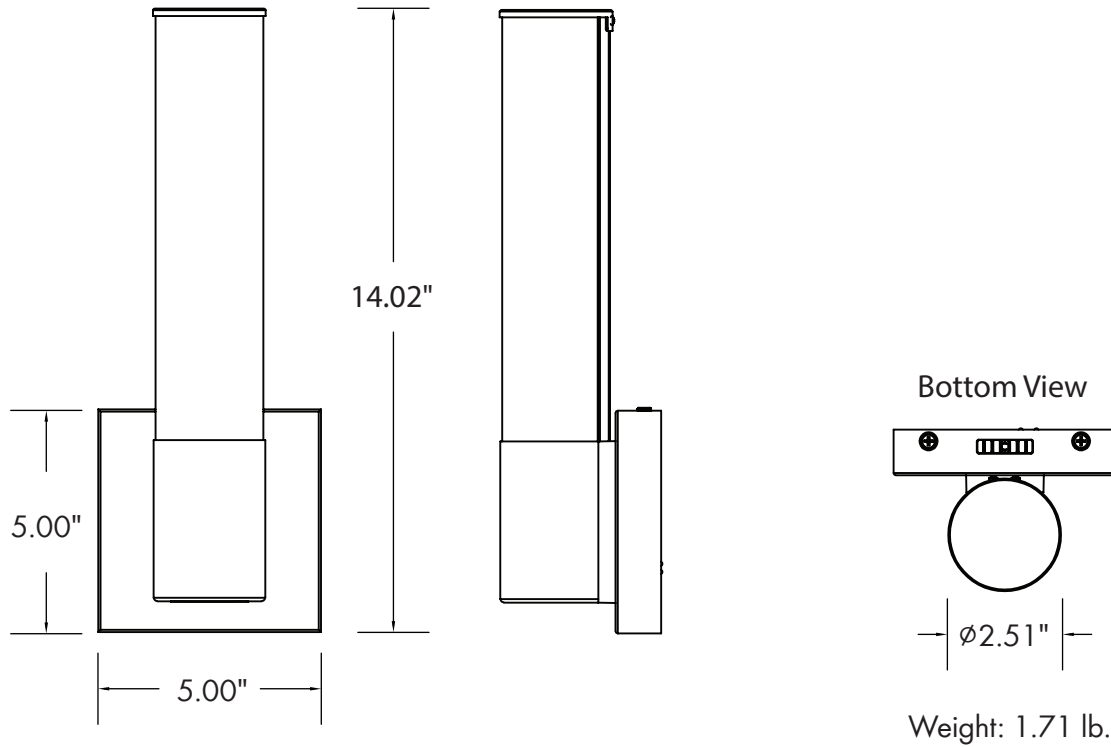

LUMEN OUTPUT

SKU	Size (in)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
MWSR-141-6-C-BN	14	16	1000	62.5