

Date:	
Project Name:	
SKU #:	

**Impakt™ XS**  
Architectural Floodlight



**APPLICATIONS**

Commercial Parking Lots, Pedestrian Pathways, Street Lighting

**FEATURES**

- |   |   |
|---|---|
| <p><b>Construction</b></p> <ul style="list-style-type: none"> <li>- Rugged Die-cast Aluminum Housing</li> <li>- High Impact PC Injection Lens with Rubber Seal Ensuring IP65 Rating.</li> </ul> <p><b>Electrical &amp; Technical</b></p> <ul style="list-style-type: none"> <li>- Input Voltage: 120-277VAC</li> <li>- Input Frequency: 50/60Hz</li> <li>- Projected Life: L70 &gt; 50,000 hrs</li> <li>- PF: &gt;0.9</li> <li>- CRI: 70</li> <li>- THD: &lt;20%</li> <li>- CCT: 3000K, 4000K, 5000K, or 5700K</li> <li>- Operating Temp.: -40°F ~ 104°F</li> <li>- IP Rating: IP65 Enclosure</li> <li>- 10kV Surge Protection [Option]</li> </ul> <p><b>Controls</b></p> <ul style="list-style-type: none"> <li>- 0-10V Dimming [Standard]</li> <li>- Button Photocell [Option]</li> </ul> <p><b>Lumen Output</b></p> <ul style="list-style-type: none"> <li>• 20W: 2700lm</li> <li>• 30W: 4050lm</li> </ul> | <p><b>Finish</b></p> <ul style="list-style-type: none"> <li>- Dark Bronze [Standard]</li> <li>- Matte White*</li> <li>- Matte Black*</li> <li>- Matte Gray*</li> </ul> <p><b>Optical</b></p> <ul style="list-style-type: none"> <li>- Distribution Type:             <ul style="list-style-type: none"> <li>• NEMA5 [H5V5]</li> <li>• NEMA7 [H7V6]</li> </ul> </li> </ul> <p><b>Installation/Mounting</b></p> <ul style="list-style-type: none"> <li>- Knuckle Mount (½ thread)</li> <li>- Trunnion</li> </ul> <p><b>Warranty</b></p> <ul style="list-style-type: none"> <li>- 5 Year Warranty</li> <li>- See warranty documentation for more information.</li> </ul> |
|---|---|




**ORDERING INFORMATION** **EXAMPLE: IPF-XS-20-50-U-D0-D-07-KN**

Series	Size	Wattage	CCT	Input Voltage	Controls Option	Finish	Distribution	Mount
IPF	XS - Extra Small	20 - 20W 30 - 30W	30 - 3000K 40 - 4000K 50 - 5000K 57 - 5700K	U - 120-277VAC	D0 (Without Control Sensors) PH (Button Photocell)	D - Dark Bronze G - Matte Gray* B - Matte Black* W - Matte White*	05 - NEMA5 [H5V5] 07 - NEMA7 [H7V6]	KN - Knuckle Mount TR - Trunnion

- Accessories**
- IPF-XS-TV (Top Visor)
  - IPF-XS-BV (Bottom Visor)
  - IPF-XS-WG (Wire Guard)
  - IPF-SP10 (Surge Protection 10kV/5kA)

DIMENSIONS

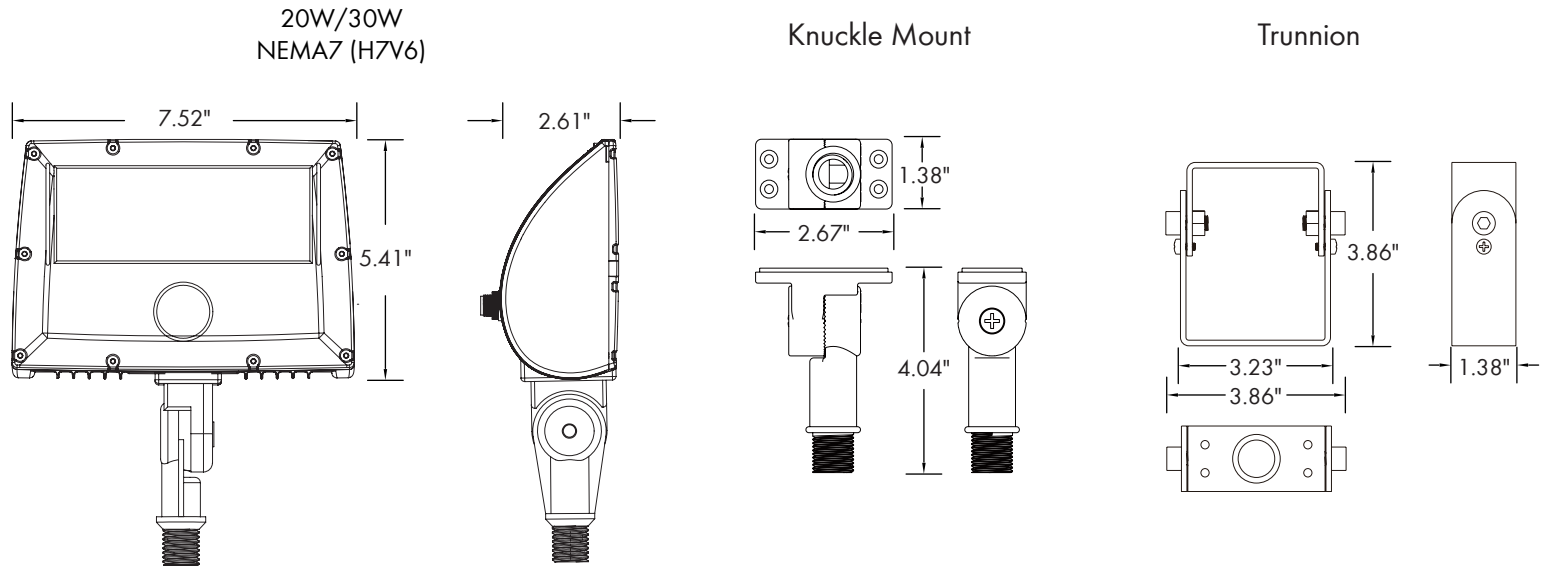

Weight: 5.5 lb.

LUMEN OUTPUT

SKU	Size	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
IPF-XS-20-50-U-D0-D-07-KN	Extra Small	20	2700	135
IPF-XS-30-50-U-D0-D-07-KN	Extra Small	30	4050	135

ELECTRICAL LOAD

Wattage (W)	Current (A)					
	120V	208V	240V	277V	347V	480V
20	0.16	0.09	0.08	0.07	-	-
30	0.25	0.14	0.12	0.10	-	-

ACCESSORIES

