

Date:	
Project Name:	
SKU #:	

Downlight Retrofit Round Fixture

Retrofit Recessed Light



APPLICATIONS

Residential, Commercial, Multi-Family Complex

FEATURES

Construction

- Aluminum Housing

Finish

- White
- Brushed Nickel Trim [Option]
- Black Trim [Option]
- Bronze Trim [Option]

Electrical & Technical

- Input Voltage: 120VAC
- Input Frequency: 60Hz
- Projected Life: L70 > 50,000 hrs
- PF: >0.9
- CRI: >90
- THD: <20%
- CCT Selectable: 2700K/3000K/3500K/4000K/5000K
- Operating Temp.: -4°F ~ 104°F
- Damp Location Rated

Optical

- White PC Lens
- 100° Beam Angle

Installation/Mounting

- Friction Clip Mount: 4" Retrofit Downlight
- Torsion Clip Mount: 6" Retrofit Downlight
- 4" & 6" New Construction Housing
- 4" & 6" Remodel Housing

Controls

- Triac Dimming

Compliance

- JA8 TITLE 24 Compliant

Dimmer Compatibility List:

Leviton: 6672, 6674, DSL06, PD-WCL, MACL-153/MA-R
 Lutron: TG-600PR-WH, S-600PR-WH, CTCL-153PDH-WH, TGCL-153PH-LA, SLV-600P-AL, DV-600PR-WH, SCL-153PH-WH, GT-600P, DVCL-153P, RNL06, MSCL-OP153M, IPL06

Lumen Output

- 4"/10W: 752lm
- 6"/15W: 1,158lm

Warranty

- 5 Year Warranty
 See warranty documentation for more information.



ORDERING INFORMATION EXAMPLE: DR-0410-CC


DR		
Series	Size/Wattage	CCT
DR	0410 - 4"/10W 0615 - 6"/15W	CC - 2700K/3000K/3500K/4000K/5000K

Trim Finish Options

- | | |
|-----------------|---------------------|
| DR-04 (4" Trim) | BK (Black) |
| DR-06 (6" Trim) | BN (Brushed Nickel) |
| | BZ (Bronze) |

[Choose Trim Size and Finish]
 Example: DR-04-BK


DIMENSIONS

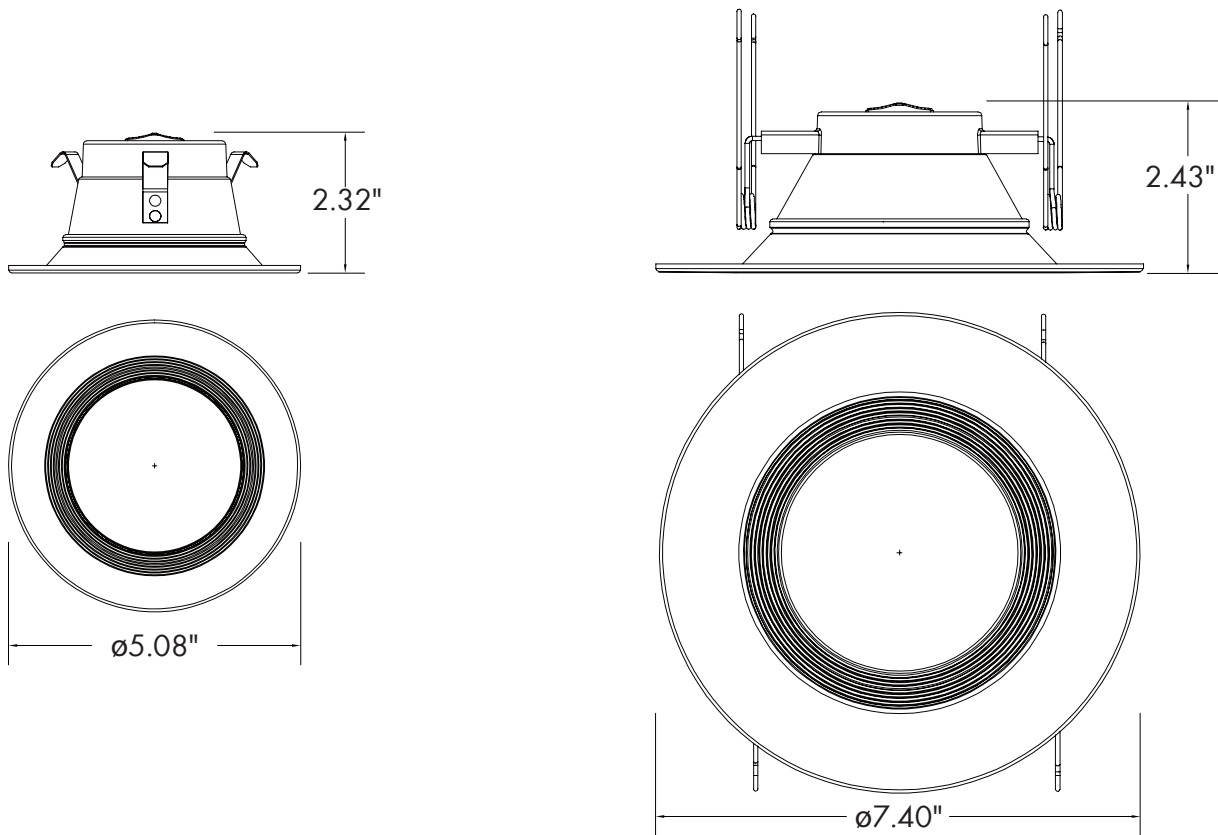

LUMEN OUTPUT


SKU	Size (in)	Wattage (W)	(2700K)		(3000K)		(3500K)		(4000K)		(5000K)	
			Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)
DR-0410-CC	4	10	670	67	707	70	736	73	752	75	744	74
DR-0615-CC	6	15	969	64	1035	69	1110	74	1158	77	1093	72

ACCESSORIES

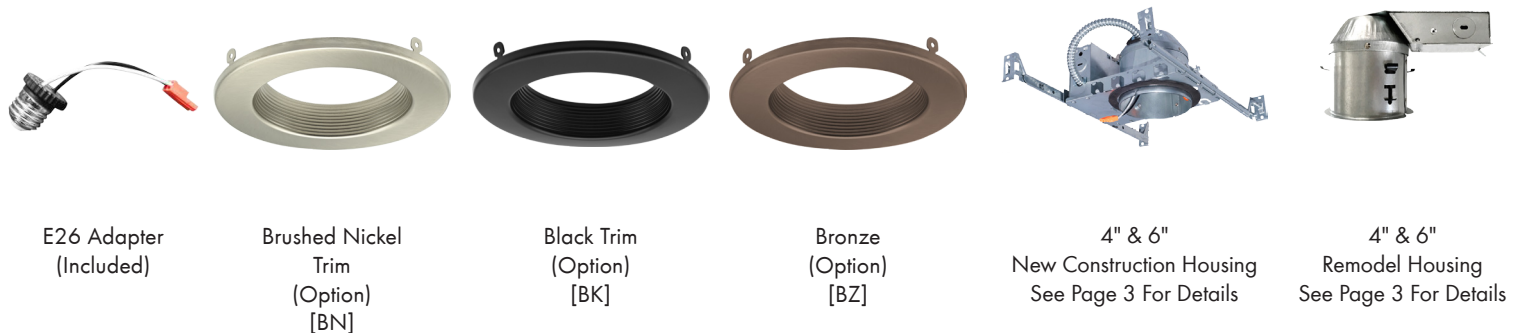


ACCESSORIES


**IC
RATED**

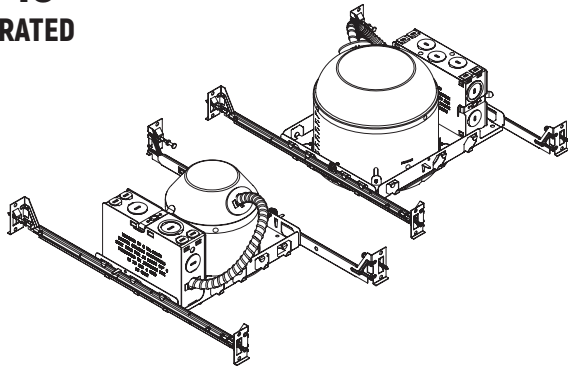

4", 6"
New Construction Housing
(Option)

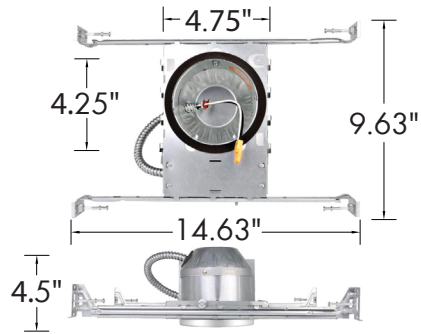


TGS-408-SH

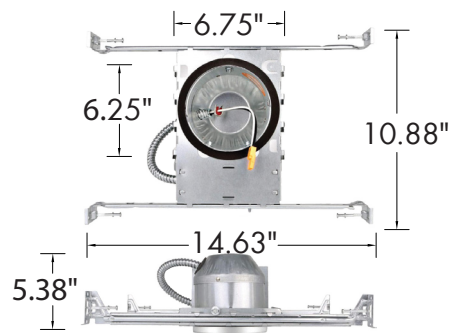


TGS-608-SH


**IC
RATED**

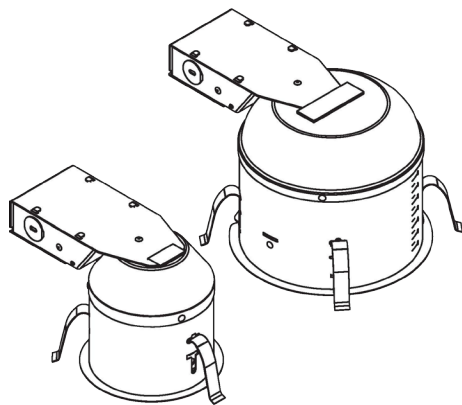

4", 6"
Remodel Housing
(Option)

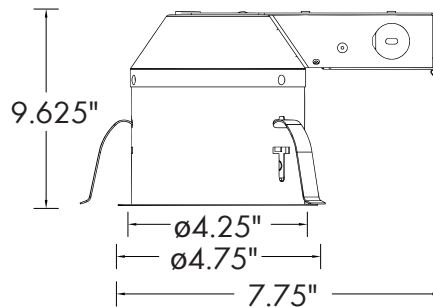

TGS-408-SH-RM

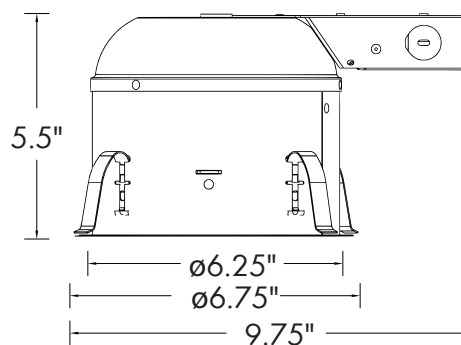

TGS-608-SH-RM