



LED DISK LIGHT

DESCRIPTION: LED Disk 5" / 6" 11.5W
ITEM NUMBER: 1491XX

FEATURES

5 to 6 inch disk light with a big punch for a small light. It provides light comparable to incandescent replacement. Retrofits into most 5" and 6" recessed downlights or surface mounted for new construction applications. Maintenance free, long life and dimmable. Environmentally friendly-contains no mercury or other hazardous materials.

APPLICATIONS

Recessed Lighting
Display Lighting
Flood Lighting



REPLACES



TECHNICAL PARAMETERS

Life Span: 40,000
Fixture Material: Aluminum / PC
IP Rating: N/A
Dimensions: 152.4x30.4mm (6x1.96in)
Dimmable: Yes

OPTICAL PARAMETERS

LED Chip Type: COB
LED Chip Quantity: COB
Lumens: 750
Color Temperature: 5000K (01)
4000K (02)
3000K (03)
CRI: > 80
Beam Angle: 120°
Base: Full Fixture
Cover: Frosted

ELECTRICAL PARAMETERS

Input Voltage: 120V
Total Power Consumption: 11.5W
Power Factor: > .95



Due to advancements in technology, specifications are subject to change without notice.

All images are copyright Truly Green Solutions, Inc. and may be only be used with permission.

WARNING: READ INSTRUCTIONS BEFORE INSTALLING

Disconnect all power sources to the fixtures before installing.




Ordering Information – **DISK LIGHT** 7W 4"

149001 LED Down-Disk Lights - 4 inch Retrofit Luminaires- 7W (5000K)

149002 LED Down-Disk Lights - 4 inch Retrofit Luminaires- 7W (4000K)

149003 LED Down-Disk Lights - 4 inch Retrofit Luminaires- 7W (3000K)

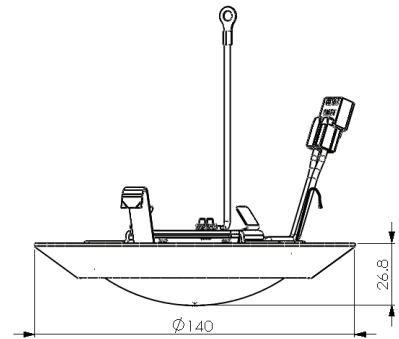


Ordering Information – **DISK LIGHT** 11.5W 5 5/8"

149101 LED Down-Disk Lights - 5/8 inch Retrofit Luminaires- 11.5W (5000K)

149102 LED Down-Disk Lights - 5/8 inch Retrofit Luminaires- 11.5W (4000K)

149103 LED Down-Disk Lights - 5/8 inch Retrofit Luminaires- 11.5W (3000K)

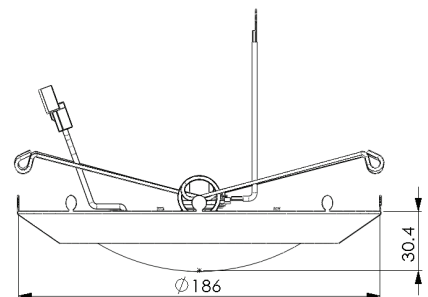

Due to advancements in technology, specifications are subject to change without notice.

All images are copyright Truly Green Solutions, Inc. and may be only be used with permission.

WARNING: READ INSTRUCTIONS BEFORE INSTALLING

Disconnect all power sources to the fixtures before installing.