


Date:	
Project Name:	
SKU #:	

Universal Light™ G5
HID Replacement

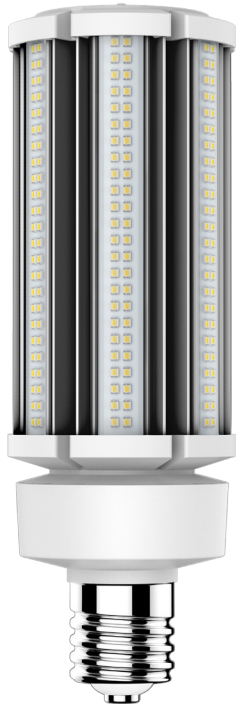

APPLICATIONS

Commercial, Industrial, Street Lights, Post Tops

FEATURES

Construction

- Aluminum Alloy and PC Base Housing
- Passive Cooling

Finish

- White

Electrical & Technical

- Input Voltage: 100-277V
- Input Frequency: 50/60Hz
- Projected Life: L70 > 57,000 hrs
- PF: >0.9
- CRI: >80
- THD: <20%
- Proprietary CCT: Wildlife Friendly*
HPS Match™*
City Spec™*
- Operating Temp.: -40°F ~ 140°F
- IP Rating: IP64

Optical

- 360° Beam Angle

Installation/Mounting

- Mogul Base (E39) Socket
- Medium Base (E26) Socket
- [Note: Ballast must be bypassed]

Controls

- 1-10V Dimming

Lumen Output

- 36W: 5,040lm
- 45W: 6,300lm
- 54W: 7,560lm
- 63W: 8,820lm

Warranty

- 5 Year Warranty
- See warranty documentation for more information.



ORDERING INFORMATION **EXAMPLE: 318036-C-G5-E39**


Series	Lens Cover	Wattage	CCT	Series Type	Base Type Option
318	0 - Clear	36 - 36W 45 - 45W 54 - 54W 63 - 63W	19 - Wildlife Friendly* 22 - HPS Match™* 26 - City Spec™*	G5	E26 - Medium Base E39 - Mogul Base

Note: Proprietary CCT does not come with selector switch,

Accessories


SPD-10kV (10kV Surge Protection)

DIMENSIONS

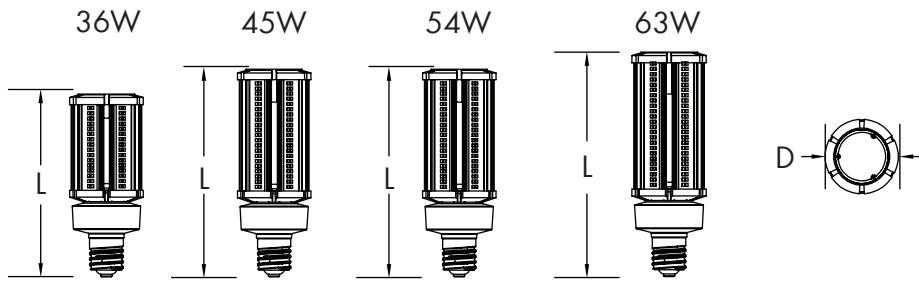

Wattage	Diameter (D)	Length [E26]	Length [E39]	Weight (lb.)
36W	ø3.35"	7.95"	8.62"	1.41
45W	ø3.35"	9.13"	9.80"	1.61
54W	ø3.35"	9.13"	9.80"	1.65
63W	ø3.35"	9.72"	10.39"	1.81

Wattage	Replacement (MH, HID)
36W	175W
45W	200W
54W	250W
63W	320W

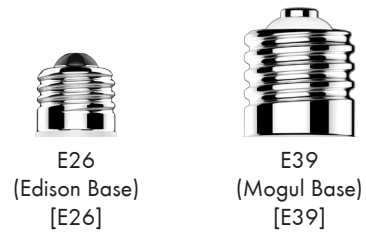

LUMEN OUTPUT

SKU	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
3418036-C-G5-E39	36	5040	140
3418045-C-G5-E39	45	6300	140
3418054-C-G5-E39	54	7560	140
3418063-C-G5-E39	63	8820	140

ACCESSORIES



10kV Surge Protection Device [SPD-10kV]