

Date:	
Project Name:	
SKU #:	

**ORBIT™ S ACOUSTIC**  
Suspended/Surface Architectural Square



Suspended Mount



Surface Mount

**APPLICATIONS**

Commercial, Retail, Office, Public Spaces

**FEATURES**

**Construction**

- Aluminum Body Housing
- Powder Coated Finish

**Electrical & Technical**

- Input Voltage: 120-277V
- Input Frequency: 50/60Hz
- Projected Life: L70 > 50,000 hrs
- PF: >0.9
- CRI: >90
- THD: <20%
- CCT: 3000K, 3500K, 4000K, 5000K
- Operating Temp.: -4°F ~ 104°F
- Damp Location Rated

**Controls**

- 0-10V Dimming

**Lumen Output**

- 15W: 1,050lm
- 25W: 1,750lm
- 36W: 2,520lm
- 50W: 3,500lm

**Acoustic Panel**

- Not for sound deadening
- Decorative Look
- Multiple Colors Available [See Page 3 For Details]

**Optical**

- 160° Beam Angle

**Installation/Mounting**

- Suspended Mount
  - Available Lengths: 10' [Standard]
- Surface Mount

**Warranty**


- 5 Year Warranty
- See warranty documentation for more information.

**FINISHES**

**Standard**



**Custom\***




NOTE: Any Custom Color Available\*



**ORDERING INFORMATION** **EXAMPLE: ORB-S-14-15-40-U-D1-BK-CM10-AC-1141**


Series	Size	Wattage	CCT	Input Voltage	Control	Finish	Mounting Option	Acoustic Color Option
ORB-S	14 - 14"	15 - 15W	30 - 3000K	U - 120-277V	D1 - 0-10V Dimming	<b>STANDARD</b> BK - Black WH - White <b>CUSTOM*</b> CC - Custom RAL	CM10 - Suspended Mount SM - Surface Mount	See Page 3
	18 - 18"	25 - 25W	35 - 3500K					
	24 - 24"	36 - 36W	40 - 4000K					
	32 - 32"	50 - 50W	50 - 5000K					

**DIMENSIONS**

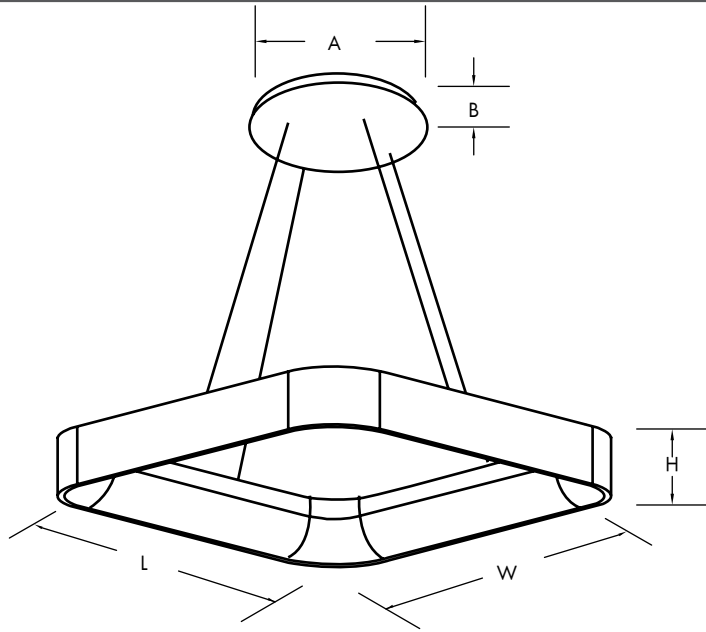

**Suspended Mount**

Wattage	Fixture			Canopy	
	Length (L)	Width (W)	Height (H)	Diameter (A)	Height (B)
15W	14.2"	14.2"	3.5"	∅10.0"	2.0"
25W	17.7"	17.7"	3.5"	∅10.0"	2.0"
36W	23.6"	23.6"	3.5"	∅10.0"	2.0"
50W	31.5"	31.5"	3.5"	∅10.0"	2.0"

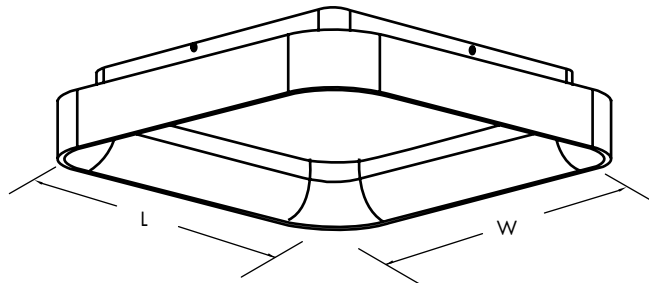


**Surface Mount**

Wattage	Fixture		
	Length (L)	Width (W)	Height (H)
15W	14.2"	14.2"	4.6"
25W	17.7"	17.7"	4.6"
36W	23.6"	23.6"	4.6"
50W	31.5"	31.5"	4.6"


**LUMEN OUTPUT**

SKU	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
ORB-S-14-15-40-U-D1-BK-CM10	15	1050	70
ORB-S-18-25-40-U-D1-BK-CM10	25	1750	70
ORB-S-24-36-40-U-D1-BK-CM10	36	2520	70
ORB-S-32-50-40-U-D1-BK-CM10	50	3500	70

ACOUSTIC COLOR



AC-1141



AC-2122




AC-3120



AC-4123



AC-5107



AC-6106



AC-7145




AC-8129



AC-9140



AC-19126




AC-11135



AC-12133




AC-13111



AC-14144



AC-21130




AC-16104



AC-17147



AC-18125




AC-22119




AC-20128



AC-25138



AC-31108



AC-24117




AC-42146




AC-43115



AC-28110



AC-33103



AC-34102



AC-35101



AC-36105



AC-38127



AC-39143



AC-40124