

Date:	
Project Name:	
SKU #:	

Contemporary Vanity
Flush Wall Mounted



MOUNTING OPTIONS



Flush Mount
(Standard)

APPLICATIONS

Residential, Commercial, Multi-Family Complex

FEATURES

Construction

- Die-formed Cold-rolled Steel
- Powder Coated Paint

Finish

- Brushed Nickel
- Black*
- White*

Electrical & Technical

- Input Voltage: 120V
- Input Frequency: 60Hz
- Projected L70 > 50,000 hrs
- PF: >0.9
- CRI: >80 or >90 [Option]
- THD: <20%
- CCT Selectable: 2700K/ 3000K/
3500K/4000K/5000K
- Operating Temp.: 4 °F~104 °F
- Damp Location Rated

Optical

- High Transmission
- White Acrylic Lens
- 270° Beam Angle

Installation/Mounting

- Flush Wall Mounted

Controls

- Triac Dimming

Dimmer Compatibility List:

Leviton: IPL06-10Z, 6672-11W, 6674-P0W, DLS06-1LZ
Lutron: TGCL-153P, MACL-153M, CTCL-153P, PD-6WCL

Lumen Output

- 2'/25W: 2,000lm
- 3'/30W: 2,400lm
- 4'/35W: 2,800lm

Warranty


- 5 Year Warranty
See warranty documentation for more information.



ORDERING INFORMATION **EXAMPLE: VF-2425-CC-BN**

VF			
Series	Size/Wattage	CCT	Finish
VF	2425 - 24"/25W 3630 - 36"/30W 4835 - 48"/35W	CC - 2700K/3000K/3500K/4000K/5000K	BN - Brushed Nickel BK - Black* WH - White*

DIMENSIONS

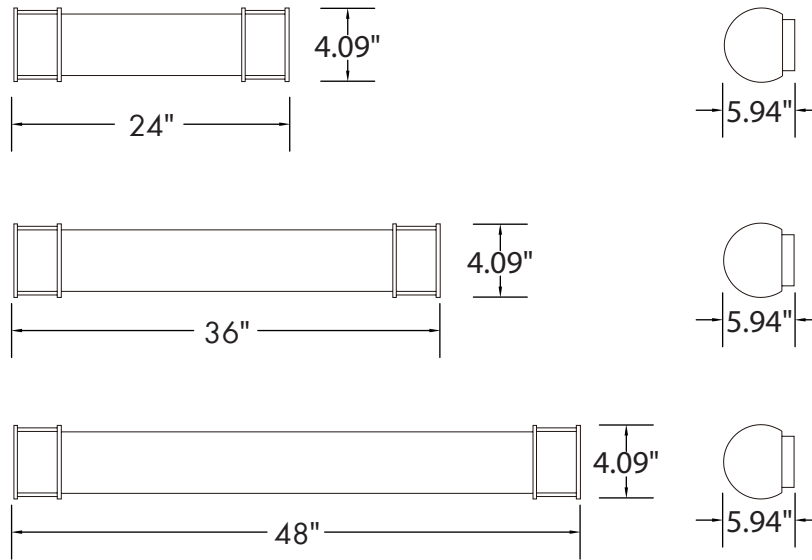

LUMEN OUTPUT

SKU	Size (in)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
VF-2425-CC-BN	24	25	2000	80
VF-3630-CC-BN	36	30	2400	80
VF-4835-CC-BN	48	35	2800	80