

Date:	
Project Name:	
SKU #:	

AQUA™ R
Round Cylinder Fixture



APPLICATIONS

Residential, Commercial, Multi-Family, Hospitality

FEATURES

Construction

- Die-cast Aluminum Base
- Spun Aluminum Body

Optical

- Beam Angles:
 - 20°
 - 40°
 - 60°

Electrical & Technical

- Input Voltage: 100-277V
- Input Frequency: 50/60Hz
- Projected Life: L70 > 50,000 hrs
- PF: >0.9
- CRI: >90
- THD: <20%
- CCT: 2700K, 3000K, 3500K, 4000K
- Operating Temp.: -40°F ~ 122°F
- IP Rating: IP65

Installation/Mounting

- Pendant Mount:
 - Cable Adjustable to 3.3ft
 - 3.3' Stem [Standard] [Custom Length*]
- Surface Mount

Controls

- Triac Dimming [Option]
- 0-10 Dimming [Option]

Warranty

- 5 Year Warranty
- See warranty documentation for more information.

Lumen Output


- $\phi 3" \times 6" / \phi 3.75" \times 6" / 15W$: 1,200lm
- $\phi 3.75" \times 6" / 20W$: 1,600lm
- $\phi 4.5" \times 6" / 30W$: 2,400lm
- $\phi 5.5" \times 6.37" / 40W$: 3,200lm
- $\phi 5.5" \times 6.37" / 50W$: 4,000lm
- $\phi 6.62" \times 7.12" / 60W$: 4,400lm
- $\phi 8.12" \times 8.37" / 90W$: 6,500lm

HOUSING FINISHES



Black White

REFLECTOR FINISHES

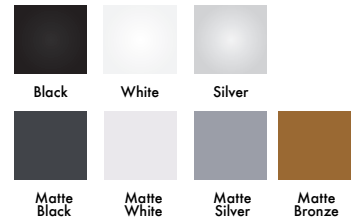

Black White Silver
Matte Black Matte White Matte Silver Matte Bronze




ORDERING INFORMATION **EXAMPLE: AQR-0306-15-30-20-D-BK-WH-CM**


Series	Size	Wattage	CCT	Beam Angle	Dimming	Finish	Reflector	Mounting Option
AQR	0306 - D: 3" x H: 6"	15 - 15W 20 - 20W	27 - 2700K 30 - 3000K	20 - 20° 40 - 40°	D - Triac Dimming D1 - 0-10V Dimming	BK - Black WH - White	BK - Black WH - White SV - Silver MB - Matte Black MW - Matte White MS - Matte Silver MB - Matte Bronze	CM - Cable Mount [3.3'] ST - Stem Mount [3.3'] SM - Surface Mount
	0406 - D: 4" x H: 6"	30 - 30W	35 - 3500K	60 - 60°				
	0506 - D: 5" x H: 6"	40 - 40W 50 - 50W	40 - 4000K					
	0607 - D: 6" x H: 7"	60 - 60W						
	0808 - D: 8" x H: 8"	90 - 90W						

DIMENSIONS

Pendant Mount

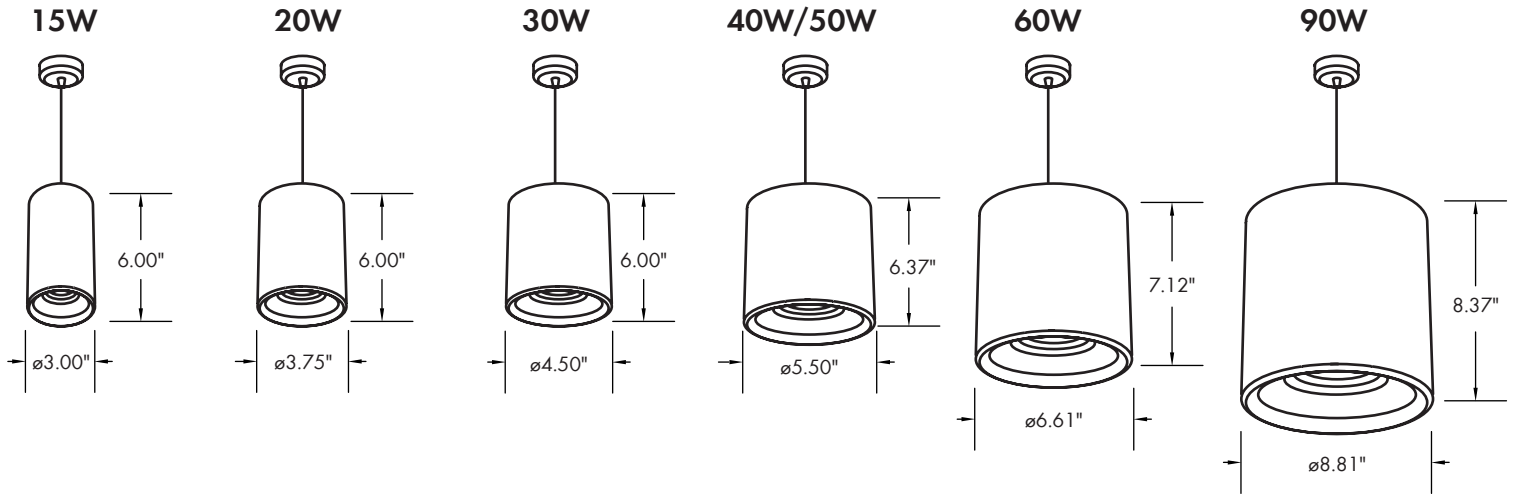

Surface Mount

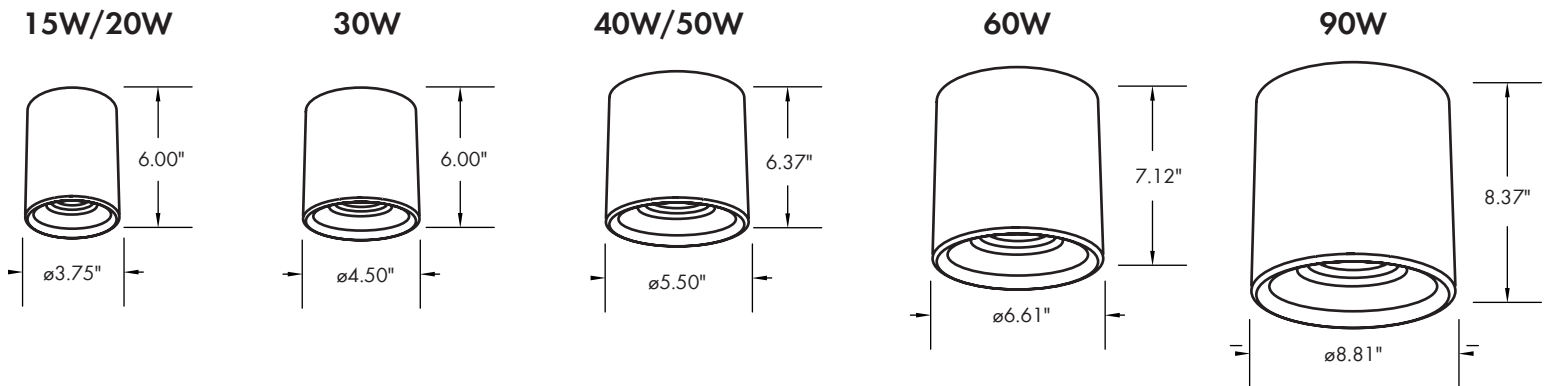

LUMEN OUTPUT

SKU	Size [DxH] (in)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
AQR-0306-15-30-20-D-BK-WH-XX	ø3 x 6/ ø3.75 x 6	15	1200	80
AQR-0306-20-30-20-D-BK-WH-XX	ø3.75 x 6	20	1400	70
AQR-0406-30-30-20-D-BK-WH-XX	ø4.5 x 6	30	2400	80
AQR-0506-40-30-20-D-BK-WH-XX	ø5.5 x 6.37	40	3200	80
AQR-0506-50-30-20-D-BK-WH-XX	ø5.5 x 6.37	50	4000	80
AQR-0607-60-30-20-D-BK-WH-XX	ø6.61 x 7.12	60	4400	73
AQR-0805-90-30-20-D-BK-WH-XX	ø8.12 x 8.37	90	6500	72