

Date:	
Project Name:	
SKU #:	

**HELIX™ R**  
Flush Mounted Round Fixture



**APPLICATIONS**

Residential, Commercial, Multi-Family, Hospitality

**FEATURES**

**Construction**

- Die-cast Aluminum Base
- Spun Aluminum Body

**Optical**

- Beam Angles:
  - 15°
  - 30°
  - 45°

**Electrical & Technical**

- Input Voltage: 100-277V
- Input Frequency: 50/60Hz
- Projected Life: L70 > 50,000 hrs
- PF: >0.9
- CRI: >90
- THD: <20%
- CCT: 2700K, 3000K, 3500K, 4000K
- Operating Temp.: -40°F ~ 122°F
- Dry Location

**Installation/Mounting**

- Pendant Mount:
  - Cable Adjustable to 3.3ft
  - 3.3' Stem [Standard] [Custom Length\*]
- Surface Mount

**Controls**

- Triac Dimming [Option]
- 0-10 Dimming [Option]


**Warranty**

- 5 Year Warranty
- See warranty documentation for more information.


**Lumen Output**

- 15W: 1,200lm
- 20W: 1,600lm
- 30W: 2,400lm
- 40W: 3,200lm

**HOUSING FINISHES**



**REFLECTOR FINISHES**

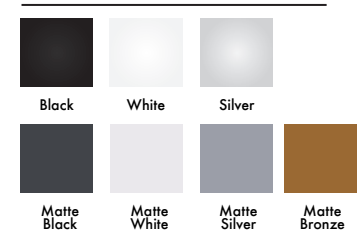


**ORDERING INFORMATION** **EXAMPLE: HXR-0305-15-30-15-D-BK-WH-CM**


Series	Size	Wattage	CCT	Beam Angle	Dimming	Finish	Reflector	Mounting Option
HXR	0305 - D: 3"x H: 5"	15 - 15W	27 - 2700K	15 - 15°	D - Triac Dimming D1 - 0-10V Dimming	BK - Black WH - White	BK - Black WH - White SV - Silver MB - Matte Black MW - Matte White MS - Matte Silver MB - Matte Bronze	CM - Cable Mount [3.3'] ST - Stem Mount [3.3'] SM - Surface Mount
	0305 - D: 3"x H: 5"	20 - 20W	30 - 3000K	30 - 30°				
	0405 - D: 4"x H: 5"	30 - 30W	35 - 3500K	45 - 45°				
	0506 - D: 5"x H: 6"	40 - 40W	40 - 4000K					

DIMENSIONS

Pendant Mount

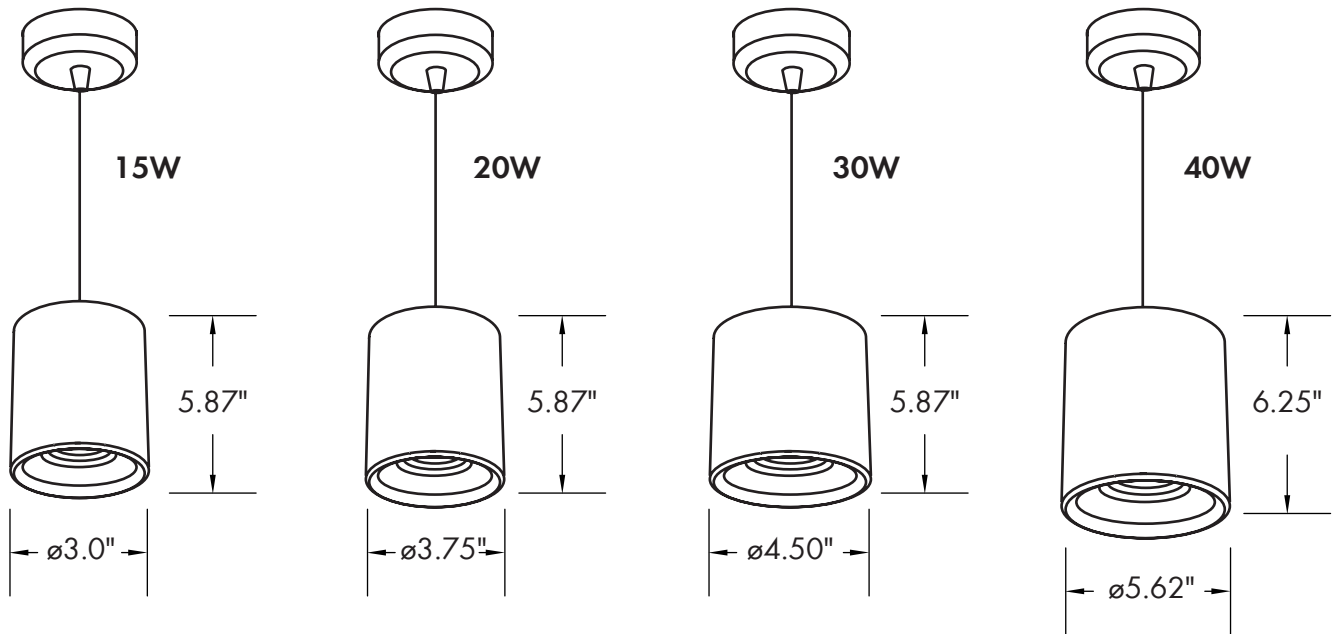

Surface Mount

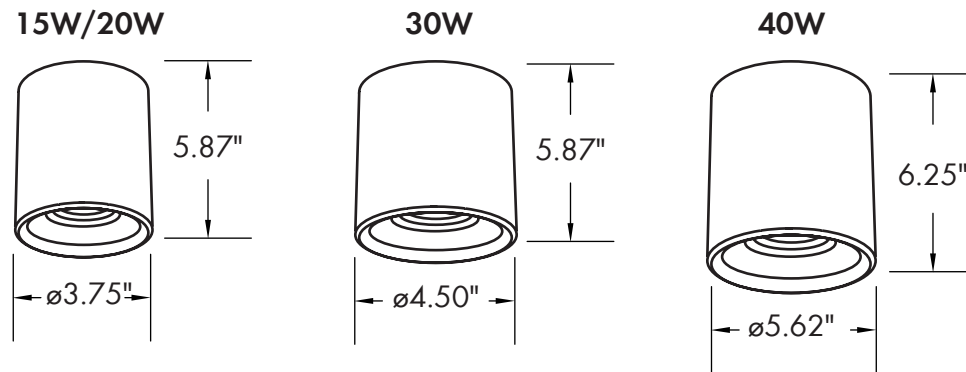

LUMEN OUTPUT

SKU	Size [DxH] (in)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
HXR-0305-15-30-15-D-BK-WH-XX	ø3 x 6	15	1200	80
HXR-0305-20-30-15-D-BK-WH-XX	ø3.75 x 6	20	1400	70
HXR-0405-30-30-15-D-BK-WH-XX	ø4.5 x 6	30	2400	80
HXR-0506-40-30-15-D-BK-WH-XX	ø5.6 x 6	40	3200	80