

Date:	
Project Name:	
SKU #:	

ThinTek™ Mini R

Surface Mount Downlight



APPLICATIONS

Residential, Commercial, Multi-Family Complex

FEATURES

Construction

- Injection Molded PC Housing
- Integrated driver with short circuit protection.

Finish

- White Trim [Standard]
 - Satin Nickel Trim
 - Matte Black Trim
 - Chrome Trim
- [Trim Options Sold Separately]

Electrical & Technical

- Input Voltage: 120V
- Input Frequency: 60Hz
- Projected L70: > 60,000 hrs
- PF: >0.9
- CRI: >80 or >90 [Option]
- THD: <20%
- CCT Selectable: 3000K/4000K/5000K
- Operating Temp.: -4°F ~ 104°F
- Damp Location Rated

Optical

- Edge-lit
- 110° Beam Angle

Installation/Mounting

- Surface Mounted
- Recessed Housing Mounting:
 - Torsion Clip Kit Mounting (4")
 - Friction Clip Kit Mounting (5"/6")

Controls

- Triac Dimming

Compliance

- JA8 TITLE 24 Compliant at 90CRI

Dimmer Compatibility List:

Leviton: 6672-1LW

Lutron: : MACL-153MR-WH, SCL-153P-WH, PD-6WCL-WH, CTCL-153P-WH,
MSCI-OP153M-WH, DVCL-153P-WH

Lumen Output

- 5"/6W: 400lm
- 7"/12W: 1,000lm
- 9"/18W: 1,530lm
- 12"/24W: 2,160lm

Warranty

- 36,000 Hours Warranty
See warranty documentation for more information.

 **ORDERING INFORMATION**


EXAMPLE: 881224-R-TM-CC

[illegible]

[Choose Trim Size and Finish]

Example: 8805-R-BL

DIMENSIONS

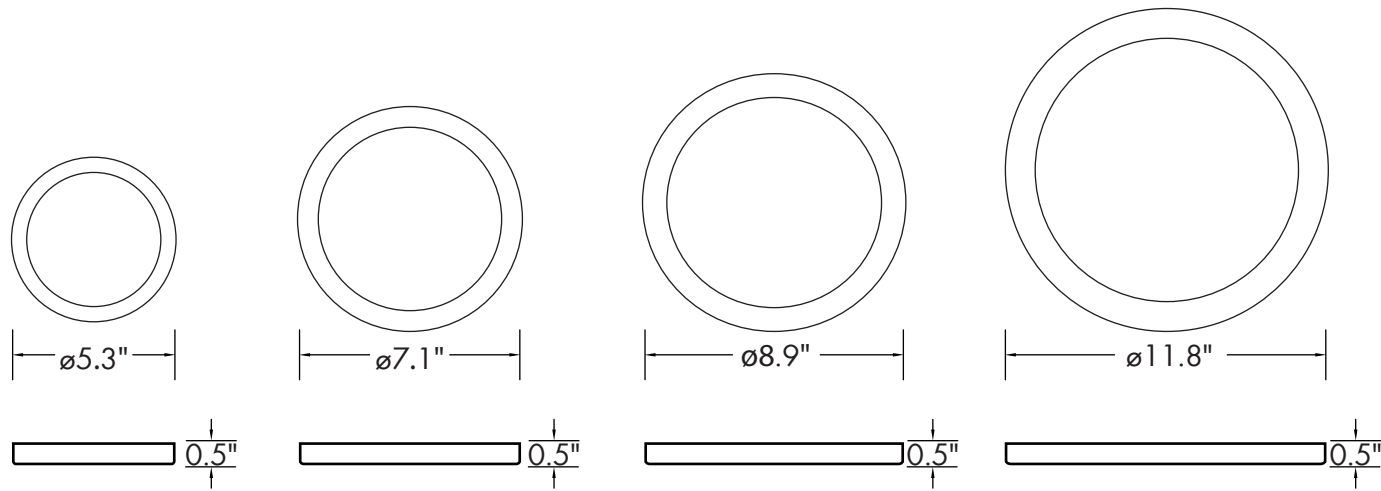

LUMEN OUTPUT

SKU	Size (in)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
880506-R-TM-CC	5	6	400	67
880712-R-TM-CC	7	12	1000	83
880918-R-TM-CC	9	18	1530	85
881224-R-TM-CC	12	24	2160	90

ACCESSORIES

Flush Mount
(Standard)

Friction Clip
Retrofit Kit
(4" Recessed Housing)
88-FC

Torsion Clip
Retrofit Kit
(5"/6" Recessed Housing)
88-TC-R

Satin Nickel Trim
(Option)
[SN]

Matte Black Trim
(Option)
[BK]

Chrome Trim
(Option)
[CH]