



U-Bend Series LED TUBE


DESCRIPTION: U-Bend LED TUBE
ITEM NUMBER: 70401-X-C / 70411-X-F

FEATURES


High-efficiency solid state LED array, advanced thermal management and optical diffuser, 70%+ savings in energy consumption, minimum, 50,000 hour life, wide voltage and constant current design, shock & vibration resistant, mercury-free, 100% recyclable, no ballast, no noise, no flicker. UL listed.

APPLICATIONS

Offices	Buses
Classrooms	Trains
Lobbies	Warehouse
Restaurants	Parking Lots
Malls	
Hotels	

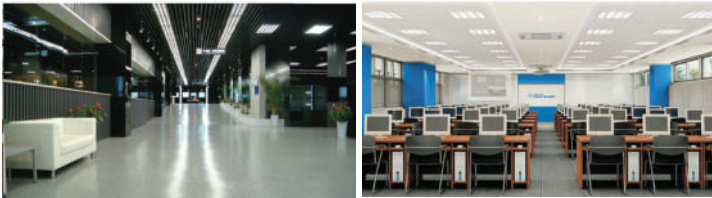

REPLACES



40W Fluorescent U-Bend.

TECHNICAL PARAMETERS

Life Span: 50,000
Fixture Material: Aluminum Base & PC Cover
IP Rating: N/A
Dimensions: 26x600mm (1x23.62in)
Dimmable: No
Thermal Layer Material: Aluminum Profile


OPTICAL PARAMETERS

LED Chip Type: SMD
LED Chip Quantity: 120
Lumens: 1980
Color Temperature: 5000~5500K (1)
 4000~4500K (2)
 3000~3500K (3)
CRI: ≥ 80
Beam Angle: 120°
Base: Two Pin(G13)
Cover: Clear or Frosted

ELECTRICAL PARAMETERS

Input Voltage: 120-277VAC
Total Power Consumption: 18W
Power Factor: > .95



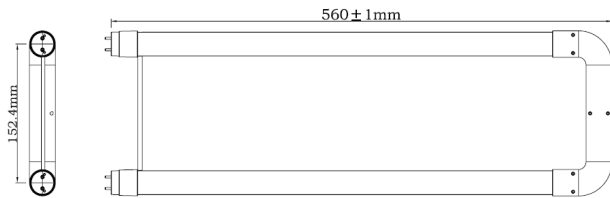

Ordering Information – **U-BEND 18W**

704011 U-Bend LED 18W (5000K-5500K) - C

704012 U-Bend LED 18W (4000K-4500K) - C

704013 U-Bend LED 18W (3000K-3500K) -C

704111 U-Bend LED 18W (5000K-5500K) - F

704112 U-Bend LED 18W (4000K-4500K) - F

704113 U-Bend LED 18W (3000K-3500K) - F

Due to advancements in technology, specifications are subject to change without notice.

All images are copyright Truly Green Solutions, Inc. and may be only be used with permission.

WARNING: READ INSTRUCTIONS BEFORE INSTALLING

Disconnect all power sources to the fixtures before installing.