



### Warning!

- Disconnect power before installation.
- Fixtures must be installed by a qualified electrician in accordance with National Electric Code (NEC) and all applicable local building and electrical codes for your area.
- Avoid looking directly at the LED light source.
- Electrostatic sensitive devices (ESD). Handle with necessary precautions to avoid ESD.
- Do not use chemicals or abrasives to clean this product. Use a soft mat only. Avoid scratching the surface.


#### ① Plate Installation

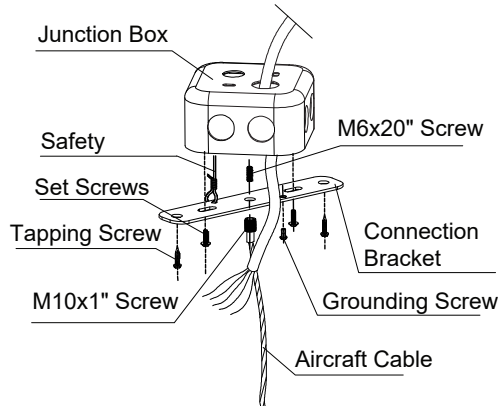


#### ② Installing Wire Ropes

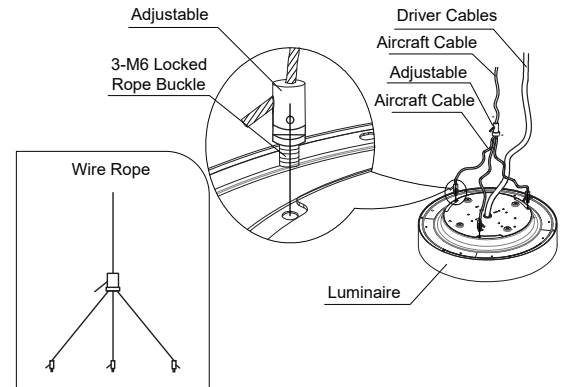


#### ③ Wiring Diagram

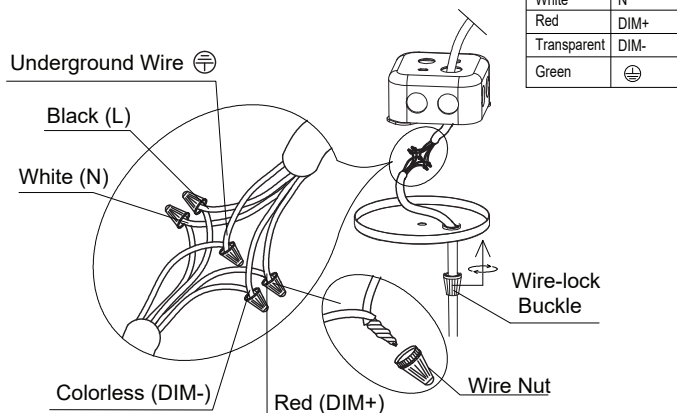


#### ④ Canopy Installation

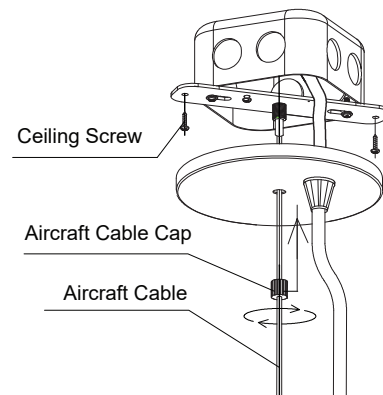

#### ⑤ Adjust Wire Cable

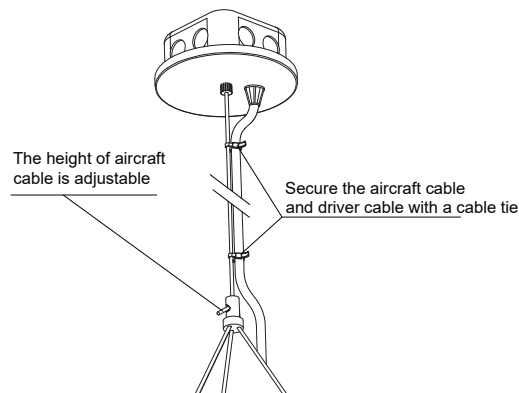

#### ⑥ Finished

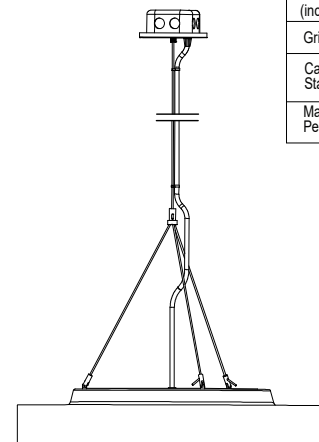


Cable Diameter (inches)	5/64
Gripper Series	GR
Cable Material: Stainless Steel	SS
Max. Weight for Per Cable (lbs.)	65


### Warning!

- Disconnect power before installation.
- Fixtures must be installed by a qualified electrician in accordance with National Electric Code (NEC) and all applicable local building and electrical codes for your area.
- Avoid looking directly at the LED light source.
- Electrostatic sensitive devices (ESD). Handle with necessary precautions to avoid ESD.
- Do not use chemicals or abrasives to clean this product. Use a soft mat only. Avoid scratching the surface.


- ① Press down and then rotate clockwise to remove the surface mount plate.

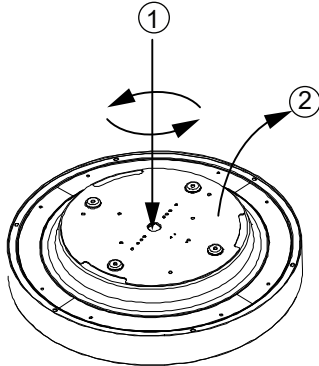


- ② Installation sequence for securing surface mount plate

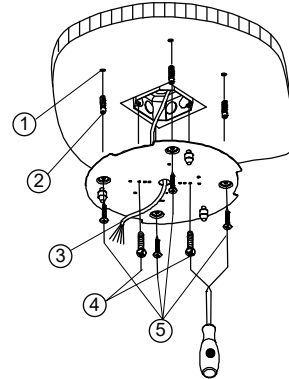


- ③ Attaching safety cables

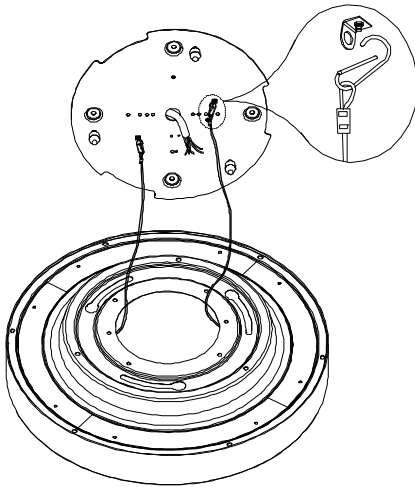


- ④ Wiring Diagram

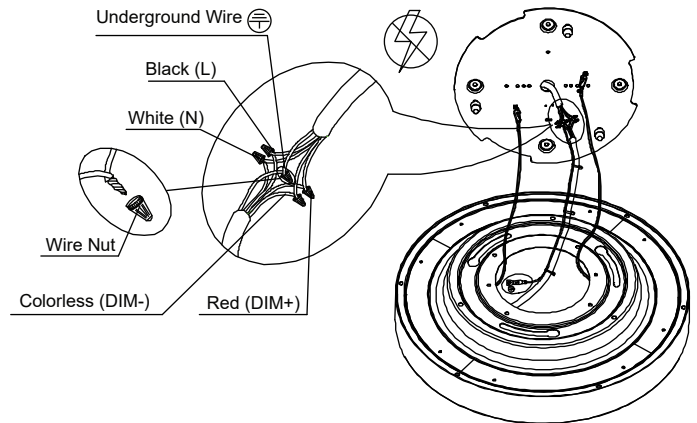

- ⑤ Align mounting points and spin to lock in to position.

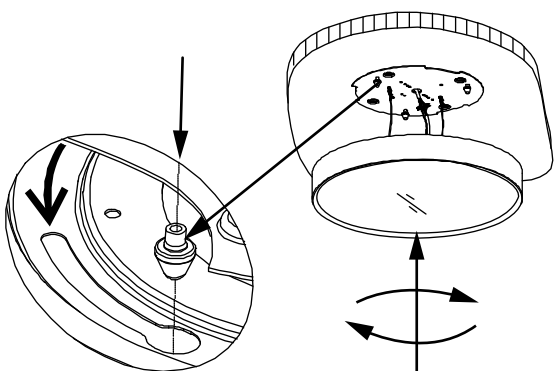


- ⑥ Finished

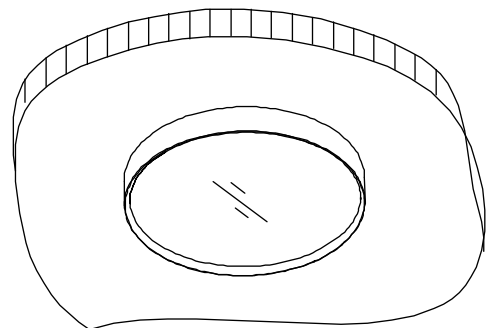


### Warning!

- Disconnect power before installation.
- Fixtures must be installed by a qualified electrician in accordance with National Electric Code (NEC) and all applicable local building and electrical codes for your area.
- Avoid looking directly at the LED light source.
- Electrostatic sensitive devices (ESD). Handle with necessary precautions to avoid ESD.
- Do not use chemicals or abrasives to clean this product. Use a soft mat only. Avoid scratching the surface.


#### ① Install Link Header to stem.

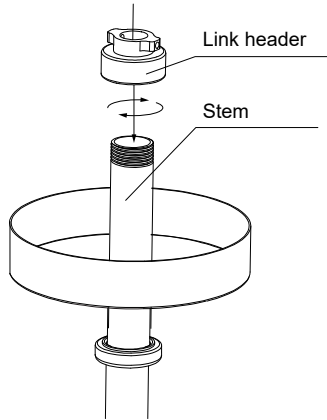


#### ② Install connection plate to link header and secure with safety rope. Secure connecting plate with screws.

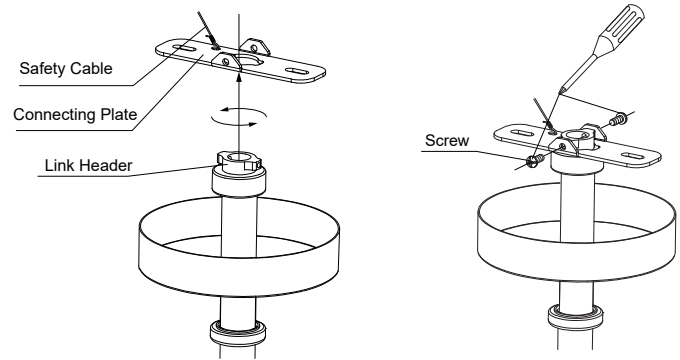


#### ③ Slide power cable through stem and tighten the stem to fixture.

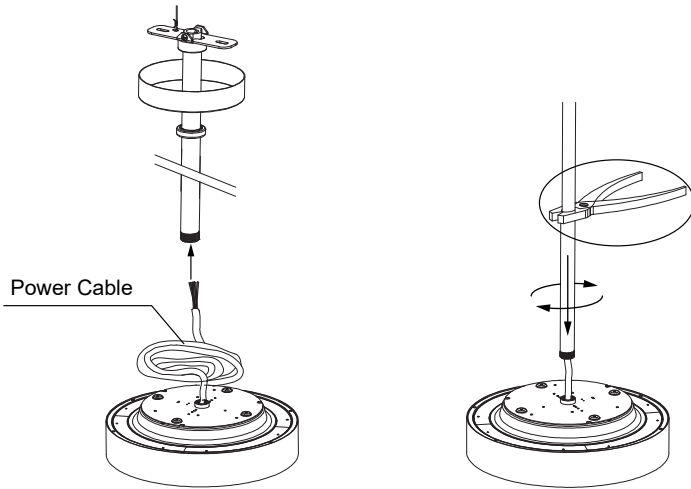


#### ④ Screw the connecting plate to junction box.

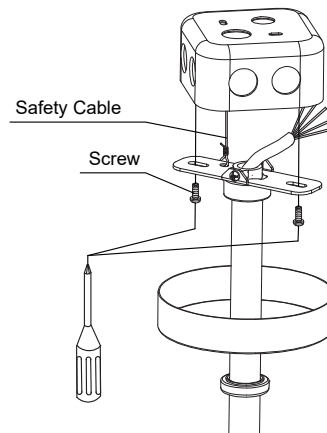


#### Wiring Diagram

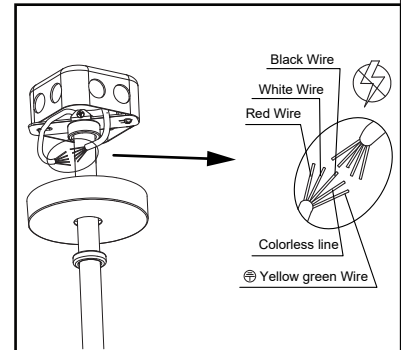

#### ⑤ Slide Canopy into place with locking ring

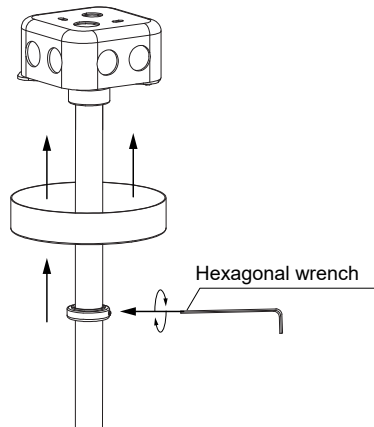

#### ⑥ Finished Single Stem for 18"/24"/30"/36"

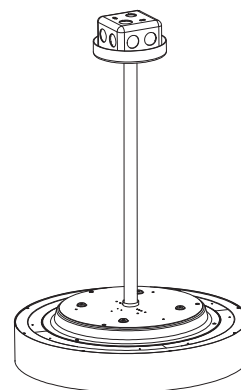

#### Three Stem for 48"

