OUTDOOR

tgs

Date:	
Project Name:	
Sku #:	

CUDWR™ With EM

Cylinder Up and Down Light Wall Mounted

EM Power | Power Selectable | Field Selectable (5CCT)

APPLICATIONS

Residential, Commercial, Multi-Family, Hospitality

FEATURES

Construction

- Die-cast Aluminum Base
- Spun Aluminum Body
- Per ANSI C136.31-2001: 3G Vibration
- Corrision Resistant Finish

Electrical & Technical

- Input Voltage: 110-277V
- Input Frequency: 60Hz
- Projected Life: L70 > 50,000 hrs
- PF: >0.9
- CRI: >90
- THD: <20%
- CCT Selectable: 2700K/3000K/ 3500K/4000K/5000K
- Operating Temp.: -13°F~104°F
- Suitable for Wet Location
- Integral 2.5kV Surge Suppression Protection [Standard]
- Emergency Battery Backup 4W [Option] [Factory Installed]

Lumen Output

- 10W: 1,000lm: Uplight: 500lm/Down: 500lm
- 15W: 1,500lm: Uplight: 750lm/Down: 750lm
- 20W: 2,000lm: Uplight: 1,000lm/Down: 1,000lm

Finish

- Black
- Bronze
- Grey*
- White*

Optical

- Precision-Molded Acrylic Lenses

Installation/Mounting

- Wall Mounted: Suitable for 3" & 4" Junction Box

Compliance

- JA8 TITLE 24 Compliant

Warranty

- 5 Year Warranty

See warranty documentation for more information.

FINISHES

Standard



Black | Bronze

Custom* [MOQ 200 PCS]



White* | Grey*

90+ CRI | Wet Location | cULus LISTED | CALIFORNIA JA8 TITLE 24 COMPLIANT LAMP

ORDERING INFORMATION

EXAMPLE: CUDWR-0411-L-C-BK-90CRI-EM

CUDWR

Series	Size	Wattage	CCT	Finish	CRI	Emergency Battery
CUDWR	0411 - D: 4"x H: 11"	L - 10W/15W/20W	C - 2700K/3000K/3500K/4000K/5000K	BK - Black BZ - Bronze WH - White* GR - Grey*	90CRI	EM - 4W Emergency Battery Backup

CUDWR™ With EM

Cylinder Up and Down Light Wall Mounted

DIMENSIONS

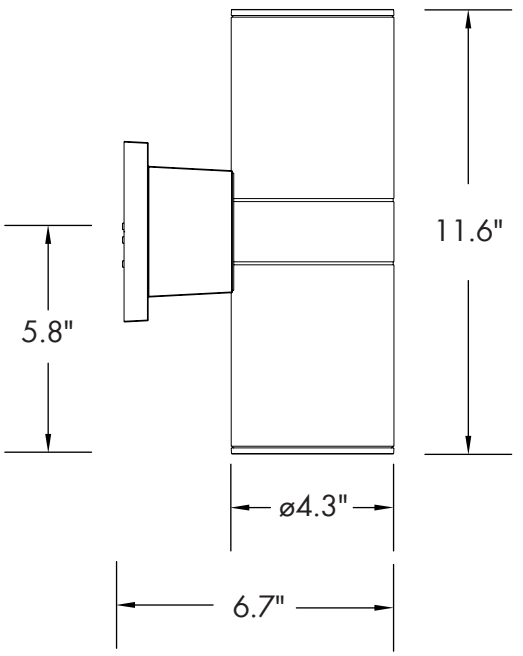

Weight: 3.2 lb.

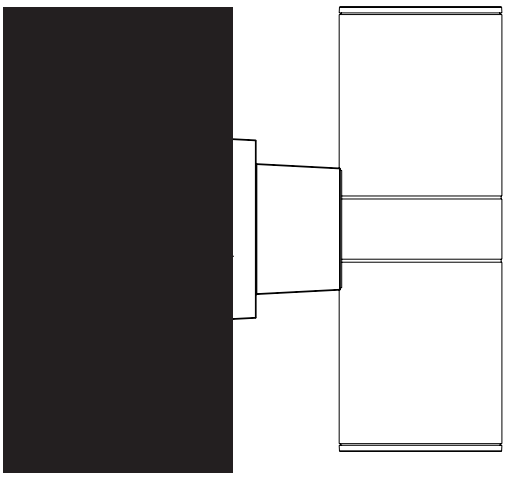

Flush Mount

LUMEN OUTPUT

SKU	Size [DxH] (in)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)
CUDWR-0411-L-C-XX-90CRI-EM	4 x 11	10/15/20	1000	100	1500	100	2000	100

ACCESSORIES

4W Emergency Battery Backup
[Factory Installed]
[EM]

9601 Variel Ave, Chatsworth, CA 91311
(818) - 206 - 4404

Specifications & dimensions subject to change without notice.
*MOQ & longer lead times may apply, please contact customer service for more information.