


Date:	
Project Name:	
SKU #:	

ICON R2™
Icon Series Round Downlight 2"



RTM - Round Trim



RTL - Round Trimless

APPLICATIONS

Residential, Commercial, Multi-Family Complex

FEATURES

Construction

- Aluminum Housing

Finish

- White Trim
- Black Trim [Option]

Electrical & Technical

- Input Voltage: 120VAC
120-277VAC [Option]
- Input Frequency: 60Hz
- Projected Life: L70 > 50,000 hrs
- PF: >0.9
- CRI: >90
- THD: <20%
- CCT Selectable: 2700K/3000K/3500K/
4000K/5000K
- Operating Temp.: -4°F ~ 104°F
- Wet Location Rated
- IC Air-Tight Rated
- 8W Emergency Battery Backup
[Factory Install]

Optical

- White PC Lens
- Available Beam Angles:
 24° Narrow
 38° Medium
 60° Wide

Installation/Mounting

- Spring Clip Mount [W/Trim]
- Flush to Ceiling [Trimless]

Controls

- Triac Dimming [120V]
- 0-10V Dimming [120-277V]

Compliance


- JA8 TITLE 24 Compliant

Lumen Output

• 2"/8W: 600lm
• 2"/15W: 1000lm

Warranty



- 5 Year Warranty
See warranty documentation for more information.



ORDERING INFORMATION **EXAMPLE: ICON-R-2-8-5C-38-RTM-WH**

Series	Size	Wattage	CCT	Input Voltage	Beam Angle	Trim Type	Trim Finish	Options
ICON-R	2 - 2"	8 - 8W 15 - 15W	5C - 2700K/3000K/ 3500K/4000K/ 5000K	[Blank] - 120VAC U - 120-277VAC	24 - 24° 38 - 38° 60 - 60°	RTM - Round Trim RTL - Round Trimless	BK - Black WH - White	ICON-R-NC [New Construction Plate W/ Hanger Bar] FLEX-6 [6' Flexible Connector] FLEX-10 [10' Flexible Connector] FLEX-20 [20' Flexible Connector] EM [Emergency Battery Backup]


DIMENSIONS

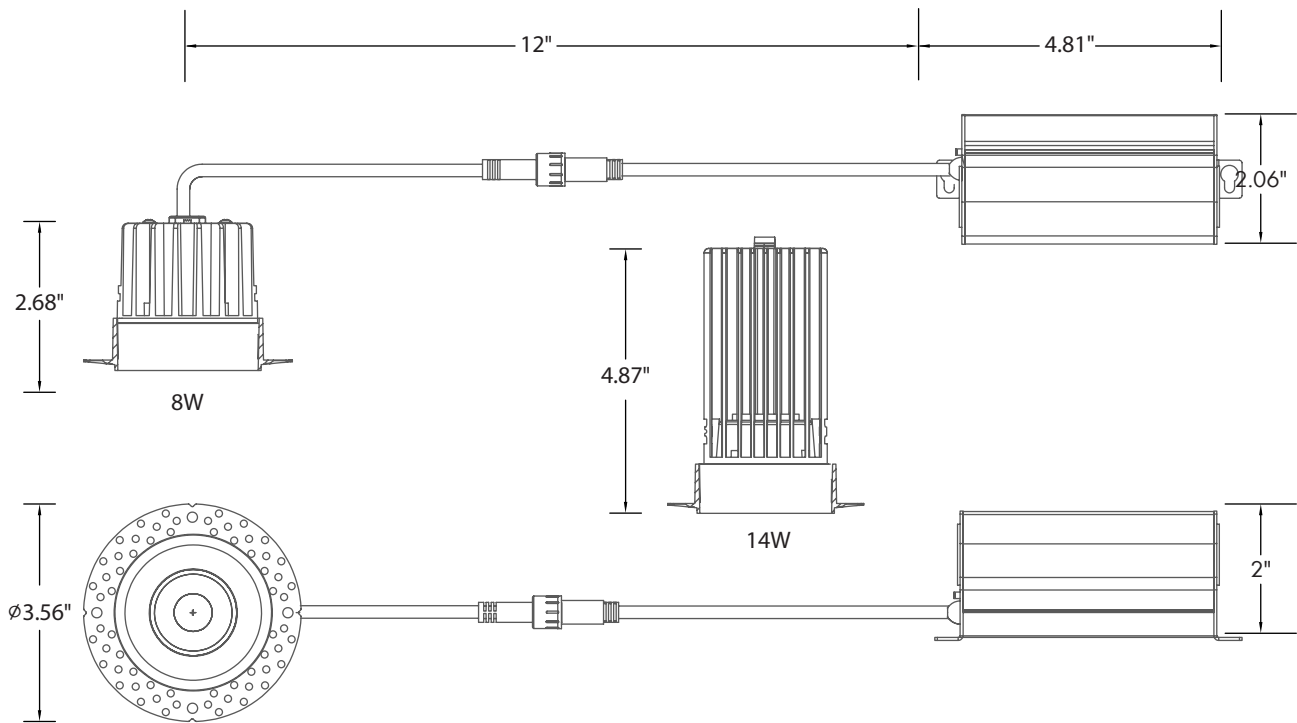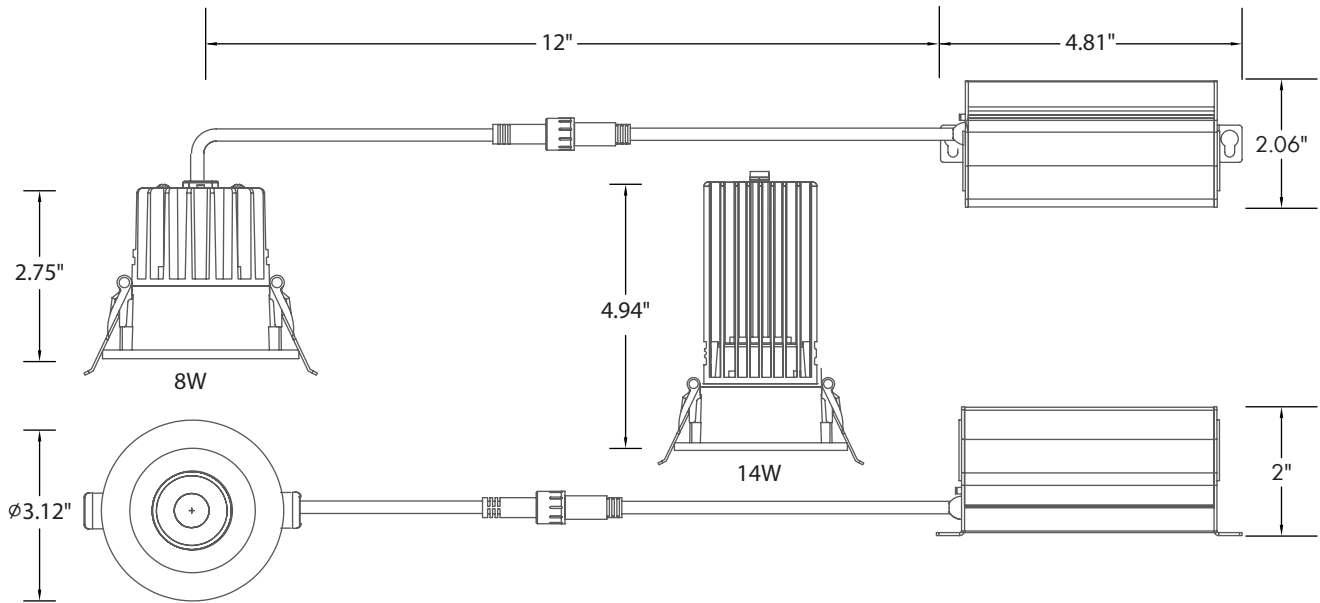

LUMEN OUTPUT

SKU	Size (in)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
ICON-R-2-8-5C-38-RTM-WH	2	8	600	75
ICON-R-2-15-5C-38-RTM-WH	2	15	1000	66

ACCESSORIES




Round Trim
[RTM]



Round Trimless
[RTL]



6'/10'/20'
Flexible Extension Connector
[FLEX-6]
[FLEX-10]
[FLEX-20]

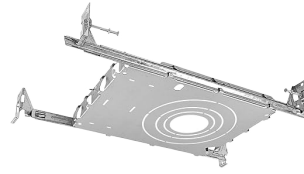

New Construction Kit
W/ Hanger Bar
2"/3"/3.5"/4"
[ICON-R-NC]



8W
Emergency Battery Backup
[EM]

COMPLETED PRODUCT



ICON R2™
Round Trim



ICON R2™
Round Trimless