


Date:	
Project Name:	
SKU #:	

ICON R2™
Icon Series Round Downlight 2"



TRIM FINISH See Page 3 for All Available Trim Types



APPLICATIONS

Residential, Commercial, Multi-Family

FEATURES

- | | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Construction</p> <ul style="list-style-type: none"> - Aluminum Housing | <p>Finish</p> <ul style="list-style-type: none"> - White Trim - Black Trim [Option] |
| <p>Electrical & Technical</p> <ul style="list-style-type: none"> - Input Voltage: 120VAC
120-277VAC [Option] - Input Frequency: 60Hz - Projected Life: L70 > 50,000 hrs - PF: >0.9 - CRI: >90 - THD: <20% - CCT Selectable: 2700K/3000K/3500K/4000K/5000K - Dim to Warm: 3000K-1800K [Option] - Operating Temp.: -4°F ~ 104°F - Wet Location Rated - IC Rated/Airtight Rated - 25W Emergency Battery Backup [Option] | <p>Optical</p> <ul style="list-style-type: none"> - White PC Lens - Available Beam Angles: 24° Narrow 38° Medium 60° Wide |
| <p>Controls</p> <ul style="list-style-type: none"> - Triac Dimming [120V] - Dual Mode:
0-10V Dimming [120-277V] [Dims to 1%] + Triac Dimming [120V] | <p>Installation/Mounting</p> <ul style="list-style-type: none"> - Spring Clip Mount [W/Trim]:
Ceiling Cutout: Ø2 7/8" - Flush to Ceiling [Trimless]
Ceiling Cutout: Ø2 7/8" |
| <p>Dimmer Compatibility List:</p> <ul style="list-style-type: none"> - See Page 4 | <p>Compliance</p> <ul style="list-style-type: none"> - JA8 TITLE 24 Compliant |
| <p>Lumen Output</p> <ul style="list-style-type: none"> - See Page 3 | <p>Warranty</p> <ul style="list-style-type: none"> - 5 Year Warranty See warranty documentation for more information. |







ORDERING INFORMATION **EXAMPLE: ICON-R-2-8-5C-38-RTM-WH**

Series	Size	Wattage	CCT	Input Voltage	Beam Angle	Trim Type	Trim Finish
ICON-R	2 - 2"	8 - 8W 15 - 15W	5C - 2700K/3000K/ 3500K/4000K/ 5000K	[Blank] - 120VAC U - 120-277VAC	24 - 24° 38 - 38° 60 - 60°	RTM - Round Trim RTL - Round Trimless RST - Round Slope Trim	BK - Black WH - White
			DW - Dim to Warm (3000K-1800K)	T - 120VAC			

Accessories

- ICON-SR-2-4-NCH [New Construction Plate W/ Hanger Bar]
- ICON-SR-2-3-NC [New Construction Plate For Trim]
- ICON-R-2-TL-NC [New Construction Plate For Trimless]
- FLEX-6 [6' Flexible Connector]
- FLEX-10 [10' Flexible Connector]
- FLEX-20 [20' Flexible Connector]
- EM [25W Emergency Battery Backup]

DIMENSIONS

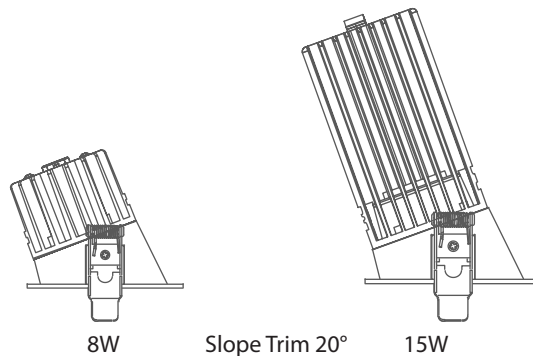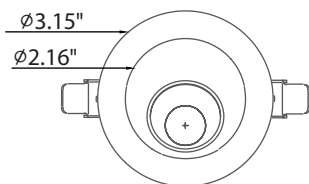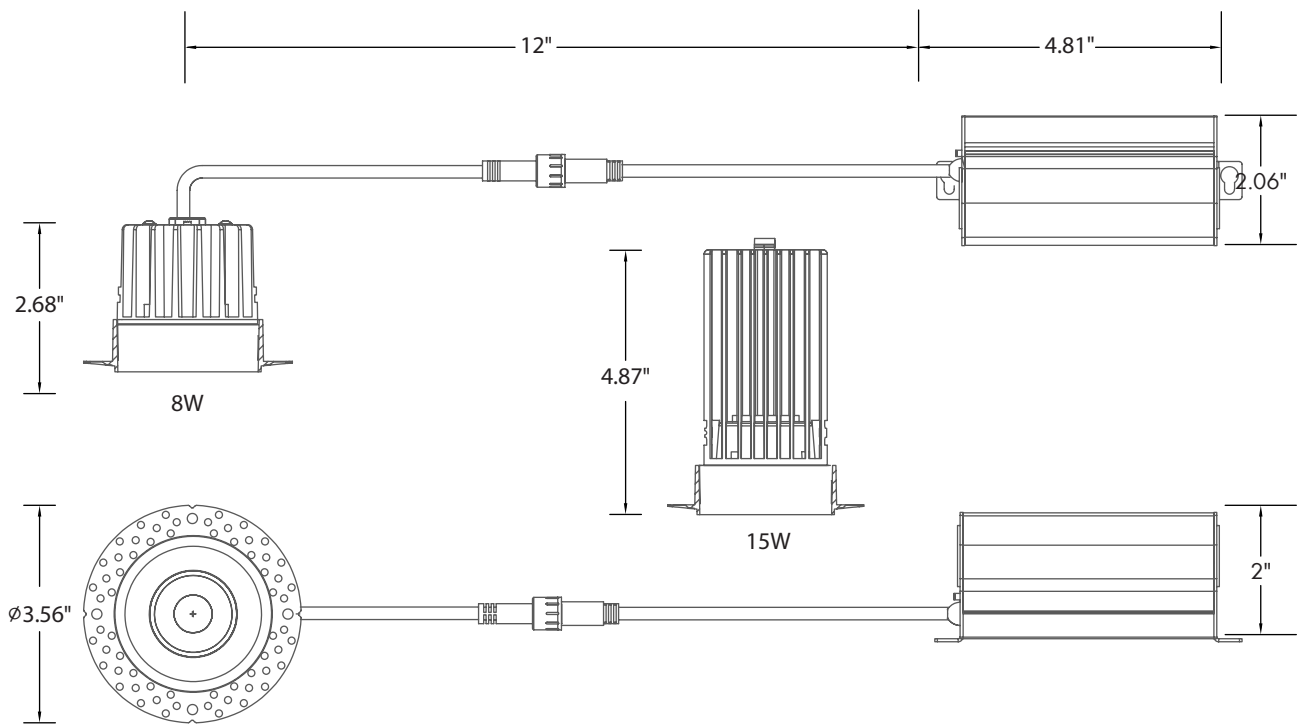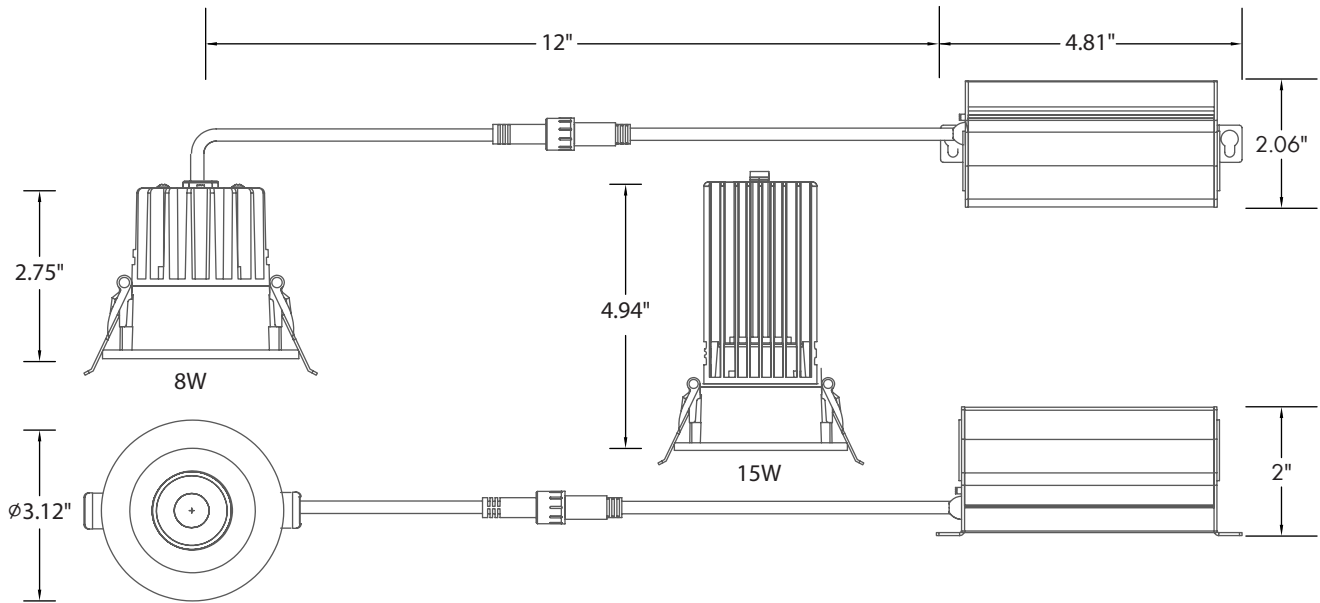


LUMEN OUTPUT

SKU	Size (in)	Wattage (W)	Beam Angle	2700K		3000K		3500K		4000K		5000K	
				Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)
ICON-R-2-8-5C-24-RTM-WH	2	8	24°	699	94	732	99	766	105	778	105	773	102
ICON-R-2-8-5C-38-RTM-WH	2	8	38°	543	68	575	72	628	79	660	75	681	85
ICON-R-2-8-5C-60-RTM-WH	2	8	60°	633	85	660	89	690	95	701	95	696	92
ICON-R-2-15-5C-24-RTM-WH	2	15	24°	1105	84	1161	91	1207	97	1227	96	1190	90
ICON-R-2-15-5C-38-RTM-WH	2	15	38°	921	61	984	66	1088	73	1153	77	1187	79
ICON-R-2-15-5C-60-RTM-WH	2	15	60°	970	74	1018	80	1059	85	1076	84	1043	79

Dim to Warm				3000K			
SKU	Size (in)	Wattage (W)	Beam Angle	Delivered Lumens (lm)		Efficacy (lm/W)	
ICON-R-2-8-DW-T-24-RTM-WH	2	8	24°	586		76	
ICON-R-2-8-DW-T-38-RTM-WH	2	8	38°	571		75	
ICON-R-2-8-DW-T-60-RTM-WH	2	8	60°	531		69	
ICON-R-2-15-DW-T-24-RTM-WH	2	15	24°	867		70	
ICON-R-2-15-DW-T-38-RTM-WH	2	15	38°	944		77	
ICON-R-2-15-DW-T-60-RTM-WH	2	15	60°	784		63	

ACCESSORIES

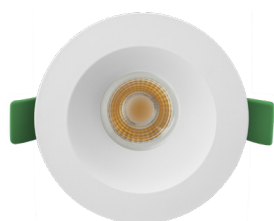


Round Trim [RTM]




Round Slope Trim [RTM]




Round Trimless [RTL]



New Construction Kit Plate [For Trimless] [ICON-R-2-TL-NC]

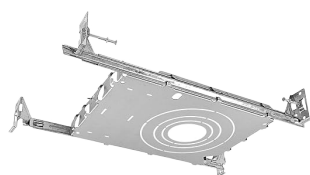

New Construction Kit W/ Hanger Bar [For Trim] [ICON-SR-2-4-NCH]



New Construction Kit Plate [For Trim] [ICON-SR-2-3-NC]



6'/10'/20' Flexible Extension Connector [FLEX-6] [FLEX-10] [FLEX-20]



25W Emergency Battery Backup [EM]

COMPLETED PRODUCT



ICON R2™
Round Trim



ICON R2™
Round Slope Trim



ICON R2™
Round Trimless

DIMMER COMPATABILITY LIST

TRIAC Dimming:

Leviton: 6672, 6674, IPL06

Lutron: LECL-153P, CTCL-150H, LGCL-153PLH, CTCL-153P, SCL-153P, S-600P, PD-6WCL, PD-5NE, PD-10NXD, DVCL-153P, TGCL-153P, AYCL-153P, MACL-153M

Eaton: AAL06

Pass & Seymour: DCL453PTCCCV6

GE: 10464, 18027

0-10V Dimming:

Leviton: Illumitech - IP7

Lutron: Diva - DDTV, Diva - NDTV, Nova T - NTFTV

Watt Stopper: DCLV1

Lightolier Controls: ZP600FAM120

Philips: Sunrise - SR1200ZTUNV