SOLAR™

Cable Mounting: Installation Instructions

Warning!

- Disconnect power before installation.
- Fixtures must be installed by a qualified electrician in accordance with National Electric Code (NEC) and all applicable local building and electrical codes for your area.
- Avoid looking directly at the LED light source.
- Electrostatic sensitive devices (ESD). Handle with necessary precautions to avoid ESD.
- Do not use chemicals or abrasives to clean this product. Use a soft mat only. Avoid scratching the surface.

① Plate Installation

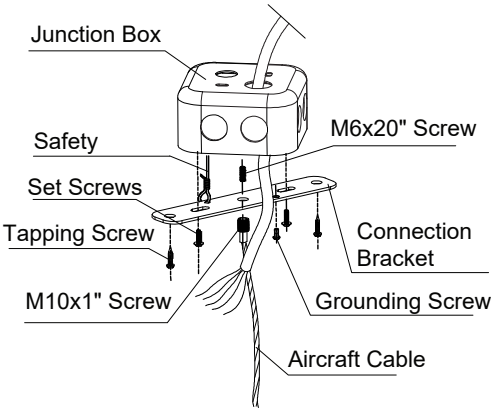

② Installating Wire Ropes

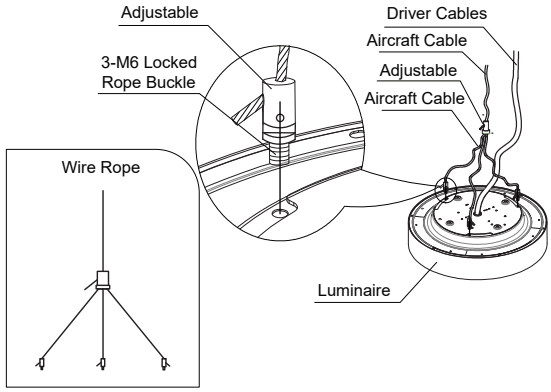

③ Wiring Diagram

Black	L
White	N
Red	DIM+
Transparent	DIM-
Green	⏚

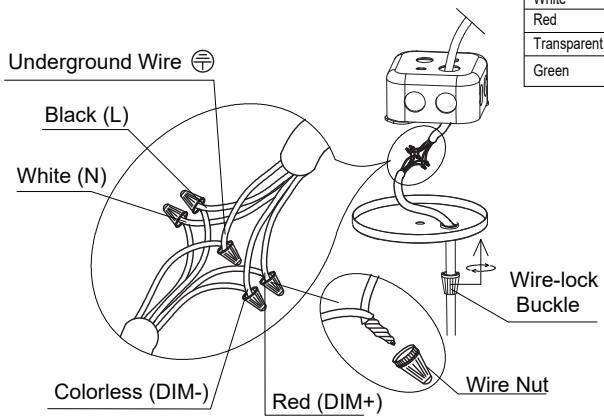

④ Canopy Installation

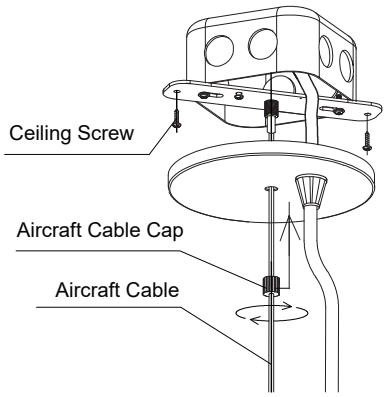

⑤ Adjust Wire Cable

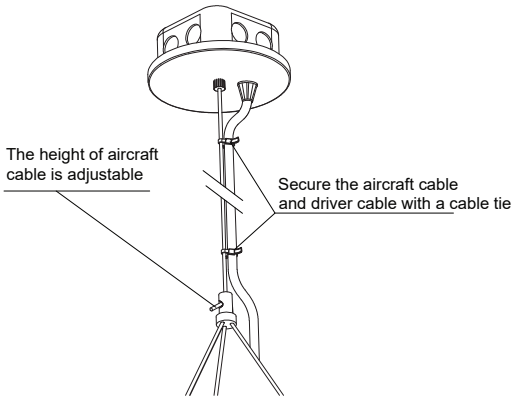

⑥ Finished

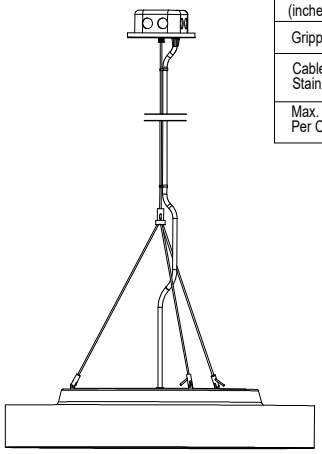

Cable Diameter (inches)	5/64
Gripper Series	GR
Cable Material: Stainless Steel	SS
Max. Weight for Per Cable (lbs.)	65

SOLAR™
Surface Mounting: Installation Instructions

Warning!

- Disconnect power before installation.
- Fixtures must be installed by a qualified electrician in accordance with National Electric Code (NEC) and all applicable local building and electrical codes for your area.
- Avoid looking directly at the LED light source.
- Electrostatic sensitive devices (ESD). Handle with necessary precautions to avoid ESD.
- Do not use chemicals or abrasives to clean this product. Use a soft mat only. Avoid scratching the surface.

① Press down and then rotate clockwise to remove the surface mount plate.

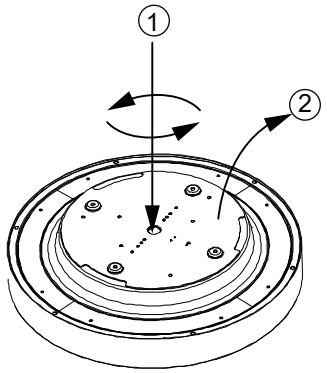

② Installation sequence for securing surface mount plate

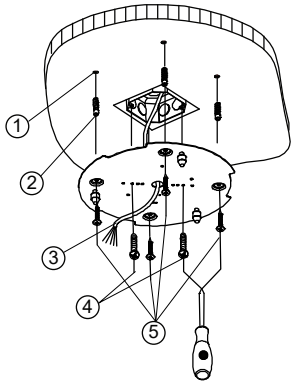

③ Attaching safety cables

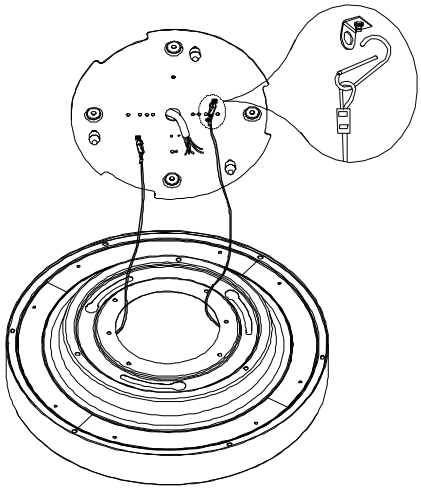

④ Wiring Diagram

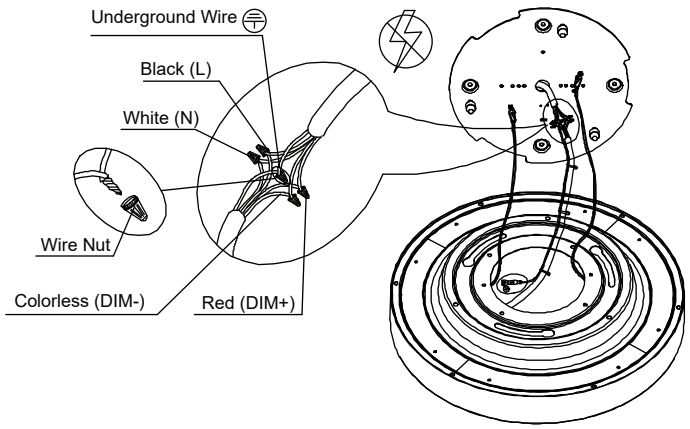

⑤ Align mounting points and spin to lock in to position.

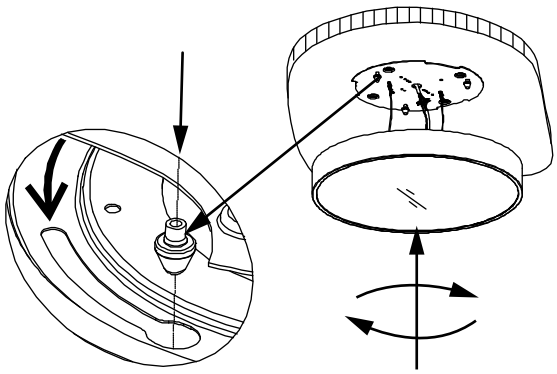

⑥ Finished

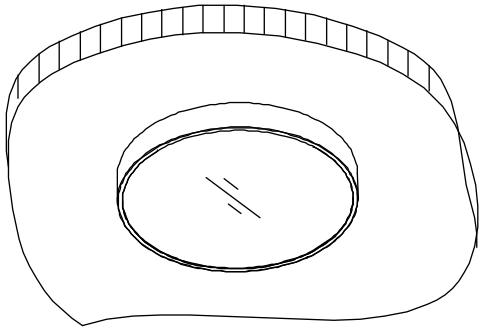

SOLAR™
Pendant Mounting: Installation Instructions

Warning!

- Disconnect power before installation.
- Fixtures must be installed by a qualified electrician in accordance with National Electric Code (NEC) and all applicable local building and electrical codes for your area.
- Avoid looking directly at the LED light source.
- Electrostatic sensitive devices (ESD). Handle with necessary precautions to avoid ESD.
- Do not use chemicals or abrasives to clean this product. Use a soft mat only. Avoid scratching the surface.

① Install Link Header to stem.

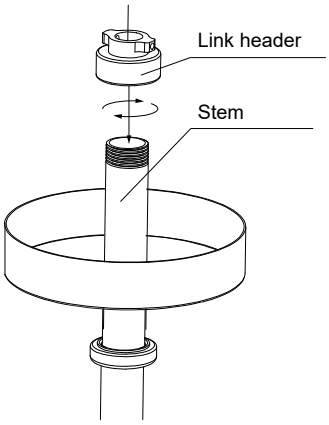

② Install connection plate to link header and secure with safety rope. Secure connecting plate with screws.

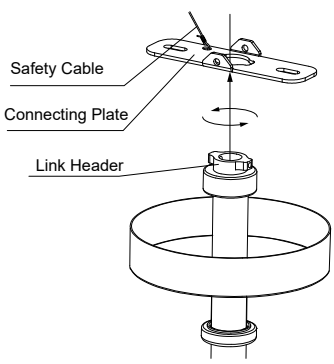

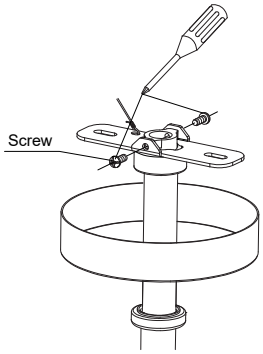

③ Slide power cable through stem and tighen the stem to fixture.

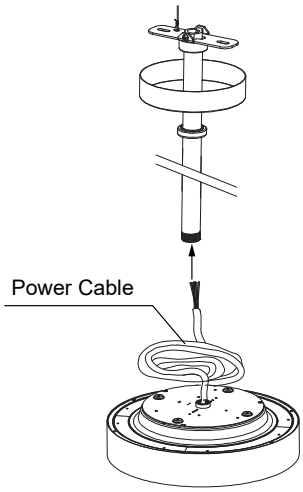

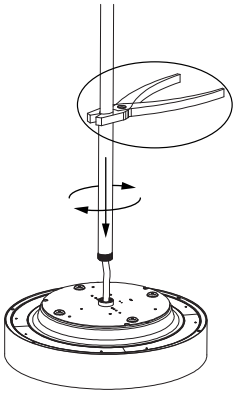

④ Screw the connecting plate to junction box.

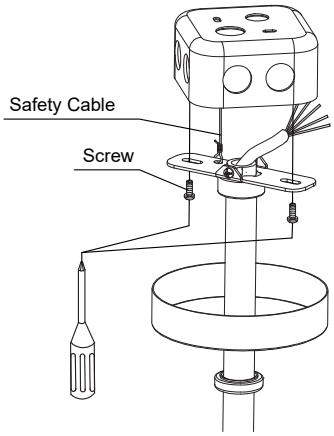

Wiring Diagram

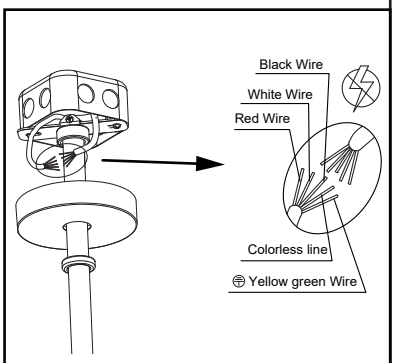

⑤ Slide Canopy into place with locking ring

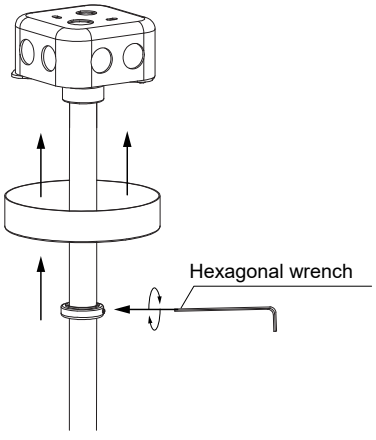

⑥ Finished

Single Stem for 18"/24"/30"/36"

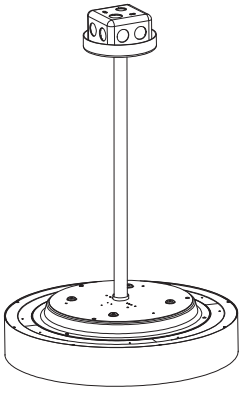
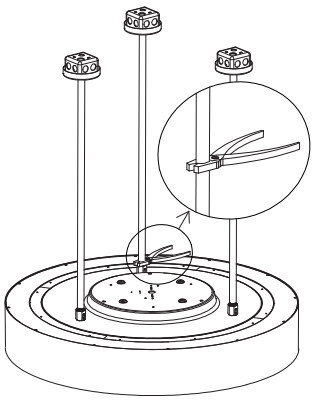
Three Stem for 48"