


Date:	
Project Name:	
SKU #:	

SL™
Surface Linear Edgelit Panel

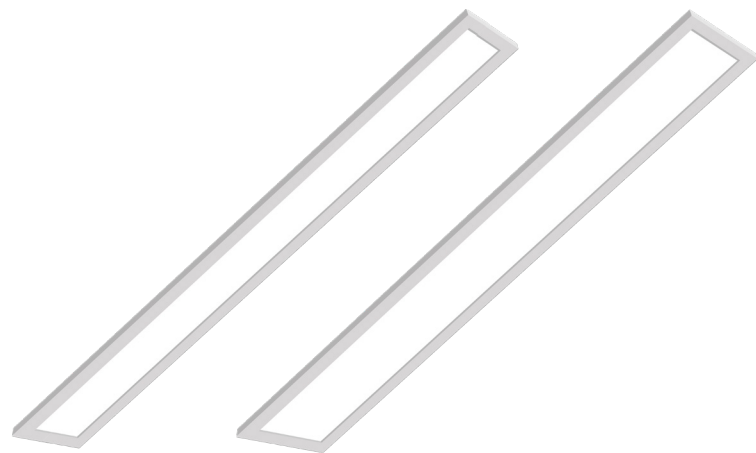

APPLICATIONS

Commercial, Retail, Institution, and Hospitality

FEATURES

- | | |
|--|--|
| <p>Construction</p> <ul style="list-style-type: none"> - Extruded Aluminum Frame & Stamped Aluminum Housing - Acrylic Prismatic Light Guide Panel: Excellent Shielding & Fully Illuminated Appearance. | <p>Finish</p> <ul style="list-style-type: none"> - White |
| <p>Electrical & Technical</p> <ul style="list-style-type: none"> - Input Voltage: 100-277VAC - Input Frequency: 50/60Hz - Projected L70 > 54,000 hrs - PF: >0.9 - CRI: 80 [Standard] or 90 [Option]* - THD: <20% - CCT Selectable: 3000K/3500K/4000K - Operating Temp.: -22°F ~ 122°F - Damp Location Rated - Integrated Driver - 15W Emergency Inverter [Option] | <p>Optical</p> <ul style="list-style-type: none"> - Frosted Diffuser - 110° Beam Angle with Uniformed Edge to Edge Illumination |
| <p>Controls</p> <ul style="list-style-type: none"> - 0-10V Dimming | <p>Installation/Mounting</p> <ul style="list-style-type: none"> - Surface Mount |
| <p>Lumen Output</p> <ul style="list-style-type: none"> • SL4-4: 20W (1,680lm)
30W (2,520lm)
40W (3,400lm) • SL4-6: 20W (1,800lm)
30W (2,650lm)
40W (3,600lm) | <p>Warranty</p> <ul style="list-style-type: none"> - 5 Year Warranty See warranty documentation for more information. |




ORDERING INFORMATION **EXAMPLE: SL4-4-L-C-U-D-SK**

Series	Size	Wattage	CCT	Input Voltage	Control	Mounting Options	CRI Option
SL4	4 - 4" 6 - 6"	L-20W/30W/40W	C - 3000K/3500K/4000K	U - 100-277VAC	D - 0-10V Dimming	SK - Surface Mount RM - Recessed Mount	90CRI* (Option)

Accessories
TGS-15W-INT (15W Emergency Inverter)

DIMENSIONS

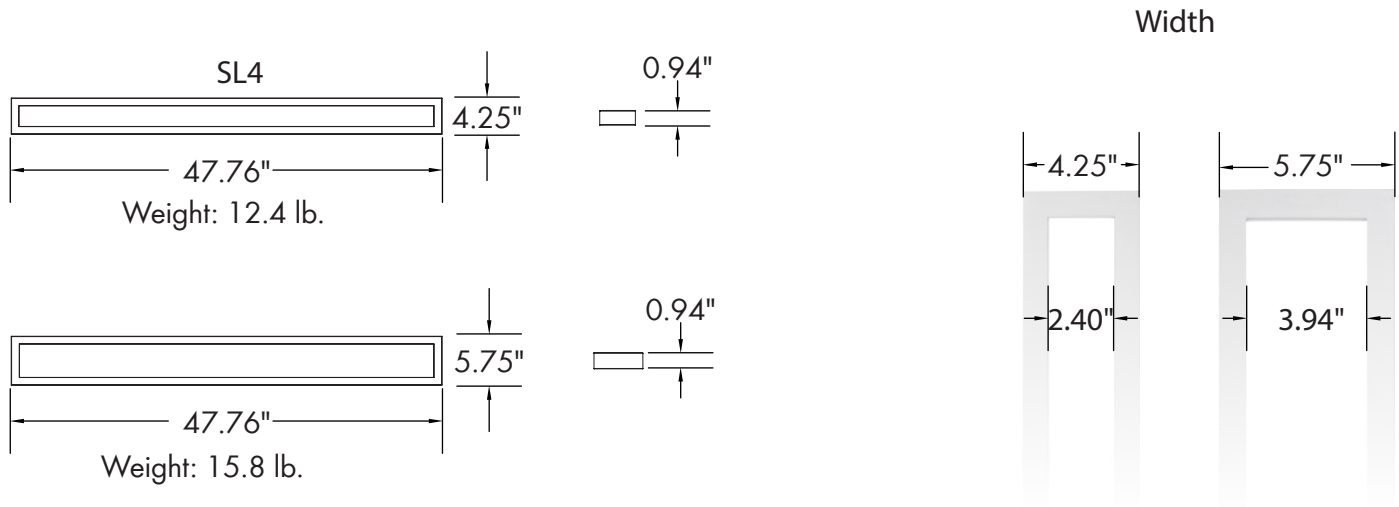

LUMEN OUTPUT

SKU	Size [L x W] (in)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
SL4-4-L-C-U-D	48 x 4	20/30/40	1680/2520/3400	84
SL4-6-L-C-U-D	48 x 6	20/30/40	1800/2650/3600	90

ACCESSORIES



Surface Mount Plate
[Included]



Emergency Inverter 15W
(Option)
[TGS-15W-INT]