INDOOR

tgs

Date:	
Project Name:	
Sku #:	

Decorative Dome Round Fixture

Flush Mount Ceiling Light

5CCT
Field Selectable

APPLICATIONS

Residential, Commercial, Multi-Family Complex

FEATURES

Construction

- Steel Housing with Powder Coating Paint.

Finish

- Bronze
- Satin Nickel

Electrical & Technical

- Input Voltage: 120V
- Input Frequency: 60Hz
- Projected Life: L70 > 50,000 hrs
- PF: >0.95
- CRI:>83
- THD: <20%
- CCT Selectable: 2700K/3000K/3500K/ 4000K/5000K
- Operating Temp.: -4°F~104°F
- Damp Location Rated

Optical

- Plastic Lens

Installation/Mounting

- Flush Mounted Ceiling

Controls

- Triac Dimming

Lumen Output

- 11"/14W: 900lm
- 13"/15W: 900lm
- 15"/25W: 1,500lm

Warranty

- 5 Year Warranty
See warranty documentation for more information.

Damp Location

Intertek

ENERGY STAR

ORDERING INFORMATION

EXAMPLE: GSMF-1114-C-SN

GSMF			
Series	**Size/Wattage**	**CCT**	**Finish**
GSMF	1114 - 11"/14W 1315 - 13"/15W 1525 - 15"/25W	C - 2700K/3000K/3500K/4000K/5000K	BZ - Bronze SN - Satin Nicklel

Decorative Dome Round Fixture

Flush Mount Ceiling Light

DIMENSIONS

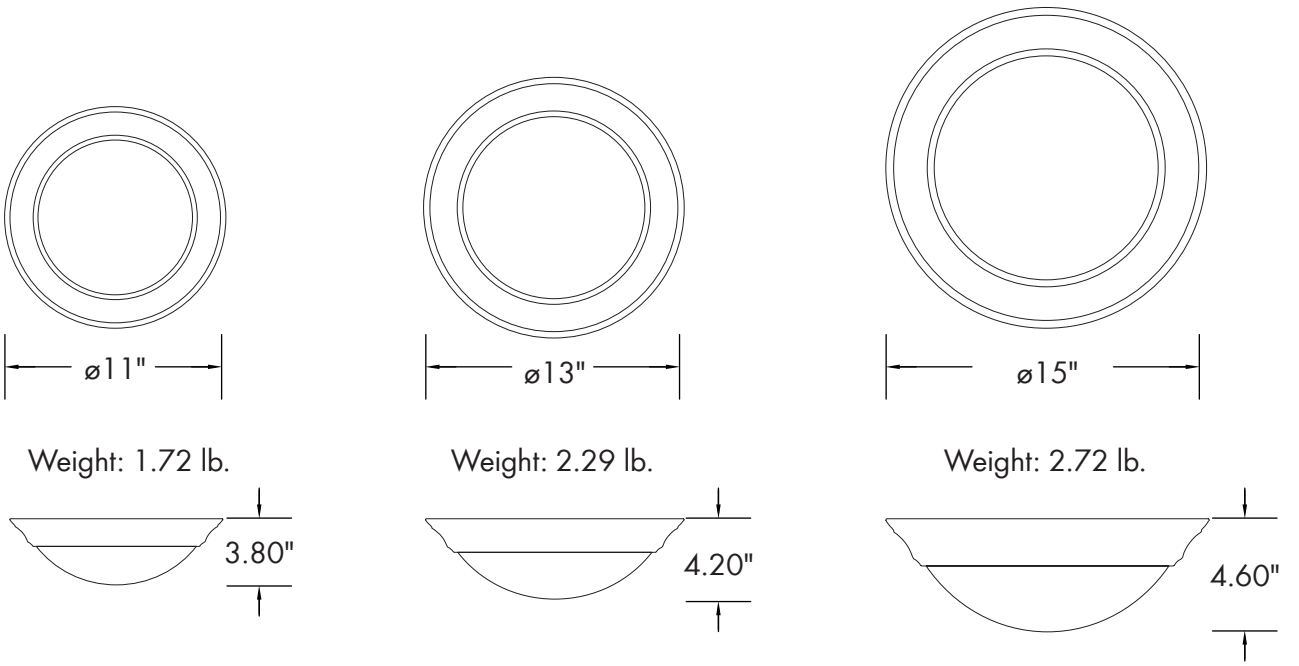

LUMEN OUTPUT

SKU	Size (in)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
GSMF-1114-C-XX	ø11	14	840	60
GSMF-1315-C-XX	ø13	15	900	60
GSMF-1525-C-XX	ø15	25	1500	60