


Date:	
Project Name:	
SKU #:	

ICON R4™
Icon Series Round Downlight 4"



APPLICATIONS
Residential, Commercial, Multi-Family

FEATURES

- | | |
|--|---|
| <p>Construction</p> <ul style="list-style-type: none"> - Aluminum Housing | <p>Finish</p> <ul style="list-style-type: none"> - White Trim - Black Trim [Option] |
| <p>Electrical & Technical</p> <ul style="list-style-type: none"> - Input Voltage: 120VAC
120-277VAC [Option] - Input Frequency: 60Hz - Projected Life: L70 > 50,000 hrs - PF: >0.9 - CRI: >90 - THD: <20% - CCT Selectable: 2700K/3000K/3500K/
4000K/5000K - Dim to Warm: 3000K-1800K [Option] - Operating Temp.: -4°F ~ 104°F - Wet Location Rated - IC Rated/Airtight Rated - 25W Emergency Battery Backup [Option] | <p>Optical</p> <ul style="list-style-type: none"> - White PC Lens - Available Beam Angles: 24° Narrow 38° Medium 60° Wide |
| <p>Controls</p> <ul style="list-style-type: none"> - Triac Dimming [120V] - Dual Mode: 0-10V Dimming [120-277V] +
Triac Dimming [120V] | <p>Installation/Mounting</p> <ul style="list-style-type: none"> - Spring Clip Mount [W/Trim]:
Ceiling Cutout: Ø3 3/4" - Flush to Ceiling [Trimless]:
Ceiling Cutout: Ø3 3/4" |
| <p>Dimmer Compatibility List:</p> <ul style="list-style-type: none"> - See Page 4 | <p>Compliance</p> <ul style="list-style-type: none"> - JA8 TITLE 24 Compliant |
| <p>Lumen Output</p> <ul style="list-style-type: none"> - See Page 3 | <p>Warranty</p> <ul style="list-style-type: none"> - 5 Year Warranty - See warranty documentation for more information. |






ORDERING INFORMATION **EXAMPLE: ICON-R-4-15-5C-38-RTM-WH**

Series	Size	Wattage	CCT	Input Voltage	Beam Angle	Trim Type	Trim Finish
ICON-R	4 - 4"	15 - 15W 18 - 18W	5C - 2700K/3000K/ 3500K/4000K/ 5000K	[Blank] - 120VAC U - 120-277VAC	24 - 24° 38 - 38° 60 - 60°	RTM - Round Trim RTL - Round Trimless RST - Round Slope Trim	BK - Black WH - White
		15 - 15W	DW - Dim to Warm (3000K-1800K)	T - 120VAC			

- Accessories**
- ICON-SR-2-4-NCH [New Construction Plate W/ Hanger Bar]
 - FLEX-6 [6' Flexible Connector]
 - FLEX-10 [10' Flexible Connector]
 - FLEX-20 [20' Flexible Connector]
 - EM [25W Emergency Battery Backup]

DIMENSIONS

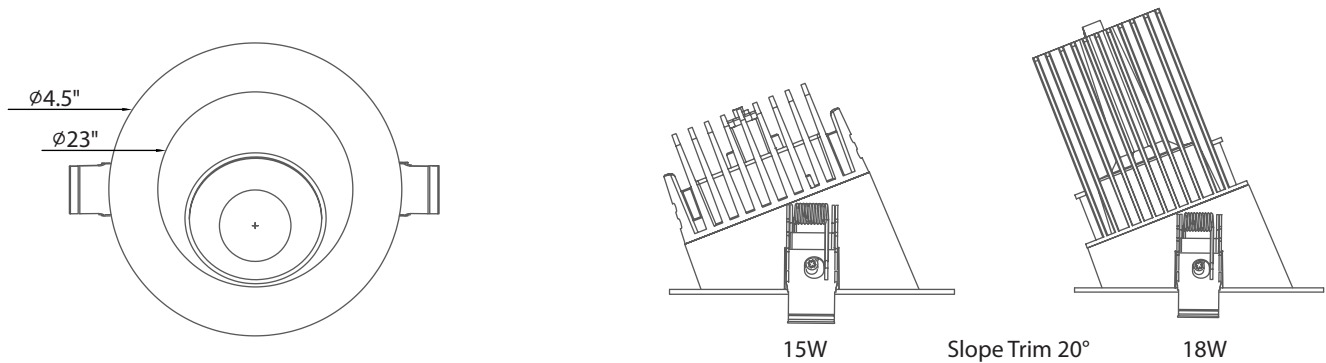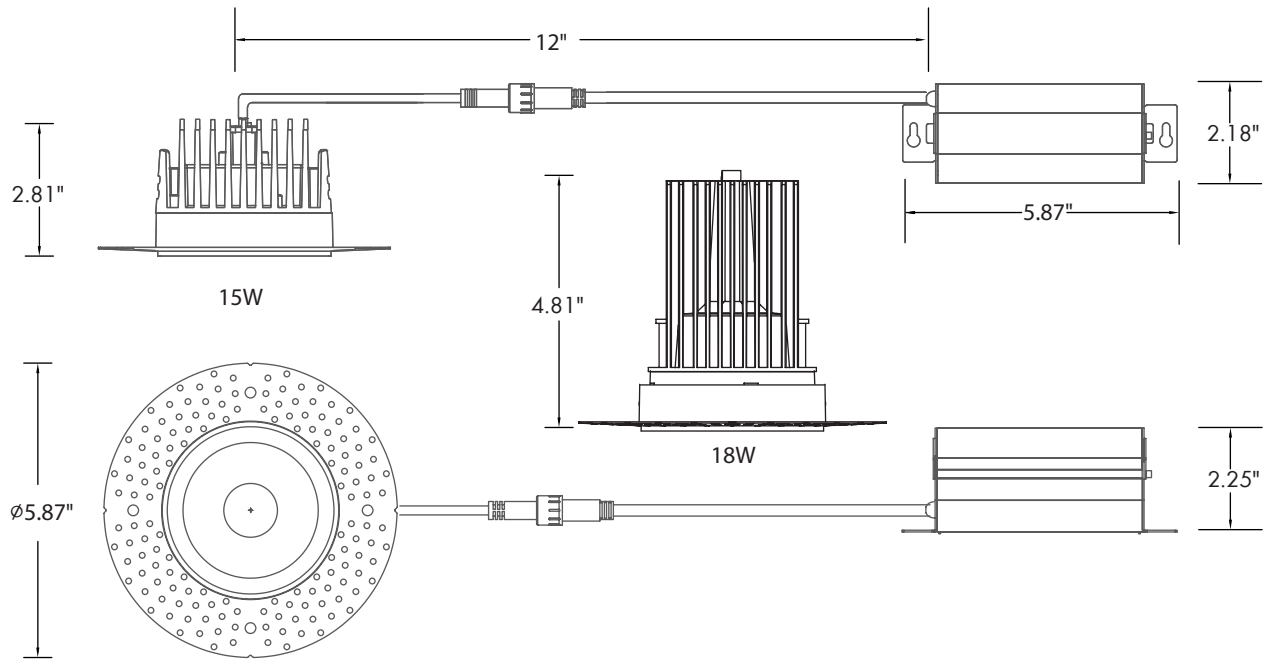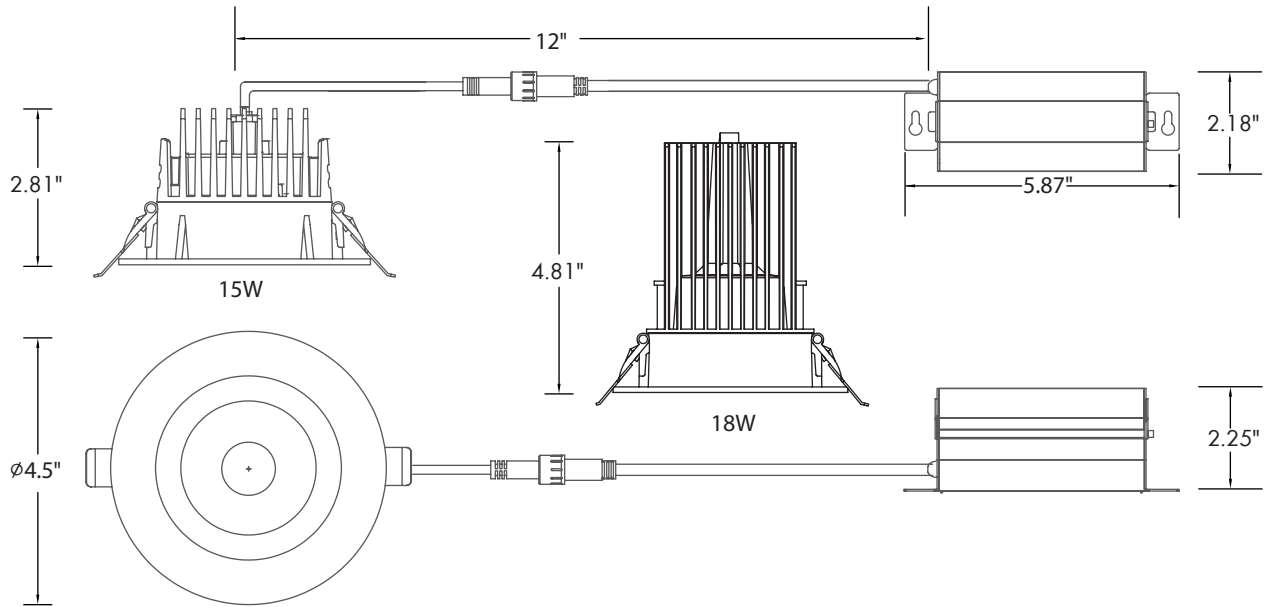


LUMEN OUTPUT

SKU	Size (in)	Wattage (W)	Beam Angle	2700K		3000K		3500K		4000K		5000K	
				Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)
ICON-R-4-15-5C-24-RTM-WH	4	15	24°	1155	87	1228	94	1287	101	1320	102	1279	94
ICON-R-4-15-5C-38-RTM-WH	4	15	38°	1013	68	993	66	1092	73	1144	76	1154	77
ICON-R-4-15-5C-60-RTM-WH	4	15	60°	1153	87	1208	93	1263	100	1321	103	1251	93
ICON-R-4-18-5C-24-RTM-WH	4	18	24°	1803	102	1840	106	1906	113	1932	113	1911	109
ICON-R-4-18-5C-38-RTM-WH	4	18	38°	1282	71	1486	83	1479	82	1577	88	1634	91
ICON-R-4-18-5C-60-RTM-WH	4	18	60°	1816	104	1867	108	1943	115	1973	115	1954	112

Dim to Warm				3000K	
SKU	Size (in)	Wattage (W)	Beam Angle	Delivered Lumens (lm)	Efficacy (lm/W)
ICON-R-4-15-DW-T-24-RTM-WH	4	15	24°	958	74
ICON-R-4-15-DW-T-38-RTM-WH	4	15	38°	959	74
ICON-R-4-15-DW-T-60-RTM-WH	4	15	60°	949	73

ACCESSORIES



Round Trim
[RTM]



Round Slope Trim
[RST]



Round Trimless
[RTL]



New Construction Plate
[For Trim & Trimless]
[ICON-SR-2-4-NCH]




6'/10'/20'
Flexible Extension Connector
[FLEX-4]
[FLEX-6]
[FLEX-10]
[FLEX-20]



25W
Emergency Battery Backup
[EM]

COMPLETED PRODUCT

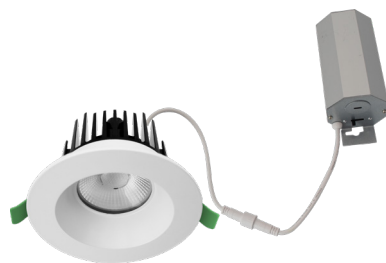

ICON R4™
Round Trim



ICON R4™
Round Slope Trim



ICON R4™
Round Trimless

DIMMER COMPATABILITY LIST

TRIAC Dimming:

Leviton: 6672, 6674, IPL06

Lutron: LECL-153P, CTCL-150H, LGCL-153PLH, CTCL-153P, SCL-153P, S-600P, PD-6WCL, PD-5NE, PD-10NXD, DVCL-153P, TGCL-153P, AYCL-153P, MACL-153M

Eaton: AAL06

Pass & Seymour: DCL453PTCCCV6

GE: 10464, 18027

0-10V Dimming:

Leviton: Illumitech - IP7

Lutron: Diva - DDTV, Diva - NDTV, Nova T - NTDTV

Watt Stopper: DCLV1

Lightolier Controls: ZP600FAM120

Philips: Sunrise - SR1200ZTUNV