

Date:	
Project Name:	
SKU #:	

ICON R4™

Icon Series Round Downlight 4"

**APPLICATIONS**

Residential, Commercial, Multi-Family

FEATURES**Construction**

- Aluminum Housing

Finish

- White Trim
- Black Trim [Option]

Electrical & Technical

- Input Voltage: 120VAC
120-277VAC [Option]
- Input Frequency: 60Hz
- Projected Life: L70 > 50,000 hrs
- PF: >0.9
- CRI: >90
- THD: <20%
- CCT Selectable: 2700K/3000K/3500K/
4000K/5000K
- Operating Temp.: -4°F ~ 104°F
- Wet Location Rated
- IC Air-Tight Rated
- 8W Emergency Battery Backup [Option]

Optical

- White PC Lens
- Available Beam Angles:

24° Narrow

38° Medium

60° Wide

Installation/Mounting

- Spring Clip Mount [W/Trim]
- Flush to Ceiling [Trimless]

Controls

- Triac Dimming [120V]
- 0-10V Dimming [120-277V]

Compliance


- JA8 TITLE 24 Compliant

Lumen Output

- 4"/15W: 1000lm
- 4"/18W: 1500lm

Warranty


- 5 Year Warranty
- See warranty documentation for more information.



RTM - Round Trim







RTL - Round Trimless

**ORDERING INFORMATION****EXAMPLE: ICON-R-4-15-5C-38-RTM-WH**

Series	Size	Wattage	CCT	Input Voltage	Beam Angle	Trim Type	Trim Finish	Options
ICON-R	4 - 4"	15 - 15W 18 - 18W	5C - 2700K/3000K/ 3500K/4000K/ 5000K	[Blank] - 120VAC U - 120-277VAC	24 - 24° 38 - 38° 60 - 60°	RTM - Round Trim RTL - Round Trimless	BK - Black WH - White	ICON-R-NC [New Construction Plate W/ Hanger Bar] FLEX-6 [6' Flexible Connector] FLEX-10 [10' Flexible Connector] FLEX-20 [20' Flexible Connector] EM [Emergency Battery Backup]


DIMENSIONS

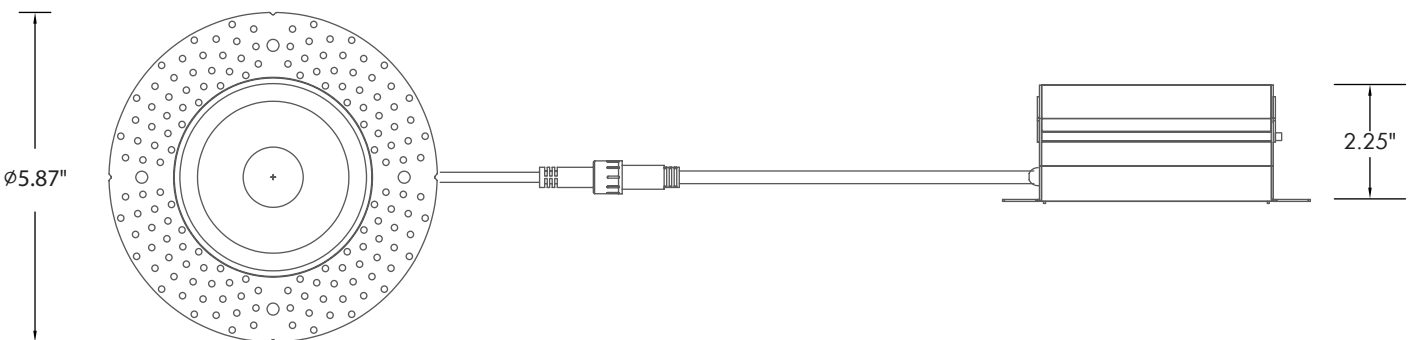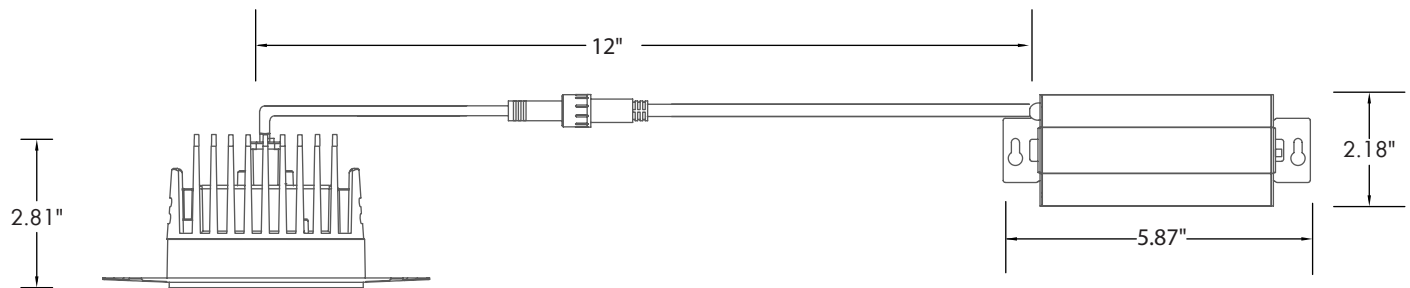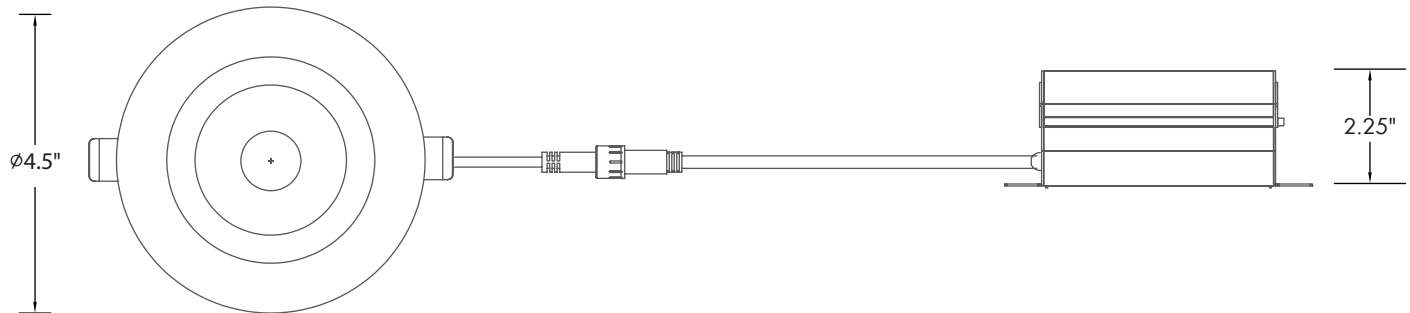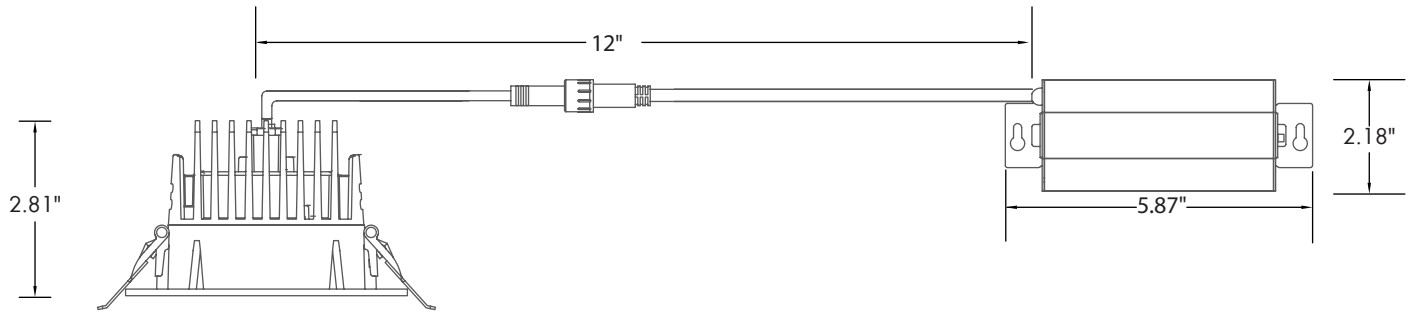

LUMEN OUTPUT

SKU	Size (in)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
ICON-R-4-15-5C-38-RTM-WH	4	15	1000	66
ICON-R-4-18-5C-38-RTM-WH	4	18	1500	83

ACCESSORIES



Round Trim
[RTM]



Round Trimless
[RTL]



6'/10'/20'
Flexible Extension Connector
[FLEX-4]
[FLEX-6]
[FLEX-10]
[FLEX-20]




New Construction Kit
W/ Hanger Bar
2"/3"/3.5"/4"
[ICON-R-NC]



8W
Emergency Battery Backup
[EM]

COMPLETED PRODUCT

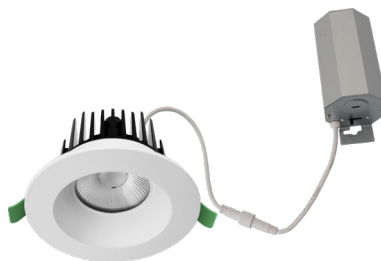

ICON R4™
Round Trim



ICON R4™
Round Trimless