

Date:	
Project Name:	
SKU #:	

HELIX™ S
Flush Mounted Square Fixture




APPLICATIONS

Residential, Commercial, Multi-Family Complex, Hospitality

FEATURES

- | | |
|--|---|
| <p>Construction</p> <ul style="list-style-type: none"> - Die-cast Aluminum Base - Spun Aluminum Body | <p>Optical</p> <ul style="list-style-type: none"> - Beam Angles: <ul style="list-style-type: none"> • 15° • 30° • 45° |
| <p>Electrical & Technical</p> <ul style="list-style-type: none"> - Input Voltage: 100-277V - Input Frequency: 50/60Hz - Projected Life: L70 > 50,000 hrs - PF: >0.9 - CRI: >90 - THD: <20% - CCT: 2700K, 3000K, 4000K, 5000K - Operating Temp.: -40°F ~ 122°F - Dry Location | <p>Installation/Mounting</p> <ul style="list-style-type: none"> - Pendant Mount: <ul style="list-style-type: none"> • 3.3' Cable [Standard] • 3.3' Stem [Standard] [Custom Length*] - Surface Mount |
| <p>Controls</p> <ul style="list-style-type: none"> - Triac Dimming [Option] - 0-10 Dimming [Option] | <p>Warranty</p> <ul style="list-style-type: none"> - 5 Year Warranty See warranty documentation for more information. |
| <p>Lumen Output</p> <ul style="list-style-type: none"> • 15W: 1,200lm • 20W: 1,600lm • 30W: 2,400lm | |

HOUSING FINISHES



REFLECTOR FINISHES






ORDERING INFORMATION **EXAMPLE: HXS-0305-15-30-15-D-BK-WH-CM**



Series	Size	Wattage	CCT	Beam Angle	Dimming	Finish	Reflector	Mounting Option
HXS	0305 - L: 3" x W: 3" x H: 5"	15 - 15W	27 - 2700K	15 - 15°	D - Triac Dimming D1 - 0-10V Dimming	BK - Black WH - White	BK - Black WH - White SV - Silver	CM - Cable Mount [3.3'] ST - Stem Mount [3.3'] SM - Surface Mount
	0306 - L: 3" x W: 3" x H: 6"	20 - 20W	30 - 3000K	30 - 30°				
	0406 - L: 4" x W: 4" x H: 6"	30 - 30W	35 - 3500K 40 - 4000K	45 - 45°				

DIMENSIONS

Pendant Mount

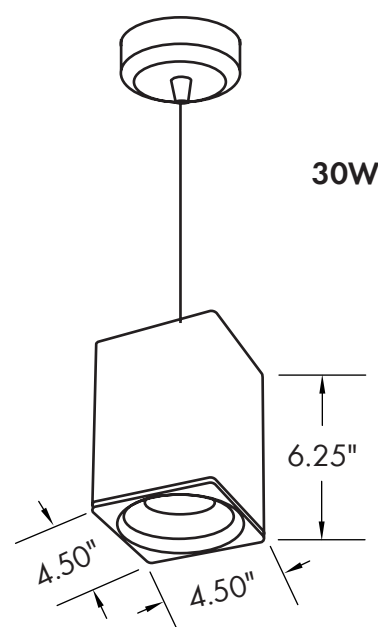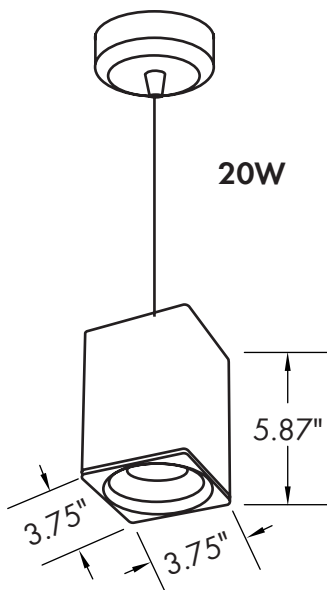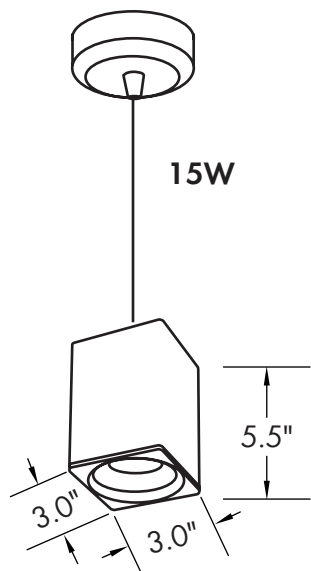

Surface Mount

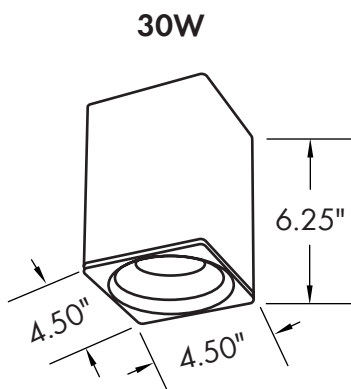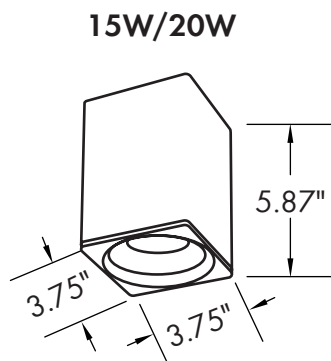

LUMEN OUTPUT

SKU	Size [LxWxH] (in)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
HXS-0305-15-30-15-D-BK-WH-XX	3 x 3 x 5.5	15	1200	80
HXS-0306-20-30-15-D-BK-WH-XX	3.75 x 3.75 x 5.8	20	1600	70
HXS-0406-30-30-15-D-BK-WH-XX	4.5 x 4.5 x 6	30	2400	80