


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.3V I:0.1600A P:18.90W PF:0.9900 Lamp Flux:2497.17x1 lm					
NAME: 二代线条灯			TYPE:下发光 白色外壳		WEIGHT:
DIM.: 2FT			SPEC.:3500K		SERIAL No.:YQ2107-7
MFR.: YQ			SUR.:0.171*1.13m		PROTECTION ANGLE:

DATA OF LAMP			PHOTOMETRIC DATA Eff: 132.13 lm/W		
MODEL		I _{max} (cd)	879.3	S/MH(C0/180)	1.22
NOMINAL POWER(W)	18	LOR(%)	100.0	S/MH(C90/270)	1.30
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	2497.2	η UP,DN(C0-180)	1.0,51.6
NOMINAL FLUX(lm)	2497.17	CIE CLASS	DIRECT	η UP,DN(C180-360)	1.0,46.3
LAMPS INSIDE	1	η up(%)	2.1	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	119.3	η down(%)	97.9	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

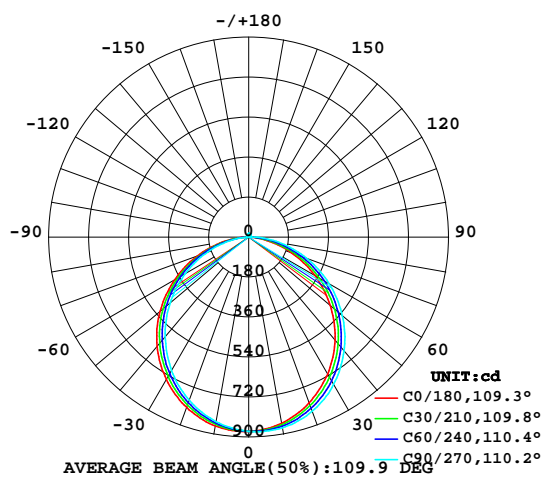

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

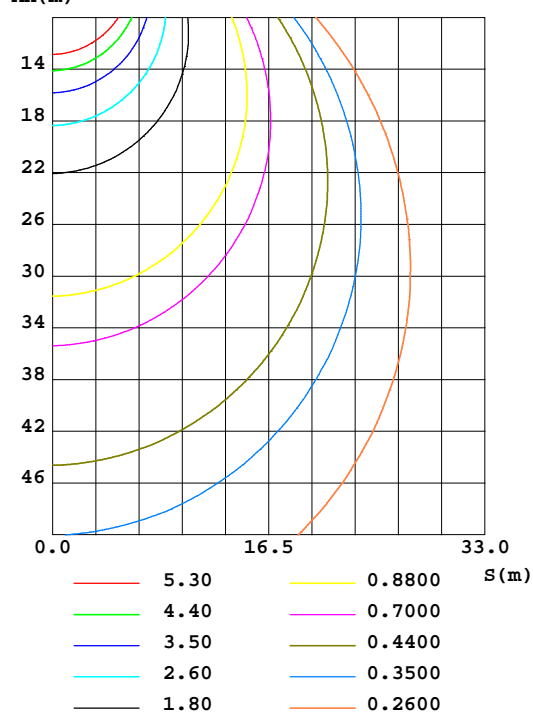


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-08-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: 聚鑫德源 AI40D2C-421000
源磊A+ 13S5P/13S10P
E款 0:10

ZONAL FLUX DIAGRAM
AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum,lamp
10	851.9	861.3	871.9	874.0	863.6	853.5	844.2	840.6	0- 10	82.66	82.66	3.31,3.31
20	794.4	813.7	834.5	838.7	816.5	799.4	782.4	776.2	10- 20	235.8	318.5	12.8,12.8
30	711.8	738.0	766.0	771.7	740.8	718.3	694.3	686.6	20- 30	355.2	673.7	27,27
40	605.9	636.0	668.3	677.2	641.6	614.4	585.3	576.9	30- 40	425.0	1099	44,44
50	479.5	515.2	550.5	561.7	520.8	494.3	462.0	451.3	40- 50	437.6	1536	61.5,61.5
60	342.7	379.9	417.3	427.8	385.6	360.9	329.6	315.9	50- 60	392.0	1928	77.2,77.2
70	203.6	237.5	276.8	285.9	244.9	222.4	196.1	178.7	60- 70	297.4	2226	89.1,89.1
80	72.57	101.1	138.3	144.3	106.8	90.69	72.62	53.58	70- 80	171.9	2398	96,96
90	1.823	3.950	17.16	23.07	5.473	2.891	2.114	2.280	80- 90	48.14	2446	97.9,97.9
100	3.735	3.367	2.968	2.705	2.852	3.465	4.241	4.256	90-100	3.518	2449	98.1,98.1
110	6.151	5.616	5.295	4.800	4.948	5.661	6.838	6.594	100-110	4.807	2454	98.3,98.3
120	8.565	7.931	7.828	7.085	7.234	7.872	9.194	8.788	110-120	6.816	2461	98.6,98.6
130	10.56	9.955	10.13	9.147	9.252	9.778	11.15	10.60	120-130	8.095	2469	98.9,98.9
140	12.07	11.67	12.00	10.88	10.85	11.29	12.61	12.02	130-140	8.375	2477	99.2,99.2
150	13.23	13.18	13.41	12.37	12.19	12.62	13.72	13.27	140-150	7.704	2485	99.5,99.5
160	14.49	14.62	14.60	13.68	13.76	14.02	14.89	14.58	150-160	6.280	2491	99.8,99.8
170	16.03	15.86	15.73	15.07	15.70	15.45	16.03	15.69	160-170	4.222	2496	99.9,99.9
180	17.29	16.56	16.69	16.33	17.29	16.57	16.68	16.32	170-180	1.532	2497	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

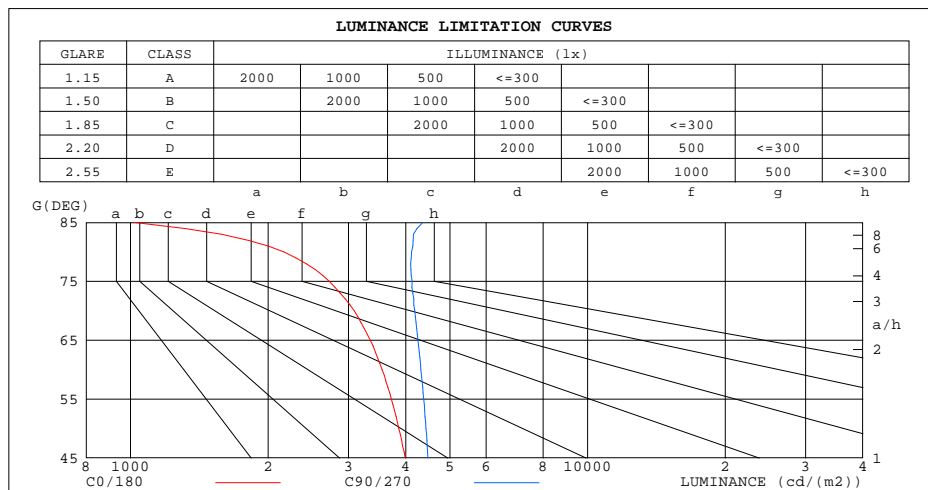


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: 聚鑫德源 AI40D2C-421000
源磊A+ 13S5P/13S10P
E款 0:10

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.3V I:0.1600A P:18.90W PF:0.9900 Lamp Flux:2497.17x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:3500K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	.98
1.0	1.03	.99	.95	1.01	.97	.94	.96	.93	.90	.92	.89	.87	.88	.86	.84	.82
2.0	.90	.83	.78	.88	.82	.76	.84	.79	.74	.81	.76	.72	.77	.74	.70	.68
3.0	.79	.71	.64	.77	.70	.64	.74	.68	.62	.71	.66	.61	.68	.64	.60	.57
4.0	.70	.61	.55	.69	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.63	.54	.47	.61	.53	.47	.59	.52	.46	.57	.50	.45	.55	.49	.45	.42
6.0	.56	.47	.41	.55	.47	.41	.53	.46	.40	.51	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.36	.47	.40	.35	.45	.39	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.44	.37	.32	.43	.36	.31	.42	.36	.31	.29
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.28	.38	.32	.28	.26
10.0	.39	.32	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

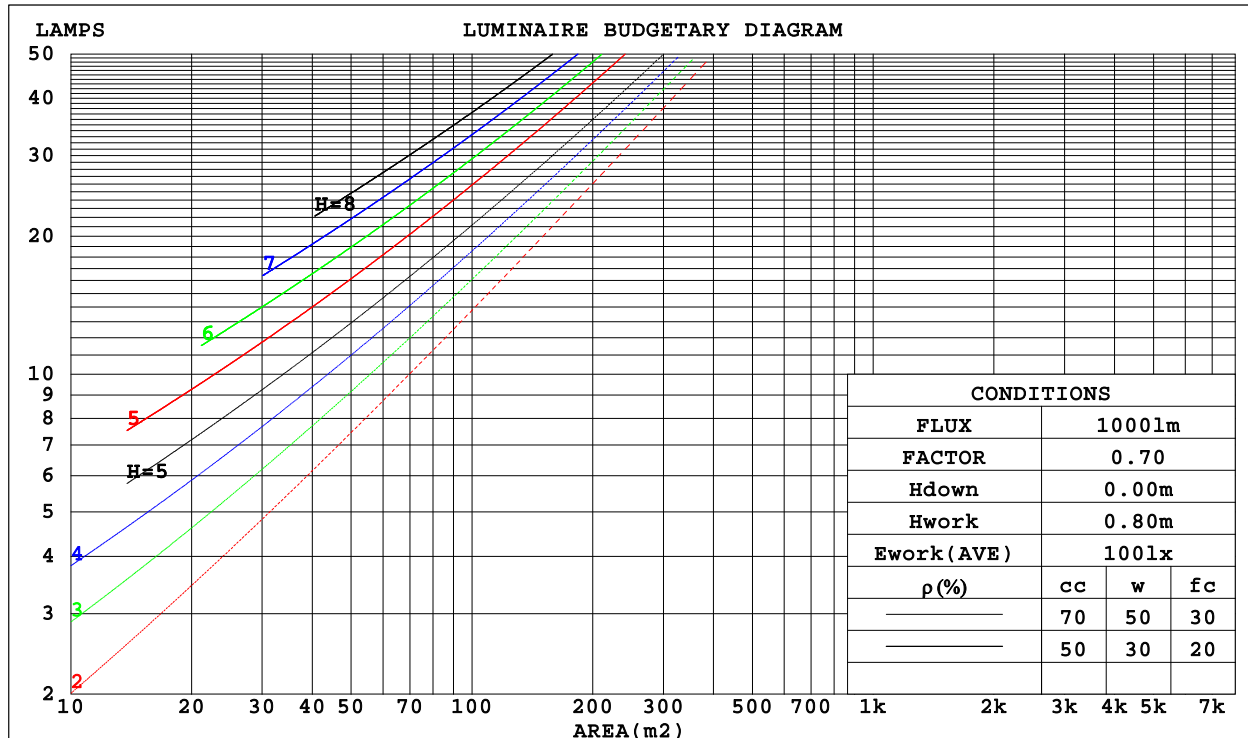

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 26.3DEG
 Operators: Ethan
 Test Date: 2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity: 36%
 Test Distance: 6.770m [K=1.0000]
 Remarks: 聚鑫德源 AI40D2C-421000
 源磊A+ 13S5P/13S10P
 E款 0:10

WEC AND CCEC

Test:U:119.3V I:0.1600A P:18.90W PF:0.9900 Lamp Flux:2497.17x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:3500K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.309	.176	.056	.301	.172	.055	.287	.165	.053	.274	.158	.051	.261	.151	.049	
2.0	.290	.159	.049	.283	.156	.048	.271	.151	.047	.259	.145	.045	.248	.140	.044	
3.0	.269	.143	.043	.262	.141	.042	.251	.136	.041	.241	.132	.040	.231	.128	.040	
4.0	.248	.129	.038	.242	.127	.037	.232	.123	.037	.223	.120	.036	.214	.116	.035	
5.0	.229	.117	.034	.224	.115	.034	.215	.112	.033	.207	.109	.032	.199	.106	.032	
6.0	.212	.107	.030	.208	.105	.030	.200	.103	.030	.193	.100	.029	.186	.098	.029	
7.0	.198	.098	.028	.194	.097	.028	.187	.094	.027	.180	.092	.027	.174	.090	.027	
8.0	.185	.090	.025	.181	.089	.025	.175	.087	.025	.169	.085	.025	.163	.084	.024	
9.0	.173	.084	.023	.170	.083	.023	.164	.081	.023	.159	.080	.023	.153	.078	.023	
10.0	.163	.078	.022	.160	.077	.022	.155	.076	.021	.150	.074	.021	.145	.073	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.206	.206	.206	.176	.176	.176	.120	.120	.120	.069	.069	.069	.022	.022	.022	
1.0	.196	.172	.150	.168	.148	.129	.115	.102	.089	.066	.059	.052	.021	.019	.017	
2.0	.188	.148	.114	.161	.127	.099	.110	.088	.069	.064	.051	.040	.020	.017	.013	
3.0	.180	.130	.090	.154	.112	.078	.106	.078	.055	.061	.046	.032	.020	.015	.011	
4.0	.173	.117	.075	.148	.101	.065	.102	.070	.046	.059	.041	.027	.019	.013	.009	
5.0	.165	.107	.063	.142	.092	.055	.098	.064	.039	.057	.038	.023	.018	.012	.008	
6.0	.158	.098	.055	.136	.085	.048	.094	.060	.034	.054	.035	.020	.018	.011	.007	
7.0	.151	.091	.050	.130	.079	.043	.090	.056	.031	.052	.033	.018	.017	.011	.006	
8.0	.145	.086	.045	.125	.074	.039	.086	.052	.028	.050	.031	.017	.016	.010	.005	
9.0	.139	.081	.042	.120	.070	.036	.083	.049	.026	.048	.029	.015	.016	.010	.005	
10.0	.133	.076	.039	.115	.066	.034	.080	.047	.024	.046	.028	.014	.015	.009	.005	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: 聚鑫德源 AI40D2C-421000
 源磊A+ 13S5P/13S10P
 E款 0:10

Uncorrected UGR Table

Test:U:119.3V I:0.1600A P:18.90W PF:0.9900 Lamp Flux:2497.17x1 lm											
NAME: 二代线条灯					TYPE:下发光 白色外壳			WEIGHT:			
DIM.: 2FT					SPEC.:3500K			SERIAL No.:YQ2107-7			
MFR.: YQ					SUR.:0.171*1.13m			PROTECTION ANGLE:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.3	18.8	17.6	19.1	19.3	18.0	19.5	18.3	19.7	20.0	
	3H	18.7	20.1	19.0	20.3	20.6	19.7	21.1	20.0	21.3	
	4H	19.2	20.5	19.5	20.8	21.1	20.4	21.7	20.8	22.0	
	6H	19.5	20.7	19.9	21.0	21.4	21.0	22.3	21.4	22.6	
	8H	19.5	20.7	19.9	21.1	21.4	21.3	22.5	21.6	22.8	
	12H	19.5	20.7	19.9	21.0	21.4	21.5	22.6	21.8	22.9	
4H	2H	18.0	19.3	18.4	19.6	19.9	18.5	19.9	18.9	20.1	
	3H	19.6	20.7	19.9	21.0	21.4	20.4	21.5	20.8	21.9	
	4H	20.2	21.2	20.6	21.6	22.0	21.3	22.3	21.7	22.7	
	6H	20.6	21.5	21.0	21.9	22.3	22.0	22.9	22.4	23.3	
	8H	20.7	21.6	21.1	22.0	22.4	22.3	23.2	22.8	23.6	
	12H	20.7	21.5	21.2	21.9	22.4	22.6	23.4	23.0	23.8	
8H	4H	20.5	21.4	21.0	21.8	22.2	21.5	22.3	21.9	22.7	
	6H	21.1	21.8	21.5	22.2	22.7	22.4	23.1	22.8	23.5	
	8H	21.2	21.9	21.7	22.3	22.8	22.8	23.4	23.3	23.9	
	12H	21.3	21.8	21.8	22.3	22.8	23.1	23.7	23.6	24.2	
12H	4H	20.5	21.3	21.0	21.8	22.2	21.5	22.3	21.9	22.7	
	6H	21.2	21.8	21.6	22.3	22.7	22.4	23.0	22.9	23.5	
	8H	21.4	21.9	21.9	22.4	22.9	22.8	23.4	23.3	23.9	
Variations with the observer position at spacings:											
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.4					+ 0.1 / - 0.2					
2.0H	+ 0.2 / - 0.4					+ 0.2 / - 0.3					

CIE Pub.117 Corrected 2497 lm Total Lamp Luminous Flux.(8log(F/F0) = 3.2)

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: 聚鑫德源 AI40D2C-421000
 源磊A+ 13S5P/13S10P
 E款 0:10

UTILIZATION FACTORS TABLE

Test:U:119.3V I:0.1600A P:18.90W PF:0.9900 Lamp Flux:2497.17x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:3500K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	46	39	56	45	38	55	45	38	32
0.80	67	56	48	66	55	48	64	54	47	40
1.00	75	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	64	78	70	63	56
1.50	88	78	71	86	77	70	82	75	69	61
2.00	94	86	79	92	84	78	89	82	77	68
2.50	98	90	84	96	89	83	92	86	81	73
3.00	102	95	89	99	93	88	95	90	86	77
4.00	106	100	95	103	98	94	99	94	91	81
5.00	108	103	99	105	101	97	101	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: 聚鑫德源 AI40D2C-421000
 源磊A+ 13S5P/13S10P
 E款 0:10

ISOCANDELA DIAGRAM

Test:U:119.3V I:0.1600A P:18.90W PF:0.9900 Lamp Flux:2497.17x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:3500K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

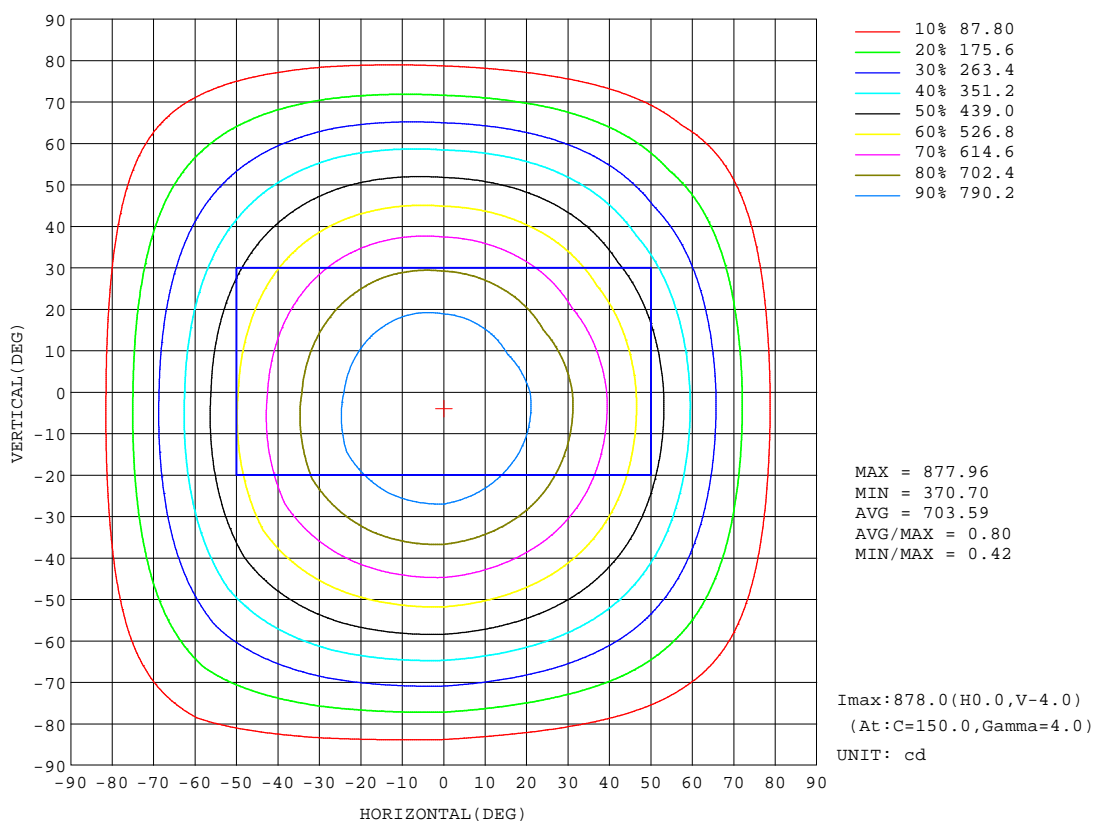


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: 聚鑫德源 AI40D2C-421000
源磊A+ 13S5P/13S10P
E款 0:10

AAI Figure

Test:U:119.3V I:0.1600A P:18.90W PF:0.9900 Lamp Flux:2497.17x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:3500K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

Flux out:1741 lm

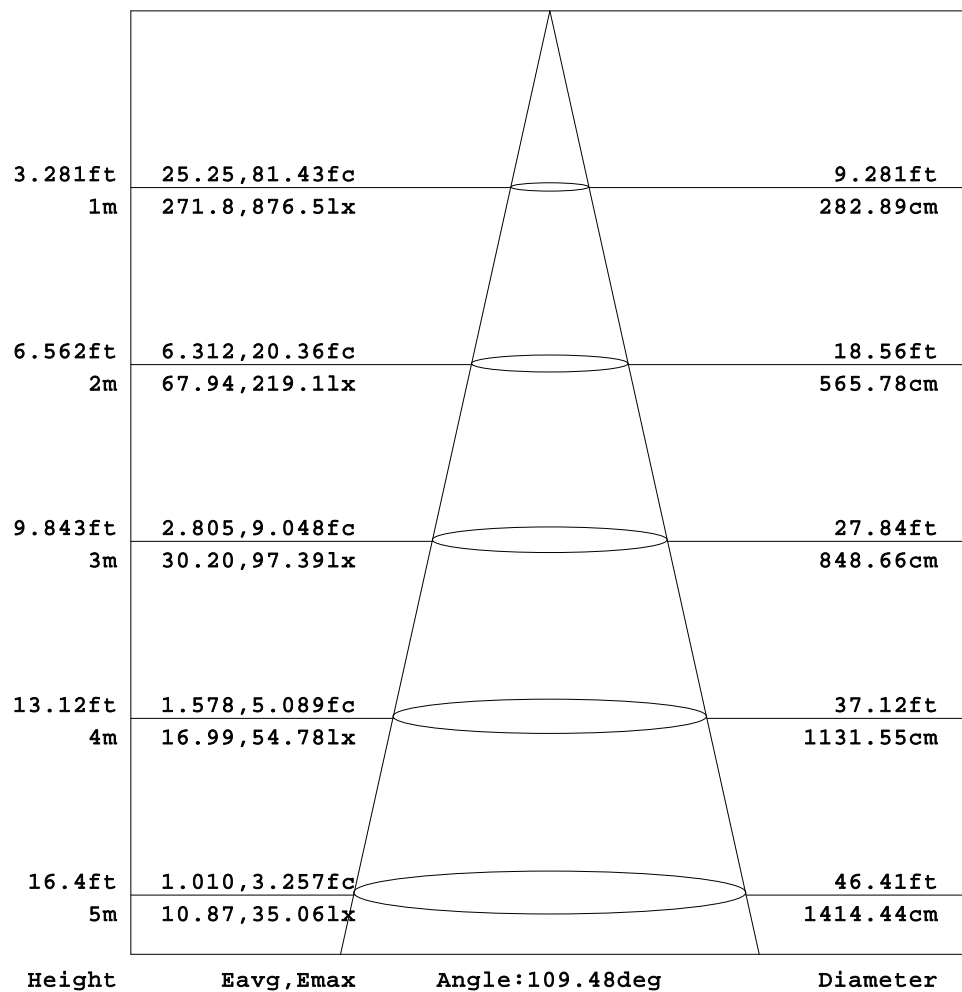


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-08-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: 聚鑫德源 AI40D2C-421000
源磊A+ 13S5P/13S10P
E款 0:10

ISOLUX DIAGRAM


Test:U:119.3V I:0.1600A P:18.90W PF:0.9900 Lamp Flux:2497.17x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:3500K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

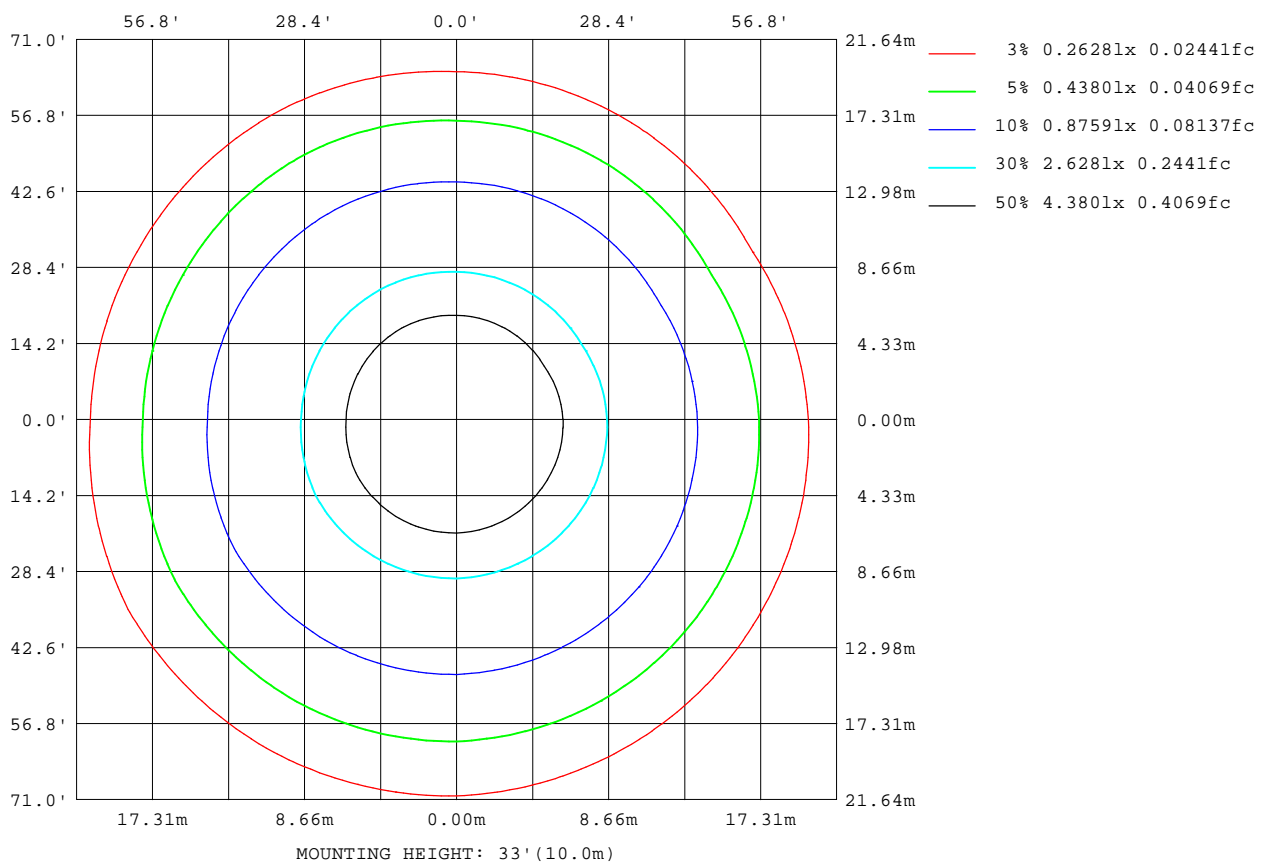

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: 聚鑫德源 AI40D2C-421000
源磊A+ 13S5P/13S10P
E款 0:10

Planar Illuminance Curve

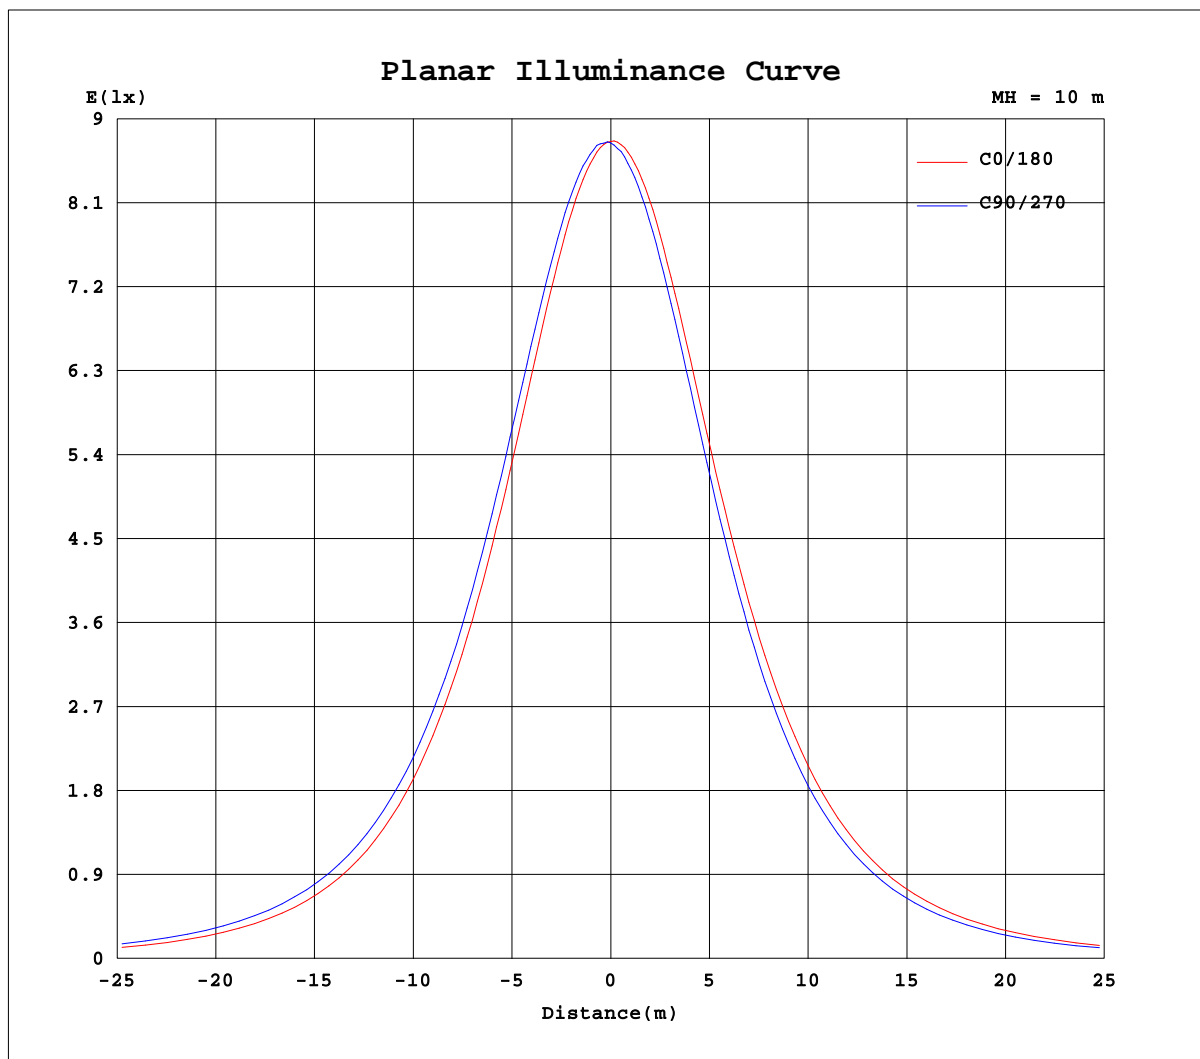

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: 聚鑫德源 AI40D2C-421000
源磊 A+ 13S5P/13S10P
E款 0:10

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.3V I:0.1600A P:18.90W PF:0.9900 Lamp Flux:2497.17x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:3500K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

Table--1

UNIT: cd

C(DEC) γ (DEC)	0	30	60	90	120	150	180	210	240	270	300	330						
0	875	875	875	875	875	875	875	875	875	875	875	875						
5	867	870	873	877	878	879	873	870	867	863	862	862						
10	852	858	864	872	874	874	864	856	851	844	841	840						
15	826	836	847	857	860	860	844	835	826	816	813	812						
20	794	807	820	834	839	839	817	805	794	782	777	775						
25	756	771	787	805	809	808	782	768	756	741	736	733						
30	712	729	747	766	772	771	741	726	711	694	688	685						
35	661	680	699	720	726	727	694	677	661	641	635	632						
40	606	626	646	668	676	678	642	623	606	585	578	576						
45	544	569	588	611	620	623	584	566	547	525	518	515						
50	479	504	526	551	559	564	521	503	485	462	455	448						
55	412	436	461	485	495	498	454	436	420	396	389	379						
60	343	366	393	417	427	429	386	368	354	330	322	310						
65	273	295	322	347	358	358	315	298	285	263	253	241						
70	204	225	250	277	286	286	245	228	217	196	185	172						
75	136	156	180	207	214	214	175	160	150	132	120	107						
80	72.6	89.5	113	138	144	144	107	95.1	86.3	72.6	59.4	47.7						
85	17.1	30.8	52.7	73.5	79.2	78.6	45.3	36.1	31.2	19.5	10.7	5.09						
90	1.82	2.69	5.21	17.2	25.3	20.8	5.47	3.86	1.92	2.11	2.32	2.24						
95	2.69	2.50	2.34	2.03	1.96	1.80	1.97	2.31	2.73	3.09	3.22	3.16						
100	3.73	3.47	3.26	2.97	2.78	2.63	2.85	3.22	3.71	4.24	4.30	4.21						
105	4.90	4.57	4.32	4.08	3.79	3.62	3.85	4.25	4.79	5.50	5.45	5.35						
110	6.15	5.75	5.48	5.29	4.89	4.71	4.95	5.38	5.95	6.84	6.64	6.55						
115	7.38	6.95	6.65	6.57	6.02	5.88	6.10	6.55	7.05	8.08	7.77	7.71						
120	8.57	8.07	7.79	7.83	7.16	7.01	7.23	7.65	8.10	9.19	8.81	8.76						
125	9.61	9.12	8.84	9.04	8.22	8.10	8.30	8.65	9.09	10.2	9.80	9.70						
130	10.6	10.1	9.83	10.1	9.20	9.09	9.25	9.57	9.99	11.2	10.7	10.5						
135	11.4	11.0	10.7	11.1	10.1	10.00	10.1	10.4	10.8	11.9	11.5	11.2						
140	12.1	11.7	11.6	12.0	11.0	10.8	10.9	11.1	11.5	12.6	12.2	11.9						
145	12.7	12.4	12.5	12.8	11.8	11.5	11.5	11.7	12.2	13.2	12.8	12.5						
150	13.2	13.1	13.2	13.4	12.6	12.2	12.2	12.3	12.9	13.7	13.4	13.2						
155	13.8	13.9	13.9	14.0	13.3	12.7	12.9	12.9	13.6	14.3	14.0	13.9						
160	14.5	14.7	14.6	14.6	14.0	13.4	13.8	13.7	14.4	14.9	14.6	14.6						
165	15.3	15.4	15.2	15.2	14.7	14.1	14.7	14.4	15.0	15.5	15.0	15.2						
170	16.0	16.0	15.7	15.7	15.4	14.8	15.7	15.3	15.6	16.0	15.6	15.8						
175	16.9	16.5	16.1	16.3	16.0	15.6	16.7	16.1	16.2	16.5	16.1	16.2						
180	17.3	16.7	16.5	16.7	16.4	16.3	17.3	16.7	16.5	16.7	16.4	16.3						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-08-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: 聚鑫德源 AI40D2C-421000
源磊A+ 13S5P/13S10P
E款 0:10