


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.3V I:0.1640A P:19.30W PF:0.9890 Lamp Flux:2529.48x1 lm					
NAME: 二代线条灯			TYPE:下发光 白色外壳		WEIGHT:
DIM.: 2FT			SPEC.:4000K		SERIAL No.:YQ2107-7
MFR.: YQ			SUR.:0.171*1.13m		PROTECTION ANGLE:

DATA OF LAMP			PHOTOMETRIC DATA Eff: 131.06 lm/W		
MODEL		I _{max} (cd)	890.3	S/MH(C0/180)	1.22
NOMINAL POWER(W)	20	LOR(%)	100.0	S/MH(C90/270)	1.30
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	2529.5	η UP,DN(C0-180)	1.0,51.5
NOMINAL FLUX(lm)	2529.48	CIE CLASS	DIRECT	η UP,DN(C180-360)	1.0,46.4
LAMPS INSIDE	1	η up(%)	2.1	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	119.3	η down(%)	97.9	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

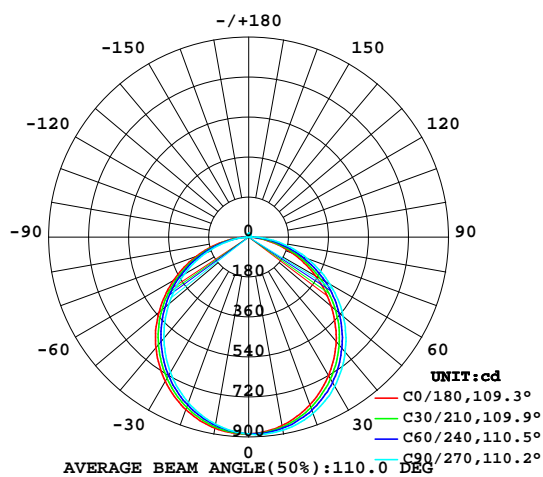

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

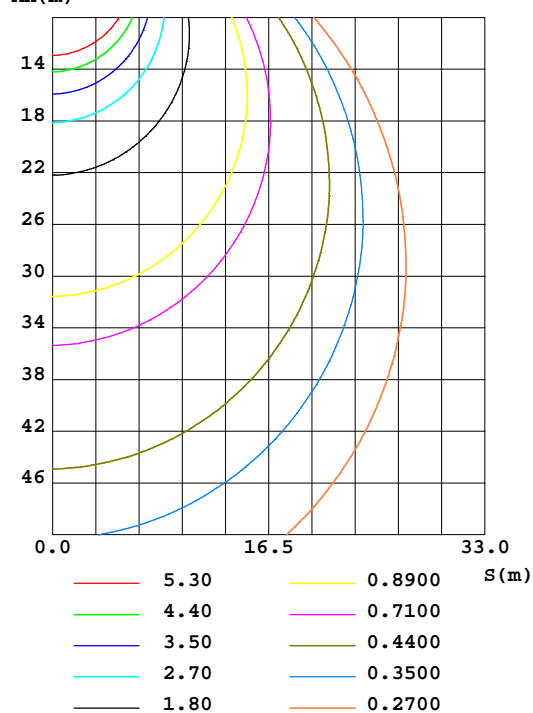


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: 聚鑫德源 AI40D2C-421000
 源磊A+ 13S5P/13S10P
 E款 0:10

ZONAL FLUX DIAGRAM AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum, lamp
10	861.9	871.5	882.5	884.3	873.0	863.9	855.4	851.7	0- 10	83.71	83.71	3.31,3.31
20	804.5	823.6	845.0	848.4	826.6	809.6	793.5	787.2	10- 20	238.8	322.5	12.8,12.8
30	720.3	746.2	775.3	781.2	750.9	728.0	704.7	696.1	20- 30	359.8	682.3	27,27
40	613.7	643.6	676.0	684.8	650.2	623.8	593.9	585.4	30- 40	430.5	1113	44,44
50	485.4	520.7	556.2	568.2	528.2	501.4	469.2	458.0	40- 50	443.3	1556	61.5,61.5
60	346.8	383.4	422.3	433.0	390.9	366.7	335.5	320.8	50- 60	397.2	1953	77.2,77.2
70	205.9	239.7	279.9	288.6	248.5	226.0	199.5	181.6	60- 70	301.4	2255	89.1,89.1
80	73.37	102.0	139.8	145.3	108.6	92.21	73.80	54.45	70- 80	174.0	2429	96,96
90	1.853	3.888	17.43	23.13	5.566	2.948	2.141	2.311	80- 90	48.71	2477	97.9,97.9
100	3.799	3.427	3.025	2.755	2.891	3.508	4.293	4.310	90-100	3.566	2481	98.1,98.1
110	6.243	5.718	5.395	4.890	5.022	5.731	6.921	6.684	100-110	4.882	2486	98.3,98.3
120	8.679	8.067	7.974	7.216	7.342	7.975	9.319	8.911	110-120	6.920	2493	98.5,98.5
130	10.73	10.12	10.31	9.305	9.388	9.908	11.30	10.75	120-130	8.220	2501	98.9,98.9
140	12.26	11.86	12.20	11.06	11.02	11.45	12.77	12.20	130-140	8.504	2509	99.2,99.2
150	13.43	13.39	13.64	12.57	12.38	12.80	13.94	13.47	140-150	7.822	2517	99.5,99.5
160	14.70	14.84	14.83	13.90	13.95	14.23	15.13	14.79	150-160	6.375	2524	99.8,99.8
170	16.28	16.11	15.97	15.30	15.93	15.67	16.27	15.91	160-170	4.286	2528	99.9,99.9
180	17.55	16.81	16.96	16.58	17.55	16.81	16.95	16.57	170-180	1.555	2529	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

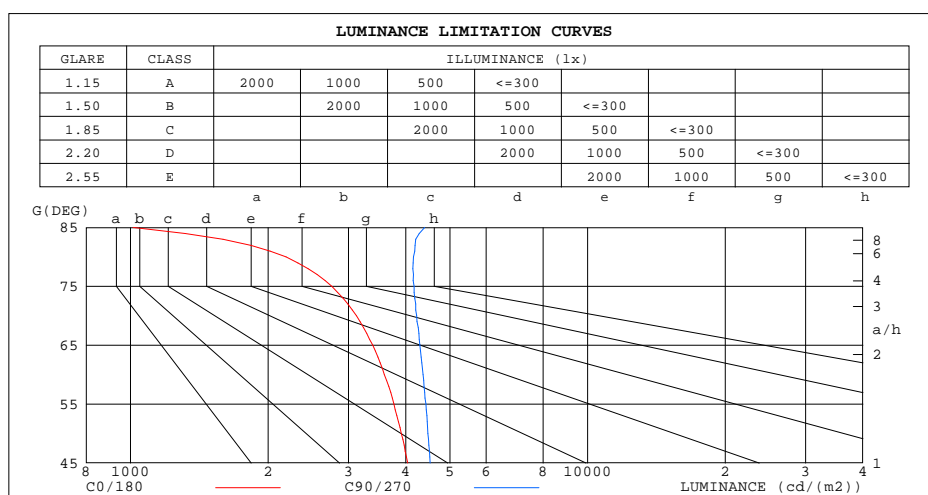

LUMINANCE cd/(m²)		
G(°)	C0/180	C90/270
85	1013	4404
80	2190	4162
75	2759	4171
70	3120	4231
65	3390	4299
60	3595	4367
55	3768	4428
50	3915	4474
45	4039	4525


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 26.3DEG
 Operators: Ethan
 Test Date: 2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity: 36%
 Test Distance: 6.770m [K=1.0000]
 Remarks: 聚鑫德源 AI40D2C-421000
 源磊A+ 13S5P/13S10P
 E款 0:10

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.3V I:0.1640A P:19.30W PF:0.9890 Lamp Flux:2529.48x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:4000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)										
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	.98	
1.0	1.03	.99	.95	1.01	.97	.94	.96	.93	.90	.92	.89	.87	.88	.86	.84	.82	
2.0	.90	.83	.78	.88	.82	.76	.84	.79	.74	.81	.76	.72	.77	.74	.70	.68	
3.0	.79	.71	.64	.77	.70	.64	.74	.68	.62	.71	.66	.61	.68	.64	.60	.57	
4.0	.70	.61	.55	.69	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49	
5.0	.63	.54	.47	.61	.53	.47	.59	.52	.46	.57	.50	.45	.55	.49	.45	.42	
6.0	.56	.47	.41	.55	.47	.41	.53	.46	.40	.51	.45	.40	.50	.44	.39	.37	
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.36	.47	.40	.35	.45	.39	.35	.33	
8.0	.47	.38	.32	.46	.38	.32	.44	.37	.32	.43	.36	.31	.42	.36	.31	.29	
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.28	.38	.32	.28	.26	
10.0	.39	.32	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24	

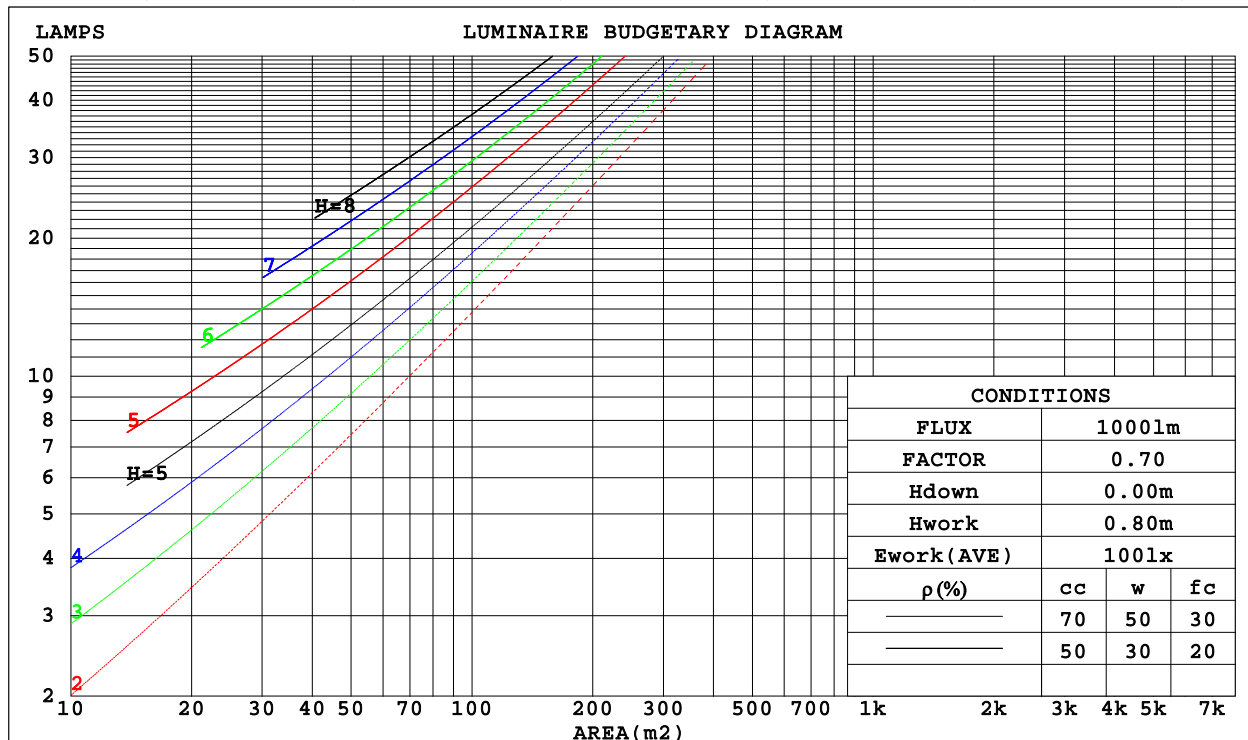

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: 聚鑫德源 AI40D2C-421000
 源磊A+ 13S5P/13S10P
 E款 0:10

WEC AND CCEC

Test:U:119.3V I:0.1640A P:19.30W PF:0.9890 Lamp Flux:2529.48x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:4000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.309	.176	.056	.301	.172	.055	.287	.165	.053	.273	.158	.051	.261	.151	.049	
2.0	.290	.159	.049	.283	.156	.048	.271	.151	.047	.259	.145	.045	.248	.140	.044	
3.0	.269	.143	.043	.262	.141	.042	.251	.136	.041	.241	.132	.040	.231	.128	.040	
4.0	.248	.129	.038	.242	.127	.037	.232	.123	.037	.223	.120	.036	.214	.116	.035	
5.0	.229	.117	.034	.224	.115	.034	.215	.112	.033	.207	.109	.032	.199	.106	.032	
6.0	.212	.107	.030	.208	.105	.030	.200	.103	.030	.193	.100	.029	.186	.098	.029	
7.0	.198	.098	.028	.194	.097	.028	.187	.094	.027	.180	.092	.027	.174	.090	.027	
8.0	.185	.090	.025	.181	.089	.025	.175	.087	.025	.169	.085	.025	.163	.084	.024	
9.0	.173	.084	.023	.170	.083	.023	.164	.081	.023	.159	.080	.023	.153	.078	.023	
10.0	.163	.078	.022	.160	.077	.022	.155	.076	.021	.150	.074	.021	.145	.073	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.206	.206	.206	.176	.176	.176	.120	.120	.120	.069	.069	.069	.022	.022	.022	
1.0	.196	.172	.150	.168	.148	.129	.115	.102	.089	.066	.059	.052	.021	.019	.017	
2.0	.188	.148	.114	.161	.127	.099	.110	.088	.069	.064	.051	.040	.020	.017	.013	
3.0	.180	.130	.091	.155	.112	.078	.106	.078	.055	.061	.046	.032	.020	.015	.011	
4.0	.173	.117	.075	.148	.101	.065	.102	.070	.046	.059	.041	.027	.019	.013	.009	
5.0	.165	.107	.064	.142	.092	.055	.098	.064	.039	.057	.038	.023	.018	.012	.008	
6.0	.158	.098	.056	.136	.085	.048	.094	.060	.034	.054	.035	.020	.018	.011	.007	
7.0	.151	.091	.050	.130	.079	.043	.090	.056	.031	.052	.033	.018	.017	.011	.006	
8.0	.145	.086	.045	.125	.074	.039	.086	.052	.028	.050	.031	.017	.016	.010	.006	
9.0	.139	.081	.042	.120	.070	.036	.083	.049	.026	.048	.029	.015	.016	.010	.005	
10.0	.133	.077	.039	.115	.066	.034	.080	.047	.024	.046	.028	.014	.015	.009	.005	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: 聚鑫德源 AI40D2C-421000
 源磊A+ 13S5P/13S10P
 E款 0:10

Uncorrected UGR Table

Test:U:119.3V I:0.1640A P:19.30W PF:0.9890 Lamp Flux:2529.48x1 lm											
NAME: 二代线条灯					TYPE:下发光 白色外壳			WEIGHT:			
DIM.: 2FT					SPEC.:4000K			SERIAL No.:YQ2107-7			
MFR.: YQ					SUR.:0.171*1.13m			PROTECTION ANGLE:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise				Viewed endwise					
x = 2H y = 2H	17.4	18.8	17.7	19.1	19.3	18.0	19.5	18.3	19.8	20.0	
	3H	18.7	20.1	19.1	20.4	20.6	19.7	21.1	20.1	21.4	21.6
	4H	19.2	20.5	19.6	20.8	21.1	20.5	21.8	20.8	22.1	22.4
	6H	19.5	20.8	19.9	21.1	21.4	21.1	22.3	21.4	22.6	22.9
	8H	19.6	20.8	20.0	21.1	21.4	21.3	22.5	21.7	22.8	23.1
	12H	19.6	20.7	20.0	21.0	21.4	21.5	22.6	21.9	23.0	23.3
4H	2H	18.0	19.3	18.4	19.6	19.9	18.6	19.9	18.9	20.2	20.5
	3H	19.6	20.7	20.0	21.1	21.4	20.4	21.6	20.8	21.9	22.3
	4H	20.2	21.3	20.6	21.6	22.0	21.3	22.3	21.7	22.7	23.1
	6H	20.6	21.6	21.1	21.9	22.4	22.0	23.0	22.5	23.3	23.8
	8H	20.7	21.6	21.2	22.0	22.4	22.3	23.2	22.8	23.6	24.0
	12H	20.7	21.5	21.2	21.9	22.4	22.6	23.4	23.1	23.8	24.3
8H	4H	20.5	21.4	21.0	21.8	22.2	21.5	22.4	21.9	22.8	23.2
	6H	21.1	21.8	21.6	22.3	22.7	22.4	23.1	22.9	23.5	24.0
	8H	21.3	21.9	21.8	22.4	22.9	22.8	23.4	23.3	23.9	24.4
	12H	21.3	21.9	21.8	22.3	22.9	23.2	23.7	23.7	24.2	24.7
12H	4H	20.6	21.4	21.0	21.8	22.2	21.5	22.3	22.0	22.7	23.2
	6H	21.2	21.8	21.7	22.3	22.8	22.4	23.1	22.9	23.5	24.0
	8H	21.4	21.9	21.9	22.4	22.9	22.9	23.4	23.4	23.9	24.4
Variations with the observer position at spacings:											
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.4					+ 0.1 / - 0.2					
2.0H	+ 0.2 / - 0.4					+ 0.2 / - 0.3					

CIE Pub.117 Corrected 2529 lm Total Lamp Luminous Flux.(8log(F/F0) = 3.2)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-08-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: 聚鑫德源 AI40D2C-421000
源磊A+ 13S5P/13S10P
E款 0:10

UTILIZATION FACTORS TABLE

Test:U:119.3V I:0.1640A P:19.30W PF:0.9890 Lamp Flux:2529.48x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:4000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	46	39	56	45	38	55	45	38	32
0.80	67	56	48	66	55	48	64	54	47	40
1.00	75	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	64	78	70	63	56
1.50	88	78	71	86	77	70	82	75	69	61
2.00	94	86	79	92	84	78	89	82	77	68
2.50	98	90	84	96	89	83	92	86	81	73
3.00	102	95	89	99	93	88	95	90	86	77
4.00	106	100	95	103	98	94	99	94	91	81
5.00	108	103	99	105	101	97	101	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: 聚鑫德源 AI40D2C-421000
 源磊A+ 13S5P/13S10P
 E款 0:10

ISOCANDELA DIAGRAM

Test:U:119.3V I:0.1640A P:19.30W PF:0.9890 Lamp Flux:2529.48x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:4000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

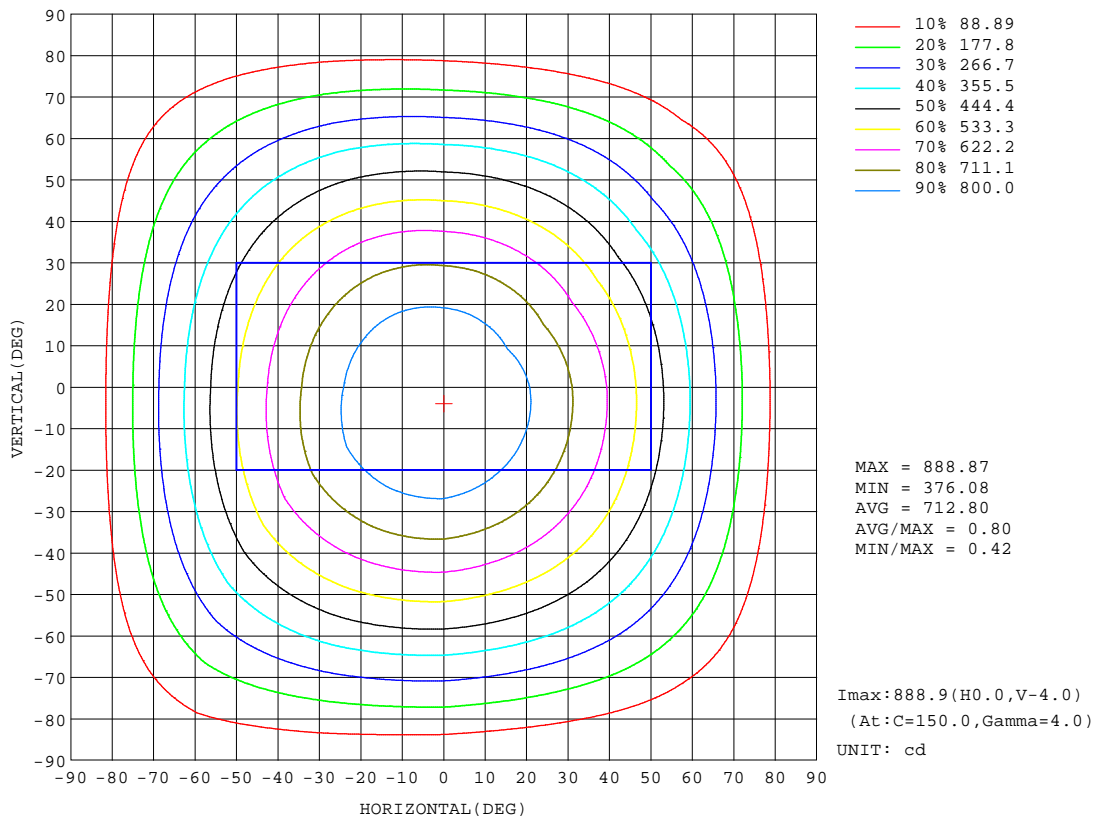


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: 聚鑫德源 AI40D2C-421000
源磊A+ 13S5P/13S10P
E款 0:10

AAI Figure

Test:U:119.3V I:0.1640A P:19.30W PF:0.9890 Lamp Flux:2529.48x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:4000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

Flux out:1764 lm

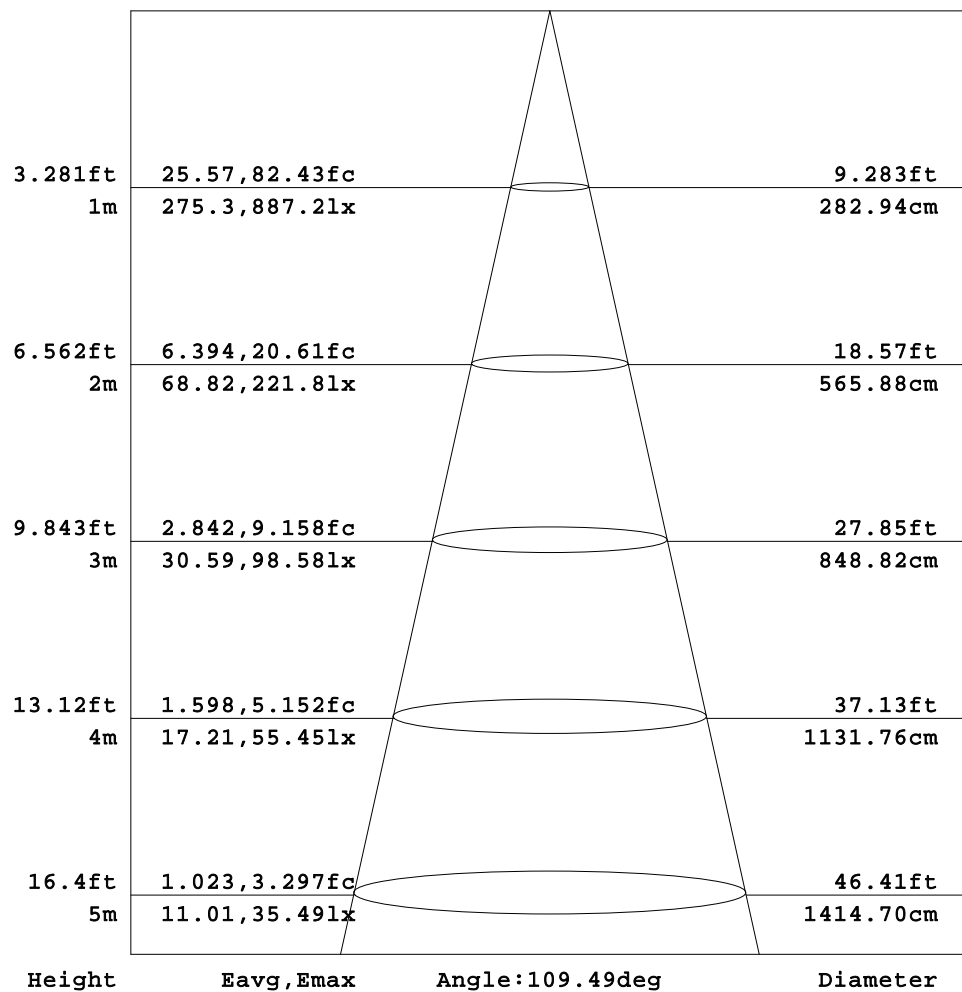


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-08-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: 聚鑫德源 AI40D2C-421000
源磊 A+ 13S5P/13S10P
E款 0:10

ISOLUX DIAGRAM


Test:U:119.3V I:0.1640A P:19.30W PF:0.9890 Lamp Flux:2529.48x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:4000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

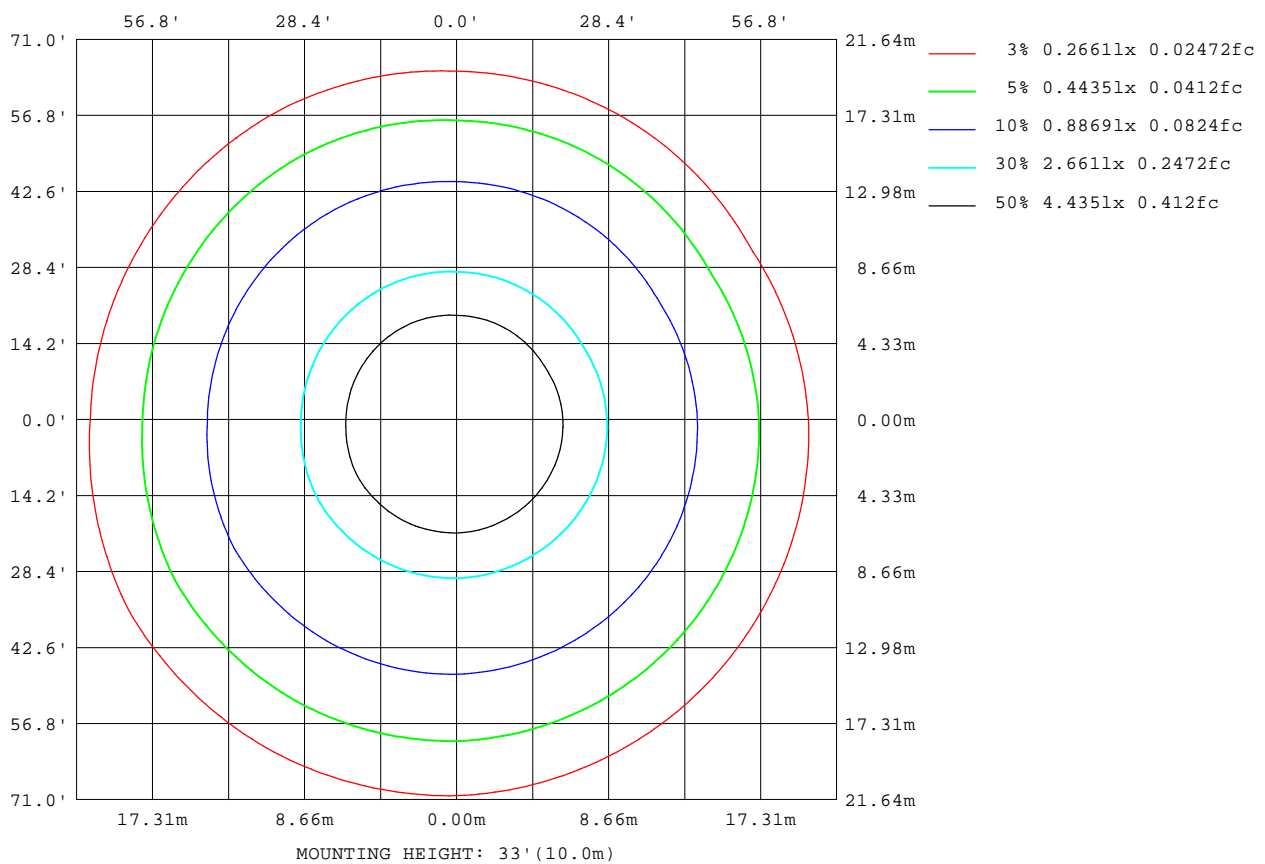

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: 聚鑫德源 AI40D2C-421000
源磊A+ 13S5P/13S10P
E款 0:10

Planar Illuminance Curve

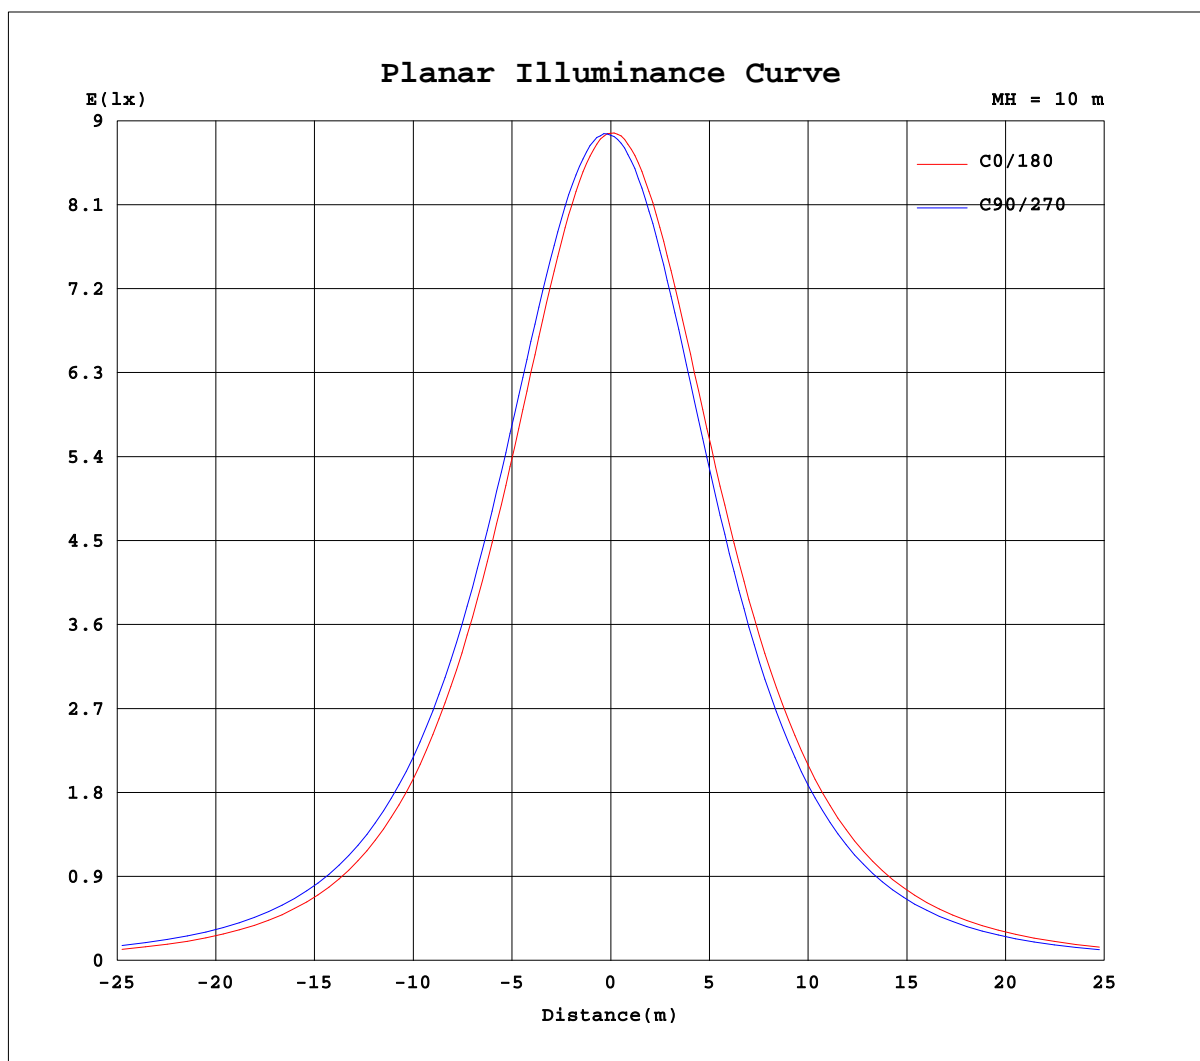

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: 聚鑫德源 AI40D2C-421000
源磊 A+ 13S5P/13S10P
E款 0:10

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.3V I:0.1640A P:19.30W PF:0.9890 Lamp Flux:2529.48x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:4000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

Table--1

UNIT: cd

C(DEC) γ (DEC)	0	30	60	90	120	150	180	210	240	270	300	330						
0	886	886	886	886	886	886	886	886	886	886	886	886						
5	878	882	885	889	889	890	884	881	877	875	872	874						
10	862	869	874	883	884	885	873	867	860	855	851	852						
15	836	846	856	868	870	871	854	846	836	828	823	823						
20	805	818	830	845	848	848	827	816	804	794	788	787						
25	765	780	796	814	819	819	792	779	766	752	746	743						
30	720	737	755	775	781	782	751	735	721	705	697	695						
35	669	688	707	729	735	736	703	686	670	651	644	642						
40	614	634	653	676	683	686	650	632	615	594	586	584						
45	551	576	594	619	626	632	593	574	555	533	525	522						
50	485	510	532	556	566	571	528	511	492	469	461	455						
55	417	441	465	491	501	503	460	444	427	403	395	386						
60	347	370	397	422	432	434	391	374	360	336	327	315						
65	276	298	325	351	362	362	320	303	290	267	257	244						
70	206	227	252	280	288	289	249	232	220	200	188	175						
75	138	158	181	209	214	217	178	162	152	134	122	109						
80	73.4	90.3	114	140	144	146	109	96.7	87.7	73.8	60.3	48.6						
85	17.0	31.0	52.8	74.2	80.2	79.5	45.9	37.1	31.9	19.9	10.9	5.17						
90	1.85	2.68	5.10	17.4	25.3	20.9	5.57	3.95	1.94	2.14	2.35	2.27						
95	2.75	2.54	2.38	2.08	1.99	1.83	2.00	2.35	2.76	3.13	3.26	3.20						
100	3.80	3.53	3.32	3.02	2.83	2.68	2.89	3.27	3.75	4.29	4.35	4.27						
105	4.98	4.65	4.41	4.16	3.85	3.68	3.91	4.31	4.84	5.57	5.52	5.43						
110	6.24	5.86	5.58	5.40	4.98	4.80	5.02	5.44	6.02	6.92	6.73	6.64						
115	7.50	7.08	6.75	6.69	6.14	5.98	6.19	6.62	7.14	8.20	7.87	7.81						
120	8.68	8.22	7.92	7.97	7.29	7.14	7.34	7.75	8.20	9.32	8.93	8.89						
125	9.76	9.27	9.00	9.20	8.36	8.23	8.43	8.81	9.21	10.4	9.93	9.85						
130	10.7	10.2	9.99	10.3	9.36	9.25	9.39	9.70	10.1	11.3	10.8	10.7						
135	11.6	11.1	10.9	11.3	10.3	10.2	10.3	10.5	10.9	12.1	11.6	11.4						
140	12.3	11.9	11.8	12.2	11.2	11.0	11.0	11.2	11.7	12.8	12.4	12.0						
145	12.9	12.6	12.7	13.0	12.0	11.7	11.7	11.9	12.4	13.4	13.0	12.6						
150	13.4	13.3	13.4	13.6	12.8	12.3	12.4	12.5	13.1	13.9	13.6	13.3						
155	14.0	14.1	14.1	14.2	13.5	12.9	13.1	13.1	13.8	14.5	14.2	14.1						
160	14.7	14.9	14.8	14.8	14.2	13.6	14.0	13.9	14.6	15.1	14.7	14.8						
165	15.5	15.7	15.4	15.4	14.9	14.3	14.9	14.7	15.2	15.7	15.2	15.4						
170	16.3	16.3	15.9	16.0	15.6	15.0	15.9	15.5	15.9	16.3	15.8	16.0						
175	17.1	16.8	16.3	16.5	16.2	15.8	16.9	16.4	16.4	16.7	16.3	16.5						
180	17.5	16.9	16.7	17.0	16.6	16.5	17.5	16.9	16.7	16.9	16.6	16.5						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-08-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: 聚鑫德源 AI40D2C-421000
源磊A+ 13S5P/13S10P
E款 0:10