


## LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.3V I:0.2120A P:25.10W PF:0.9920 Lamp Flux:3298.45x1 lm					
NAME: 二代线条灯			TYPE:下发光 白色外壳		WEIGHT:
DIM.: 2FT			SPEC.:3500K		SERIAL No.:YQ2107-7
MFR.: YQ			SUR.:0.171*1.13m		PROTECTION ANGLE:

DATA OF LAMP			PHOTOMETRIC DATA Eff: 131.41 lm/W		
MODEL		I <sub>max</sub> (cd)	1161	S/MH(C0/180)	1.21
NOMINAL POWER(W)	26	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	3298.5	η UP,DN(C0-180)	1.0,50.2
NOMINAL FLUX(lm)	3298.45	CIE CLASS	DIRECT	η UP,DN(C180-360)	1.0,47.7
LAMPS INSIDE	1	η up(%)	2.1	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	119.4	η down(%)	97.9	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

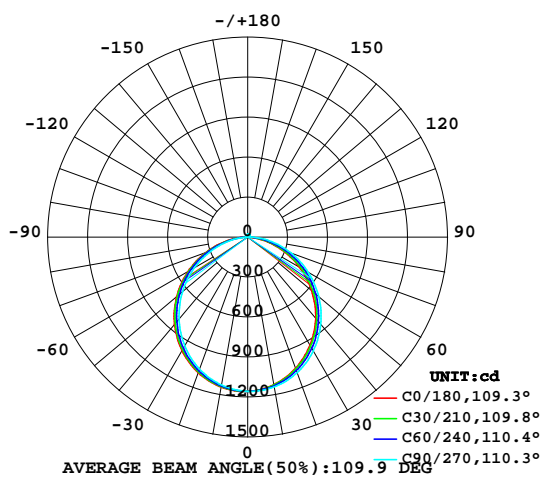

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

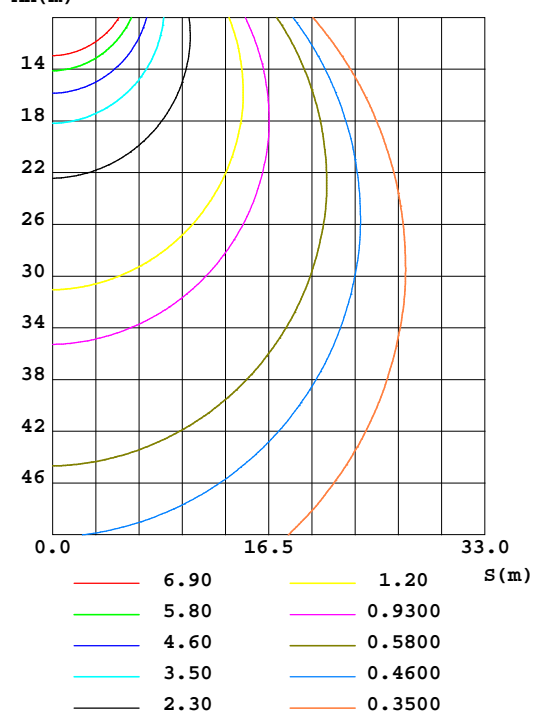


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:26.3DEG  
Operators:Ethan  
Test Date:2021-08-16

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.268  
Humidity:36%  
Test Distance:6.770m [K=1.0000]  
Remarks: 聚鑫德源 AI40D2C-421000  
源磊A+ 13S5P/13S10P  
E款 0:10

ZONAL FLUX DIAGRAM  
AND LUMINANCE LIMITATION CURVES

## ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	$\Phi$ lum, lamp
10	1125	1130	1143	1150	1144	1137	1128	1119	0- 10	109.4	109.4	3.32,3.32
20	1049	1060	1083	1097	1084	1073	1055	1039	10- 20	312.0	421.4	12.8,12.8
30	936.0	953.9	985.8	1005	985.4	970.8	944.5	923.1	20- 30	469.8	891.2	27.27
40	795.7	817.4	852.9	877.1	855.2	836.7	802.5	778.7	30- 40	561.9	1453	44.1,44.1
50	627.4	656.2	696.2	725.2	696.3	678.3	638.4	610.7	40- 50	578.1	2031	61.6,61.6
60	445.7	478.4	523.5	550.8	517.5	500.8	460.8	429.4	50- 60	517.6	2549	77.3,77.3
70	261.4	293.6	342.7	366.4	331.7	314.1	278.9	244.3	60- 70	392.5	2941	89.2,89.2
80	88.41	117.7	166.9	184.1	151.0	135.7	107.8	75.20	70- 80	226.4	3168	96.96
90	2.498	3.569	15.56	28.39	7.702	5.277	2.490	2.821	80- 90	62.89	3231	97.9,97.9
100	5.093	4.897	4.386	3.822	3.694	4.188	5.063	5.302	90-100	4.524	3235	98.1,98.1
110	8.254	7.947	7.655	6.663	6.422	6.953	8.269	8.299	100-110	6.341	3241	98.3,98.3
120	11.41	11.05	11.11	9.742	9.377	9.804	11.48	11.22	110-120	8.989	3250	98.5,98.5
130	14.02	13.67	14.11	12.48	11.97	12.36	14.14	13.72	120-130	10.69	3261	98.9,98.9
140	15.95	15.88	16.46	14.79	14.10	14.49	16.25	15.75	130-140	11.08	3272	99.2,99.2
150	17.39	17.77	18.19	16.77	15.89	16.36	17.91	17.59	140-150	10.22	3282	99.5,99.5
160	18.99	19.54	19.67	18.53	18.01	18.27	19.64	19.46	150-160	8.341	3291	99.8,99.8
170	21.02	21.03	21.09	20.39	20.66	20.23	21.22	21.03	160-170	5.611	3296	99.9,99.9
180	22.76	21.84	22.26	21.98	22.76	21.83	22.29	21.94	170-180	2.036	3298	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

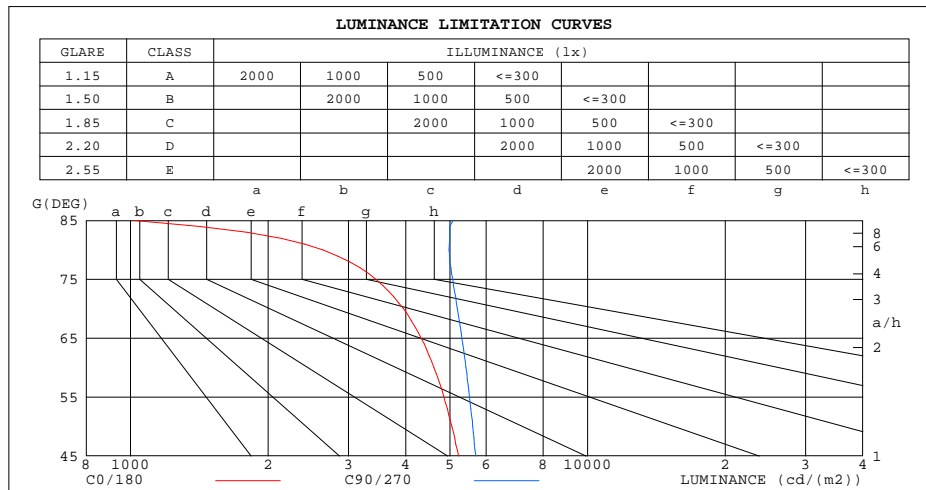

LUMINANCE cd/(m2)		
G(°)	C0/180	C90/270
85	1017	5081
80	2635	4978
75	3446	5072
70	3955	5188
65	4325	5310
60	4613	5421
55	4852	5520
50	5051	5607
45	5220	5696


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 26.3DEG  
Operators: Ethan  
Test Date: 2021-08-16

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.268  
Humidity: 36%  
Test Distance: 6.770m [K=1.0000]  
Remarks: 聚鑫德源 AI40D2C-421000  
源磊A+ 13S5P/13S10P  
E款 0:10

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.3V I:0.2120A P:25.10W PF:0.9920 Lamp Flux:3298.45x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:3500K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

$\rho_{cc}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio                      Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	.98
1.0	1.03	.99	.95	1.01	.97	.94	.96	.93	.90	.92	.89	.87	.88	.86	.84	.82
2.0	.90	.83	.78	.88	.82	.76	.84	.79	.74	.81	.76	.72	.77	.74	.70	.68
3.0	.79	.71	.64	.77	.70	.64	.74	.68	.62	.71	.66	.61	.68	.64	.60	.57
4.0	.70	.61	.55	.69	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.63	.54	.47	.61	.53	.47	.59	.52	.46	.57	.50	.45	.55	.49	.45	.42
6.0	.56	.47	.41	.55	.47	.41	.53	.46	.40	.51	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.36	.47	.40	.35	.45	.39	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.44	.37	.32	.43	.36	.31	.42	.36	.31	.29
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.28	.38	.32	.28	.26
10.0	.39	.32	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

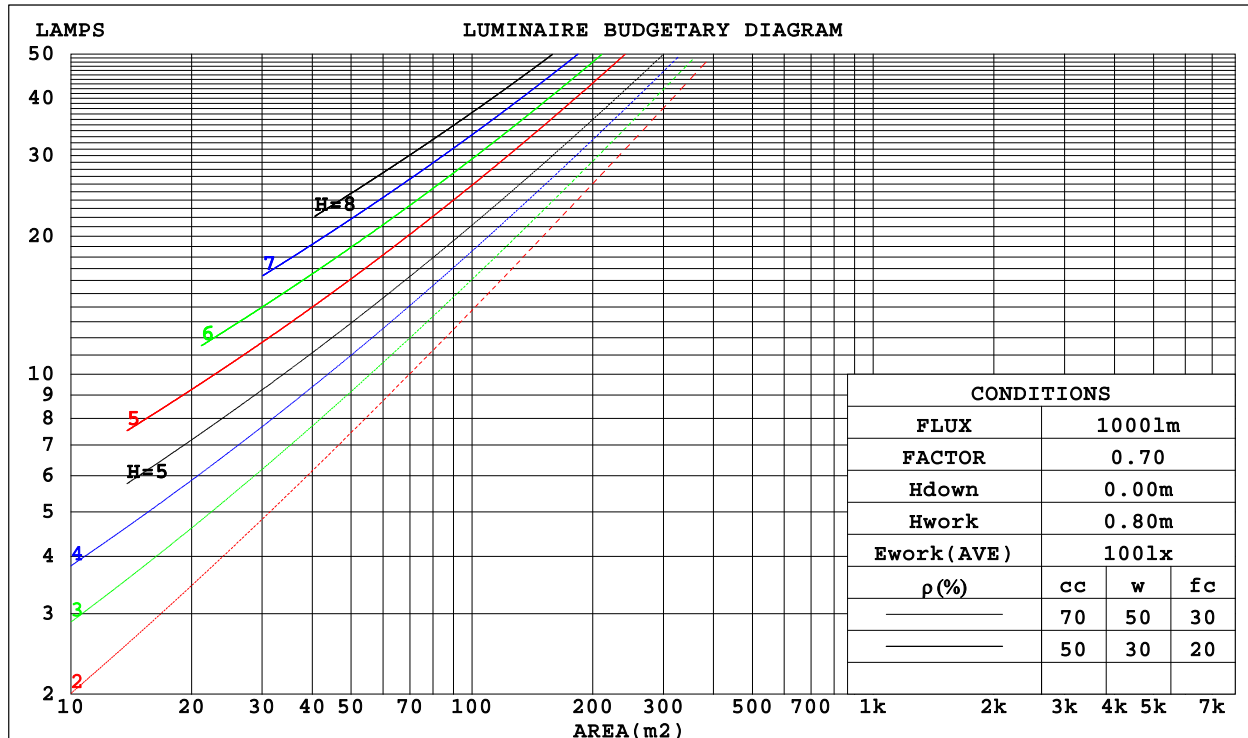

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:26.3DEG  
 Operators:Ethan  
 Test Date:2021-08-16

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.268  
 Humidity:36%  
 Test Distance:6.770m [K=1.0000]  
 Remarks: 聚鑫德源 AI40D2C-421000  
 源磊A+ 13S5P/13S10P  
 E款 0:10

## WEC AND CCEC

Test:U:119.3V I:0.2120A P:25.10W PF:0.9920 Lamp Flux:3298.45x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:3500K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.309	.175	.056	.301	.172	.055	.286	.164	.052	.273	.158	.051	.261	.151	.049	
2.0	.290	.159	.049	.283	.156	.048	.270	.150	.047	.259	.145	.045	.248	.140	.044	
3.0	.268	.143	.043	.262	.140	.042	.251	.136	.041	.240	.132	.040	.231	.128	.040	
4.0	.248	.129	.038	.242	.127	.037	.232	.123	.037	.223	.120	.036	.214	.116	.035	
5.0	.229	.117	.034	.224	.115	.034	.215	.112	.033	.207	.109	.032	.199	.106	.032	
6.0	.212	.106	.030	.208	.105	.030	.200	.103	.030	.193	.100	.029	.185	.098	.029	
7.0	.198	.098	.028	.194	.097	.028	.187	.094	.027	.180	.092	.027	.174	.090	.026	
8.0	.185	.090	.025	.181	.089	.025	.175	.087	.025	.169	.085	.025	.163	.084	.024	
9.0	.173	.084	.023	.170	.083	.023	.164	.081	.023	.159	.079	.023	.153	.078	.023	
10.0	.163	.078	.022	.160	.077	.022	.155	.076	.021	.150	.074	.021	.145	.073	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.206	.206	.206	.176	.176	.176	.120	.120	.120	.069	.069	.069	.022	.022	.022	
1.0	.196	.172	.150	.168	.148	.129	.115	.102	.089	.066	.059	.052	.021	.019	.017	
2.0	.188	.148	.114	.161	.127	.099	.110	.088	.069	.064	.051	.040	.020	.017	.013	
3.0	.180	.130	.091	.154	.112	.078	.106	.078	.055	.061	.046	.032	.020	.015	.011	
4.0	.173	.117	.075	.148	.101	.065	.102	.070	.046	.059	.041	.027	.019	.013	.009	
5.0	.165	.107	.063	.142	.092	.055	.098	.064	.039	.057	.038	.023	.018	.012	.008	
6.0	.158	.098	.055	.136	.085	.048	.094	.060	.034	.054	.035	.020	.018	.011	.007	
7.0	.151	.091	.050	.130	.079	.043	.090	.056	.031	.052	.033	.018	.017	.011	.006	
8.0	.145	.086	.045	.125	.074	.039	.086	.052	.028	.050	.031	.017	.016	.010	.005	
9.0	.139	.081	.042	.120	.070	.036	.083	.049	.026	.048	.029	.015	.016	.010	.005	
10.0	.133	.076	.039	.115	.066	.034	.080	.047	.024	.046	.028	.014	.015	.009	.005	

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:26.3DEG  
Operators:Ethan  
Test Date:2021-08-16

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.268  
Humidity:36%  
Test Distance:6.770m [K=1.0000]  
Remarks: 聚鑫德源 AI40D2C-421000  
源磊A+ 13S5P/13S10P  
E款 0:10

Uncorrected UGR Table

Test:U:119.3V I:0.2120A P:25.10W PF:0.9920 Lamp Flux:3298.45x1 lm											
NAME: 二代线条灯					TYPE:下发光 白色外壳			WEIGHT:			
DIM.: 2FT					SPEC.:3500K			SERIAL No.:YQ2107-7			
MFR.: YQ					SUR.:0.171*1.13m			PROTECTION ANGLE:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	18.1	19.6	18.4	19.8	20.1	18.7	20.2	19.0	20.4	20.6	
	3H	19.4	20.8	19.8	21.1	21.4	20.3	21.7	20.6	21.9	22.2
	4H	19.9	21.2	20.3	21.5	21.8	21.0	22.3	21.3	22.6	22.9
	6H	20.2	21.4	20.5	21.7	22.0	21.6	22.8	21.9	23.1	23.4
	8H	20.2	21.4	20.6	21.7	22.1	21.8	23.0	22.2	23.3	23.6
	12H	20.2	21.3	20.6	21.7	22.0	22.0	23.1	22.3	23.4	23.8
4H	2H	18.7	20.0	19.1	20.3	20.6	19.2	20.5	19.5	20.8	21.1
	3H	20.3	21.4	20.6	21.7	22.1	21.0	22.1	21.4	22.5	22.8
	4H	20.9	21.9	21.3	22.2	22.6	21.8	22.9	22.2	23.2	23.6
	6H	21.2	22.2	21.7	22.5	22.9	22.5	23.4	22.9	23.8	24.2
	8H	21.3	22.2	21.7	22.6	23.0	22.8	23.7	23.2	24.1	24.5
	12H	21.3	22.1	21.8	22.5	23.0	23.0	23.8	23.5	24.2	24.7
8H	4H	21.1	22.0	21.6	22.4	22.8	22.0	22.9	22.4	23.3	23.7
	6H	21.6	22.4	22.1	22.8	23.3	22.8	23.6	23.3	24.0	24.5
	8H	21.8	22.4	22.3	22.9	23.4	23.2	23.8	23.7	24.3	24.8
	12H	21.8	22.3	22.3	22.8	23.3	23.5	24.1	24.0	24.6	25.1
12H	4H	21.2	22.0	21.6	22.4	22.8	22.0	22.8	22.5	23.2	23.7
	6H	21.7	22.3	22.2	22.8	23.3	22.9	23.5	23.4	24.0	24.5
	8H	21.9	22.4	22.4	22.9	23.4	23.3	23.8	23.8	24.3	24.8
Variations with the observer position at spacings:											
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.4					+ 0.1 / - 0.3					
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					

CIE Pub.117 Corrected 3298 lm Total Lamp Luminous Flux.(8log(F/F0) = 4.1)

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:26.3DEG  
 Operators:Ethan  
 Test Date:2021-08-16

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.268  
 Humidity:36%  
 Test Distance:6.770m [K=1.0000]  
 Remarks: 聚鑫德源 AI40D2C-421000  
 源磊A+ 13S5P/13S10P  
 E款 0:10

## UTILIZATION FACTORS TABLE

Test:U:119.3V I:0.2120A P:25.10W PF:0.9920 Lamp Flux:3298.45x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:3500K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	46	39	56	45	39	55	45	38	32
0.80	67	56	48	66	55	48	64	54	48	40
1.00	76	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	64	78	70	63	56
1.50	88	78	71	86	77	70	82	75	69	61
2.00	94	86	79	92	84	78	89	82	77	69
2.50	98	91	84	96	89	83	92	86	81	73
3.00	102	95	89	99	93	88	95	90	86	77
4.00	106	100	95	103	98	94	99	94	91	81
5.00	108	103	99	105	101	97	101	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:26.3DEG  
Operators:Ethan  
Test Date:2021-08-16

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.268  
Humidity:36%  
Test Distance:6.770m [K=1.0000]  
Remarks: 聚鑫德源 AI40D2C-421000  
源磊A+ 13S5P/13S10P  
E款 0:10

## ISOCANDELA DIAGRAM

Test:U:119.3V I:0.2120A P:25.10W PF:0.9920 Lamp Flux:3298.45x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:3500K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

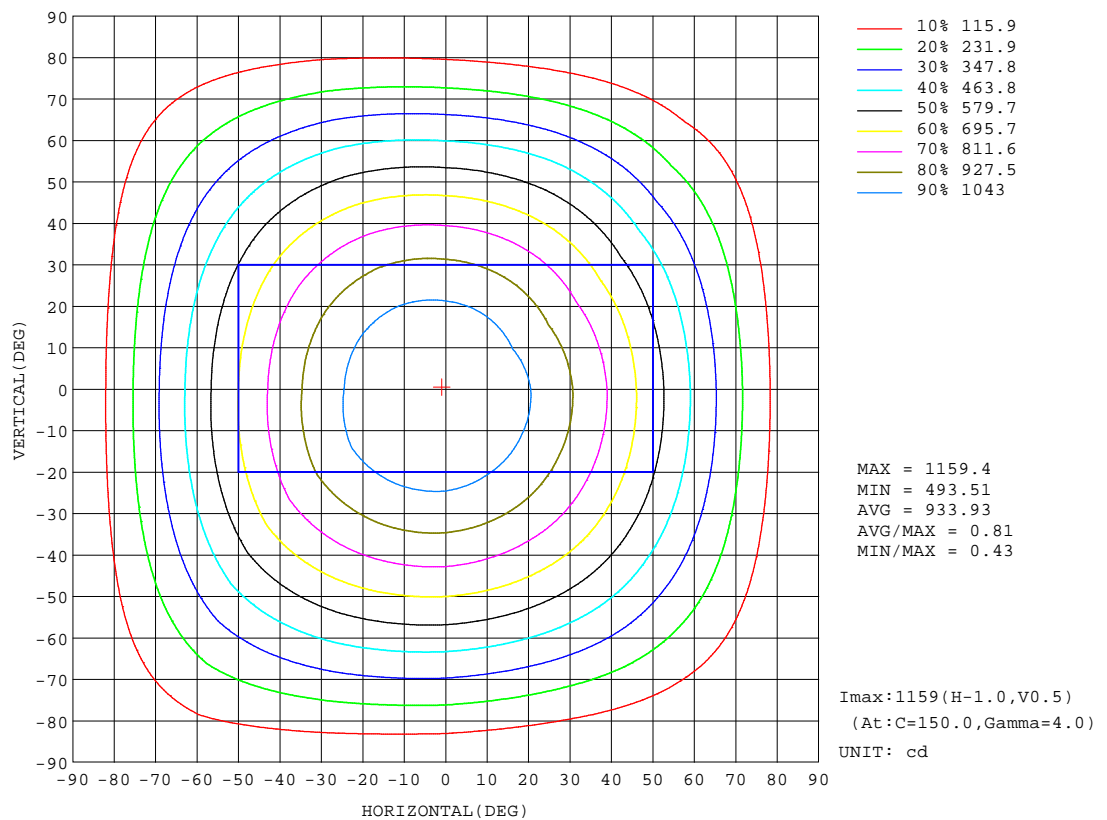


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:26.3DEG  
Operators:Ethan  
Test Date:2021-08-16

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.268  
Humidity:36%  
Test Distance:6.770m [K=1.0000]  
Remarks: 聚鑫德源 AI40D2C-421000  
源磊A+ 13S5P/13S10P  
E款 0:10

## AAI Figure

Test:U:119.3V I:0.2120A P:25.10W PF:0.9920 Lamp Flux:3298.45x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:3500K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

Flux out:2302 lm

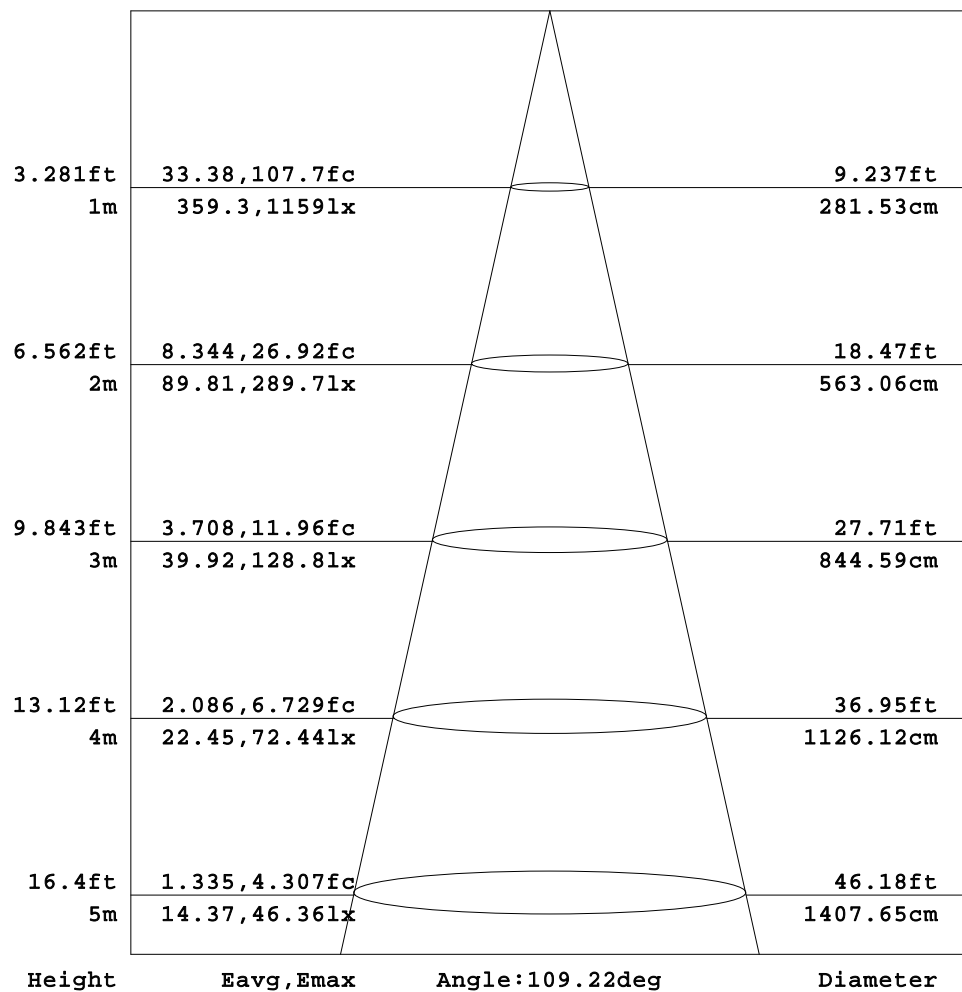


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 26.3DEG  
Operators: Ethan  
Test Date: 2021-08-16

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.268  
Humidity: 36%  
Test Distance: 6.770m [K=1.0000]  
Remarks: 聚鑫德源 AI40D2C-421000  
源磊A+ 13S5P/13S10P  
E款 0:10

## ISOLUX DIAGRAM


Test:U:119.3V I:0.2120A P:25.10W PF:0.9920 Lamp Flux:3298.45x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:3500K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

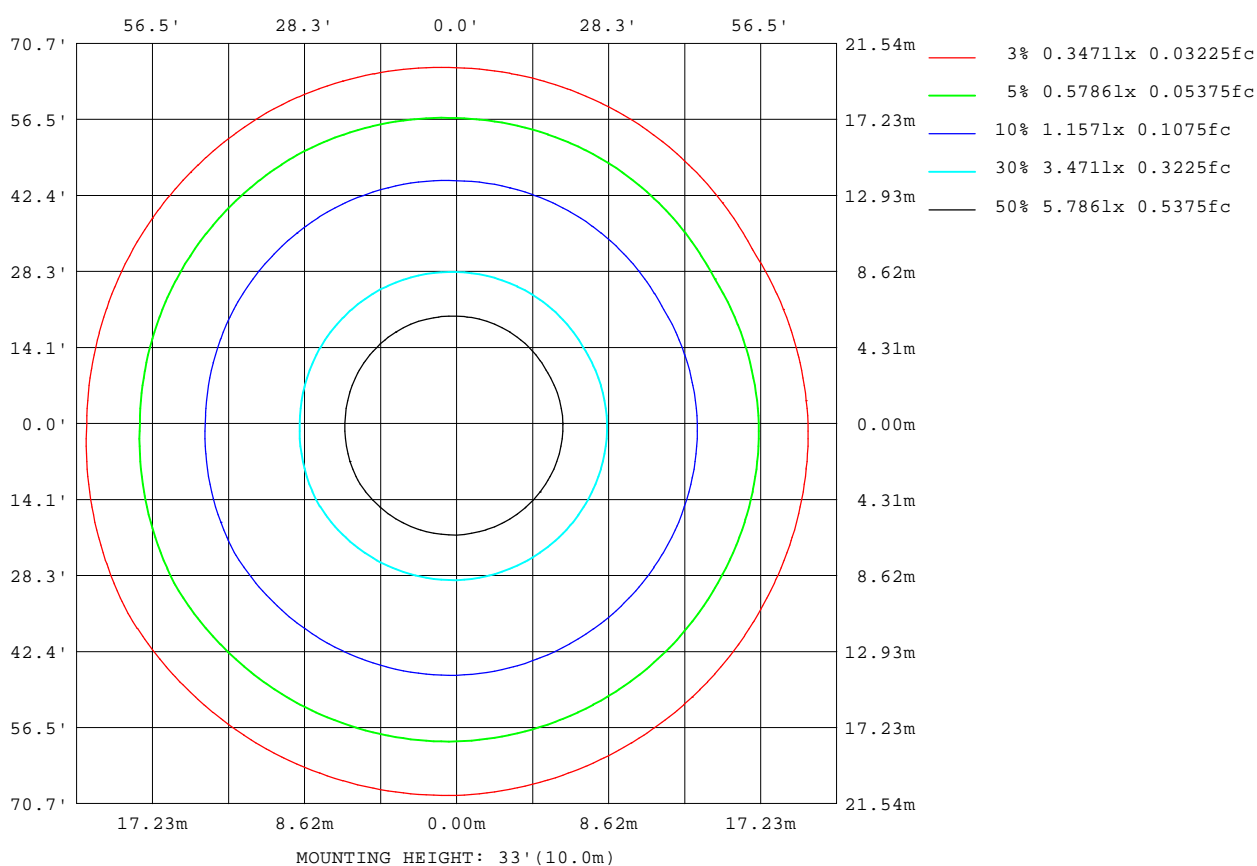

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:26.3DEG  
Operators:Ethan  
Test Date:2021-08-16

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.268  
Humidity:36%  
Test Distance:6.770m [K=1.0000]  
Remarks: 聚鑫德源 AI40D2C-421000  
源磊A+ 13S5P/13S10P  
E款 0:10

## Planar Illuminance Curve

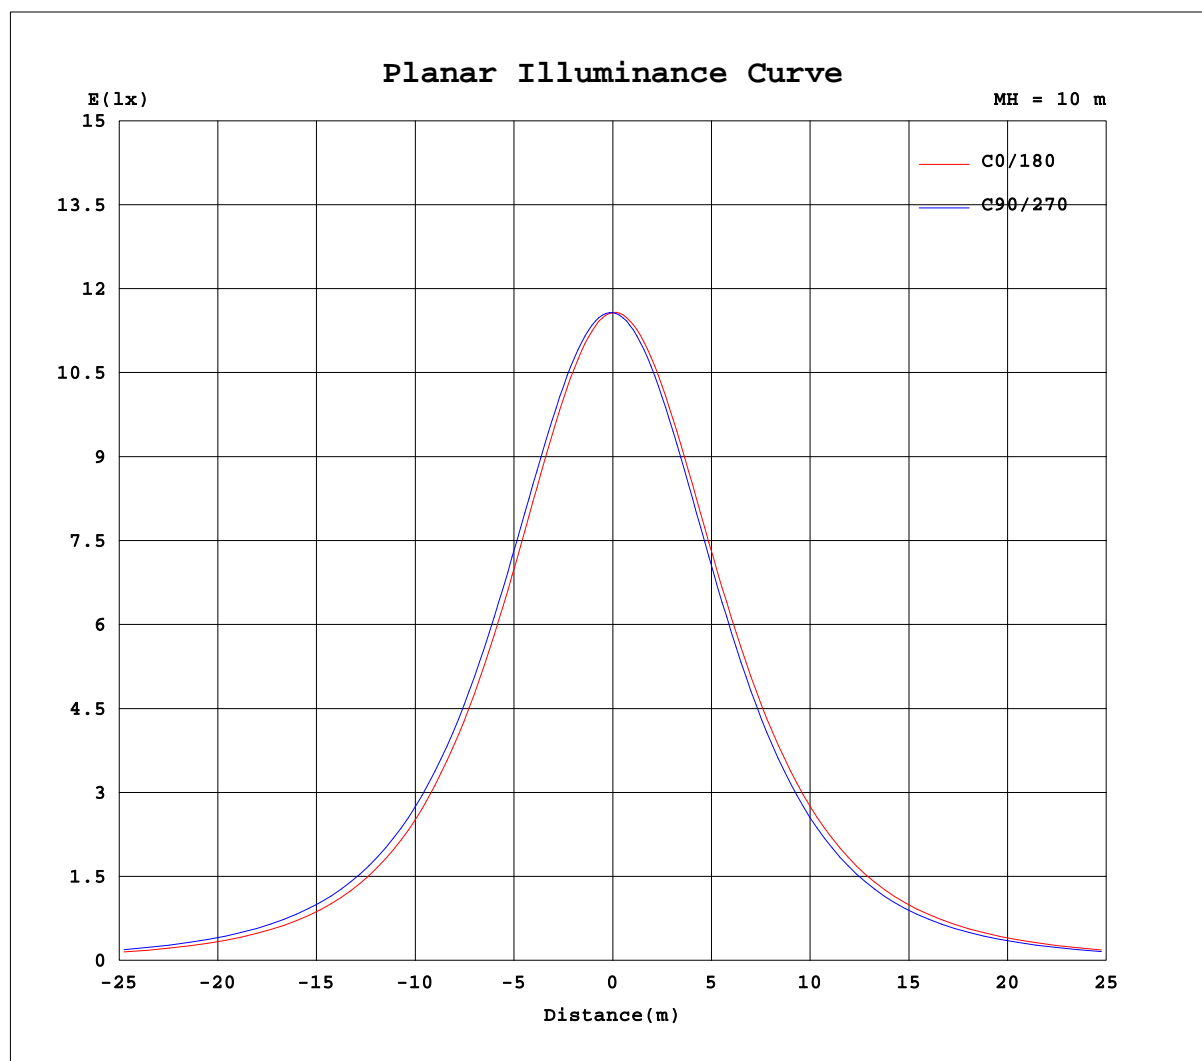

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 26.3DEG  
Operators: Ethan  
Test Date: 2021-08-16

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.268  
Humidity: 36%  
Test Distance: 6.770m [K=1.0000]  
Remarks: 聚鑫德源 AI40D2C-421000  
源磊A+ 13S5P/13S10P  
E款 0:10

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.3V I:0.2120A P:25.10W PF:0.9920 Lamp Flux:3298.45x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:3500K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

Table--1

UNIT: cd

C(DEC) γ (DEC)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1157	1157	1157	1157	1157	1157	1157	1157	1157	1157	1157	1157						
5	1147	1148	1151	1156	1158	1161	1156	1154	1152	1148	1145	1143						
10	1125	1127	1134	1143	1148	1153	1144	1140	1135	1128	1122	1117						
15	1092	1096	1105	1118	1126	1132	1119	1114	1107	1096	1089	1080						
20	1049	1055	1066	1083	1093	1101	1084	1078	1069	1055	1044	1033						
25	996	1005	1019	1039	1051	1060	1039	1031	1022	1005	992	979						
30	936	945	963	986	999	1010	985	977	965	944	930	916						
35	868	880	899	923	939	951	924	915	900	876	861	847						
40	796	808	827	853	869	885	855	845	828	802	786	771						
45	713	730	750	778	795	813	780	771	751	722	706	689						
50	627	644	668	696	715	735	696	688	669	638	621	600						
55	538	555	582	611	631	649	608	599	582	551	533	509						
60	446	463	494	523	543	558	518	508	494	461	443	416						
65	353	371	401	433	454	466	425	414	400	370	349	323						
70	261	279	309	343	361	372	332	321	308	279	257	231						
75	172	190	217	254	268	279	240	228	217	191	169	143						
80	88.4	104	132	167	180	188	151	141	131	108	86.1	64.2						
85	17.1	29.0	57.2	85.5	96.9	103	67.4	59.9	52.9	31.8	19.3	6.70						
90	2.50	2.51	4.63	15.6	28.6	28.2	7.70	6.66	3.89	2.49	2.79	2.85						
95	3.70	3.64	3.50	3.04	2.87	2.51	2.54	2.79	3.23	3.65	3.91	4.02						
100	5.09	5.00	4.79	4.39	4.01	3.64	3.69	3.94	4.44	5.06	5.25	5.35						
105	6.62	6.48	6.26	5.95	5.39	4.96	5.00	5.25	5.78	6.62	6.71	6.82						
110	8.25	8.06	7.83	7.66	6.91	6.41	6.42	6.68	7.23	8.27	8.23	8.37						
115	9.87	9.67	9.42	9.41	8.46	7.96	7.92	8.16	8.68	9.93	9.73	9.88						
120	11.4	11.2	10.9	11.1	9.99	9.50	9.38	9.54	10.1	11.5	11.2	11.3						
125	12.8	12.5	12.3	12.7	11.4	10.9	10.7	10.9	11.4	12.9	12.5	12.6						
130	14.0	13.7	13.6	14.1	12.7	12.2	12.0	12.1	12.6	14.1	13.7	13.7						
135	15.1	14.8	14.8	15.4	13.9	13.4	13.1	13.2	13.7	15.3	14.8	14.8						
140	16.0	15.8	16.0	16.5	15.1	14.5	14.1	14.2	14.8	16.3	15.9	15.6						
145	16.7	16.7	17.0	17.4	16.1	15.5	15.0	15.1	15.8	17.1	16.8	16.5						
150	17.4	17.6	17.9	18.2	17.2	16.4	15.9	16.0	16.8	17.9	17.7	17.5						
155	18.1	18.5	18.7	18.9	18.0	17.2	16.8	16.8	17.7	18.7	18.5	18.5						
160	19.0	19.6	19.5	19.7	19.0	18.1	18.0	17.8	18.7	19.6	19.4	19.5						
165	20.0	20.5	20.3	20.4	19.9	19.0	19.3	18.9	19.6	20.4	20.1	20.4						
170	21.0	21.3	20.8	21.1	20.8	20.0	20.7	19.9	20.5	21.2	20.9	21.2						
175	22.2	21.8	21.3	21.8	21.5	21.0	21.9	21.1	21.4	21.9	21.6	21.8						
180	22.8	21.9	21.8	22.3	22.1	21.9	22.8	21.9	21.8	22.3	22.0	21.8						

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:26.3DEG  
Operators:Ethan  
Test Date:2021-08-16

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.268  
Humidity:36%  
Test Distance:6.770m [K=1.0000]  
Remarks: 聚鑫德源 AI40D2C-421000  
源磊A+ 13S5P/13S10P  
E款 0:10