


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.2V I:0.2660A P:31.50W PF:0.9950 Lamp Flux:3947.72x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:4000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 125.32 lm/W			
MODEL		I _{max} (cd)	1389	S/MH(C0/180)	1.21
NOMINAL POWER(W)	32	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	3947.7	η UP,DN(C0-180)	1.0,50.3
NOMINAL FLUX(lm)	3947.72	CIE CLASS	DIRECT	η UP,DN(C180-360)	1.0,47.6
LAMPS INSIDE	1	η up(%)	2.1	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	119.2	η down(%)	97.9	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

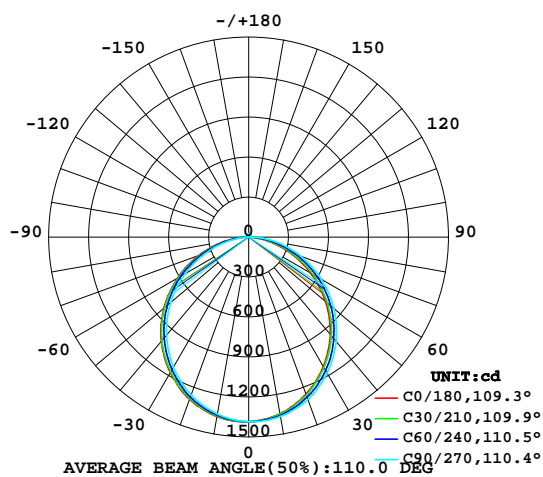

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

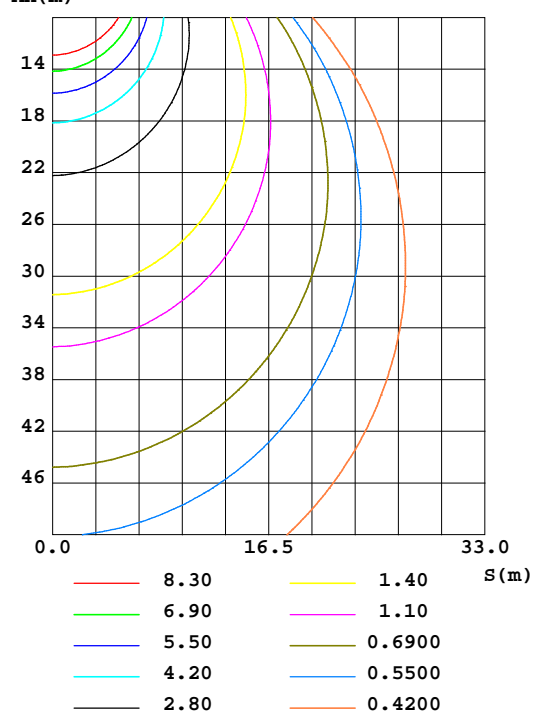


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: 聚鑫德源 AI40D2C-421000
 源磊A+ 13S5P/13S10P
 E款 0:10

ZONAL FLUX DIAGRAM AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum, lamp
10	1346	1354	1367	1377	1368	1361	1348	1339	0- 10	130.9	130.9	3.32,3.32
20	1255	1271	1297	1314	1296	1284	1261	1242	10- 20	373.4	504.3	12.8,12.8
30	1122	1143	1179	1203	1175	1161	1129	1103	20- 30	562.0	1066	27,27
40	954.4	980.0	1022	1051	1020	1000	958.7	930.6	30- 40	672.3	1739	44,44
50	752.7	788.1	834.2	869.4	830.3	810.6	763.9	730.0	40- 50	692.0	2431	61.6,61.6
60	533.4	575.3	627.3	661.1	618.0	598.4	550.1	512.1	50- 60	619.9	3051	77.3,77.3
70	312.8	353.0	411.3	439.4	395.8	374.3	331.9	291.2	60- 70	469.5	3520	89.2,89.2
80	106.1	143.8	200.6	221.1	179.6	161.1	128.6	89.27	70- 80	271.1	3791	96,96
90	2.992	4.411	18.85	34.12	9.108	6.210	3.004	3.401	80- 90	75.36	3866	97.9,97.9
100	6.081	5.855	5.237	4.572	4.434	5.049	6.097	6.372	90-100	5.426	3872	98.1,98.1
110	9.821	9.492	9.134	7.968	7.703	8.357	9.919	9.952	100-110	7.594	3880	98.3,98.3
120	13.55	13.18	13.26	11.65	11.27	11.82	13.75	13.42	110-120	10.76	3890	98.5,98.5
130	16.68	16.31	16.83	14.92	14.42	14.85	16.93	16.41	120-130	12.79	3903	98.9,98.9
140	19.02	18.94	19.66	17.71	16.94	17.39	19.50	18.88	130-140	13.26	3916	99.2,99.2
150	20.84	21.22	21.72	20.07	19.10	19.63	21.48	21.09	140-150	12.24	3929	99.5,99.5
160	22.70	23.36	23.46	22.17	21.69	21.98	23.54	23.33	150-160	9.990	3939	99.8,99.8
170	25.13	25.22	25.26	24.38	24.91	24.38	25.41	25.20	160-170	6.726	3945	99.9,99.9
180	27.28	26.33	26.76	26.21	27.29	26.33	26.76	26.21	170-180	2.442	3948	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

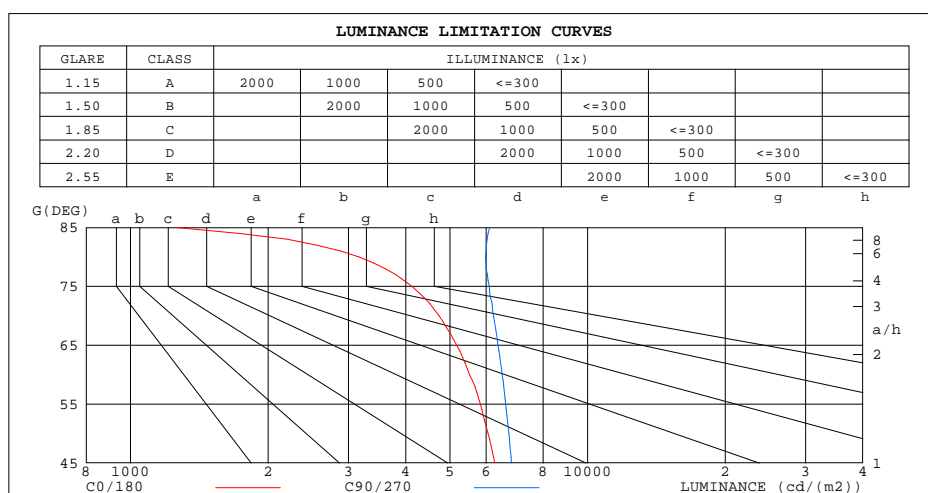

LUMINANCE cd/(m ²)		
G(°)	C0/180	C90/270
85	1253	6110
80	3159	5983
75	4126	6093
70	4731	6229
65	5176	6373
60	5519	6499
55	5827	6621
50	6058	6722
45	6262	6819


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: 聚鑫德源 AI40D2C-421000
源磊A+ 13S5P/13S10P
E款 0:10

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.2V I:0.2660A P:31.50W PF:0.9950 Lamp Flux:3947.72x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:4000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	.98
1.0	1.03	.99	.95	1.01	.97	.94	.96	.93	.90	.92	.89	.87	.88	.86	.84	.82
2.0	.90	.83	.78	.88	.82	.76	.84	.79	.74	.81	.76	.72	.77	.74	.70	.68
3.0	.79	.71	.64	.77	.70	.64	.74	.68	.62	.71	.66	.61	.68	.64	.60	.57
4.0	.70	.61	.55	.69	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.63	.54	.47	.61	.53	.47	.59	.52	.46	.57	.50	.45	.55	.49	.45	.42
6.0	.56	.47	.41	.55	.47	.41	.53	.46	.40	.51	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.36	.47	.40	.35	.45	.39	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.44	.37	.32	.43	.36	.31	.42	.36	.31	.29
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.28	.38	.32	.28	.26
10.0	.39	.32	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

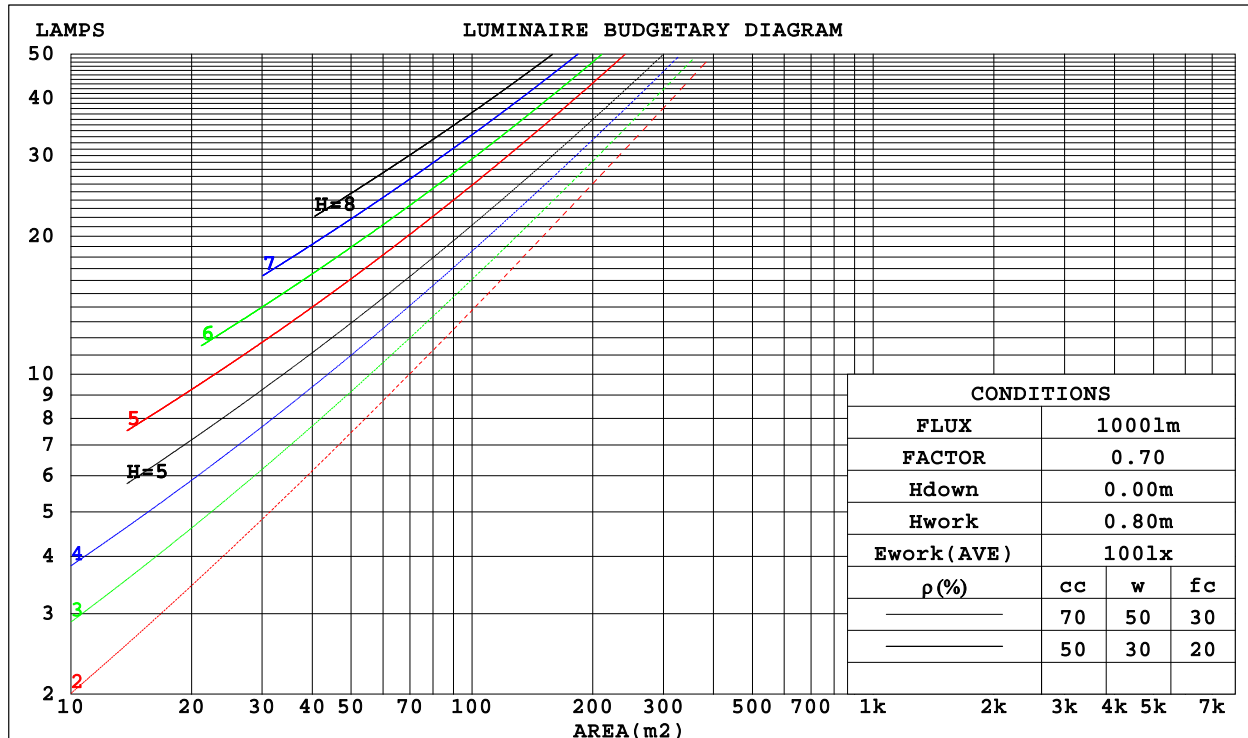

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 26.3DEG
 Operators: Ethan
 Test Date: 2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity: 36%
 Test Distance: 6.770m [K=1.0000]
 Remarks: 聚鑫德源 AI40D2C-421000
 源磊A+ 13S5P/13S10P
 E款 0:10

WEC AND CCEC

Test:U:119.2V I:0.2660A P:31.50W PF:0.9950 Lamp Flux:3947.72x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:4000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.309	.175	.056	.301	.172	.055	.286	.164	.052	.273	.158	.051	.261	.151	.049	
2.0	.290	.159	.049	.283	.156	.048	.270	.150	.047	.259	.145	.045	.248	.140	.044	
3.0	.268	.143	.043	.262	.140	.042	.251	.136	.041	.241	.132	.040	.231	.128	.040	
4.0	.248	.129	.038	.242	.127	.037	.232	.123	.037	.223	.120	.036	.214	.116	.035	
5.0	.229	.117	.034	.224	.115	.034	.215	.112	.033	.207	.109	.032	.199	.106	.032	
6.0	.212	.106	.030	.208	.105	.030	.200	.103	.030	.193	.100	.029	.185	.098	.029	
7.0	.198	.098	.028	.194	.097	.028	.187	.094	.027	.180	.092	.027	.174	.090	.026	
8.0	.185	.090	.025	.181	.089	.025	.175	.087	.025	.169	.085	.025	.163	.084	.024	
9.0	.173	.084	.023	.170	.083	.023	.164	.081	.023	.159	.079	.023	.153	.078	.023	
10.0	.163	.078	.022	.160	.077	.022	.155	.076	.021	.150	.074	.021	.145	.073	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.206	.206	.206	.176	.176	.176	.120	.120	.120	.069	.069	.069	.022	.022	.022	
1.0	.196	.172	.150	.168	.148	.129	.115	.102	.089	.066	.059	.052	.021	.019	.017	
2.0	.188	.148	.114	.161	.127	.099	.110	.088	.069	.064	.051	.040	.020	.017	.013	
3.0	.180	.130	.091	.154	.112	.078	.106	.078	.055	.061	.046	.032	.020	.015	.011	
4.0	.173	.117	.075	.148	.101	.065	.102	.070	.046	.059	.041	.027	.019	.013	.009	
5.0	.165	.107	.063	.142	.092	.055	.098	.064	.039	.057	.038	.023	.018	.012	.008	
6.0	.158	.098	.055	.136	.085	.048	.094	.060	.034	.054	.035	.020	.018	.011	.007	
7.0	.151	.091	.050	.130	.079	.043	.090	.056	.031	.052	.033	.018	.017	.011	.006	
8.0	.145	.086	.045	.125	.074	.039	.086	.052	.028	.050	.031	.017	.016	.010	.005	
9.0	.139	.081	.042	.120	.070	.036	.083	.049	.026	.048	.029	.015	.016	.010	.005	
10.0	.133	.076	.039	.115	.066	.034	.080	.047	.024	.046	.028	.014	.015	.009	.005	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: 聚鑫德源 AI40D2C-421000
 源磊A+ 13S5P/13S10P
 E款 0:10

Uncorrected UGR Table

Test:U:119.2V I:0.2660A P:31.50W PF:0.9950 Lamp Flux:3947.72x1 lm											
NAME: 二代线条灯					TYPE:下发光 白色外壳			WEIGHT:			
DIM.: 2FT					SPEC.:4000K			SERIAL No.:YQ2107-7			
MFR.: YQ					SUR.:0.171*1.13m			PROTECTION ANGLE:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	18.7	20.2	19.0	20.5	20.7	19.3	20.8	19.6	21.0	21.3	
	3H	20.1	21.4	20.4	21.7	22.0	21.0	22.3	21.3	22.6	22.9
	4H	20.5	21.8	20.9	22.1	22.4	21.7	23.0	22.0	23.2	23.5
	6H	20.8	22.0	21.2	22.4	22.7	22.2	23.5	22.6	23.8	24.1
	8H	20.9	22.0	21.2	22.4	22.7	22.4	23.6	22.8	24.0	24.3
	12H	20.8	22.0	21.2	22.3	22.7	22.6	23.8	23.0	24.1	24.4
4H	2H	19.4	20.7	19.7	21.0	21.3	19.8	21.1	20.2	21.4	21.7
	3H	20.9	22.0	21.3	22.4	22.7	21.6	22.8	22.0	23.1	23.5
	4H	21.5	22.5	21.9	22.9	23.3	22.5	23.5	22.9	23.9	24.2
	6H	21.9	22.8	22.3	23.2	23.6	23.2	24.1	23.6	24.5	24.9
	8H	21.9	22.8	22.4	23.2	23.6	23.5	24.3	23.9	24.7	25.2
	12H	21.9	22.7	22.4	23.1	23.6	23.7	24.5	24.1	24.9	25.3
8H	4H	21.8	22.6	22.2	23.0	23.5	22.7	23.5	23.1	23.9	24.4
	6H	22.3	23.0	22.8	23.4	23.9	23.5	24.2	24.0	24.7	25.1
	8H	22.4	23.0	22.9	23.5	24.0	23.9	24.5	24.4	25.0	25.5
	12H	22.4	23.0	23.0	23.5	24.0	24.2	24.7	24.7	25.2	25.7
12H	4H	21.8	22.6	22.3	23.0	23.5	22.7	23.4	23.1	23.9	24.3
	6H	22.4	23.0	22.8	23.5	23.9	23.5	24.2	24.0	24.6	25.1
	8H	22.5	23.1	23.0	23.5	24.1	23.9	24.5	24.4	25.0	25.5
Variations with the observer position at spacings:											
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.3					
2.0H	+ 0.2 / - 0.4					+ 0.2 / - 0.3					

CIE Pub.117 Corrected 3948 lm Total Lamp Luminous Flux.(8log(F/F0) = 4.8)

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: 聚鑫德源 AI40D2C-421000
 源磊A+ 13S5P/13S10P
 E款 0:10

UTILIZATION FACTORS TABLE

Test:U:119.2V I:0.2660A P:31.50W PF:0.9950 Lamp Flux:3947.72x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:4000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	46	39	56	45	39	55	45	38	32
0.80	67	56	48	66	55	48	64	54	48	40
1.00	76	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	64	78	70	63	56
1.50	88	78	71	86	77	70	82	75	69	61
2.00	94	86	79	92	84	78	89	82	77	69
2.50	98	91	84	96	89	83	92	86	81	73
3.00	102	95	89	99	93	88	95	90	86	77
4.00	106	100	95	103	98	94	99	94	91	81
5.00	108	103	99	105	101	97	101	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: 聚鑫德源 AI40D2C-421000
 源磊A+ 13S5P/13S10P
 E款 0:10

ISOCANDELA DIAGRAM

Test:U:119.2V I:0.2660A P:31.50W PF:0.9950 Lamp Flux:3947.72x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:4000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

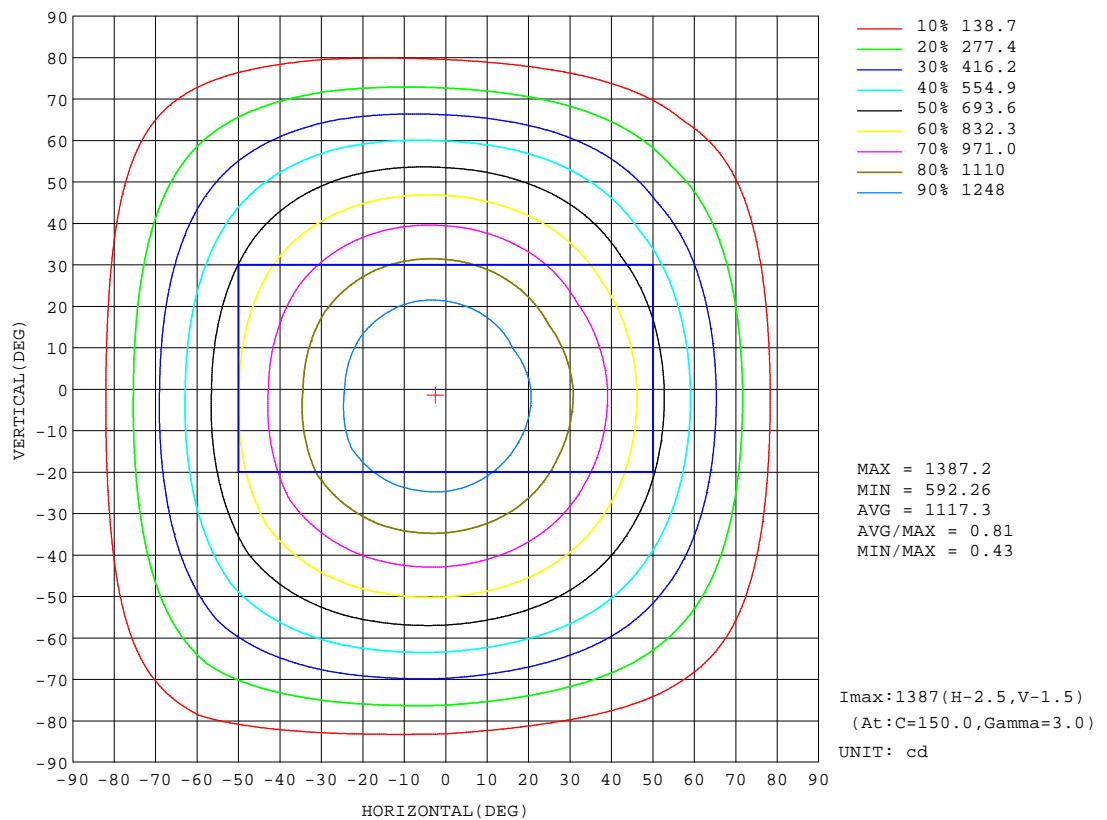


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: 聚鑫德源 AI40D2C-421000
源磊A+ 13S5P/13S10P
E款 0:10

AAI Figure

Test:U:119.2V I:0.2660A P:31.50W PF:0.9950 Lamp Flux:3947.72x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:4000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

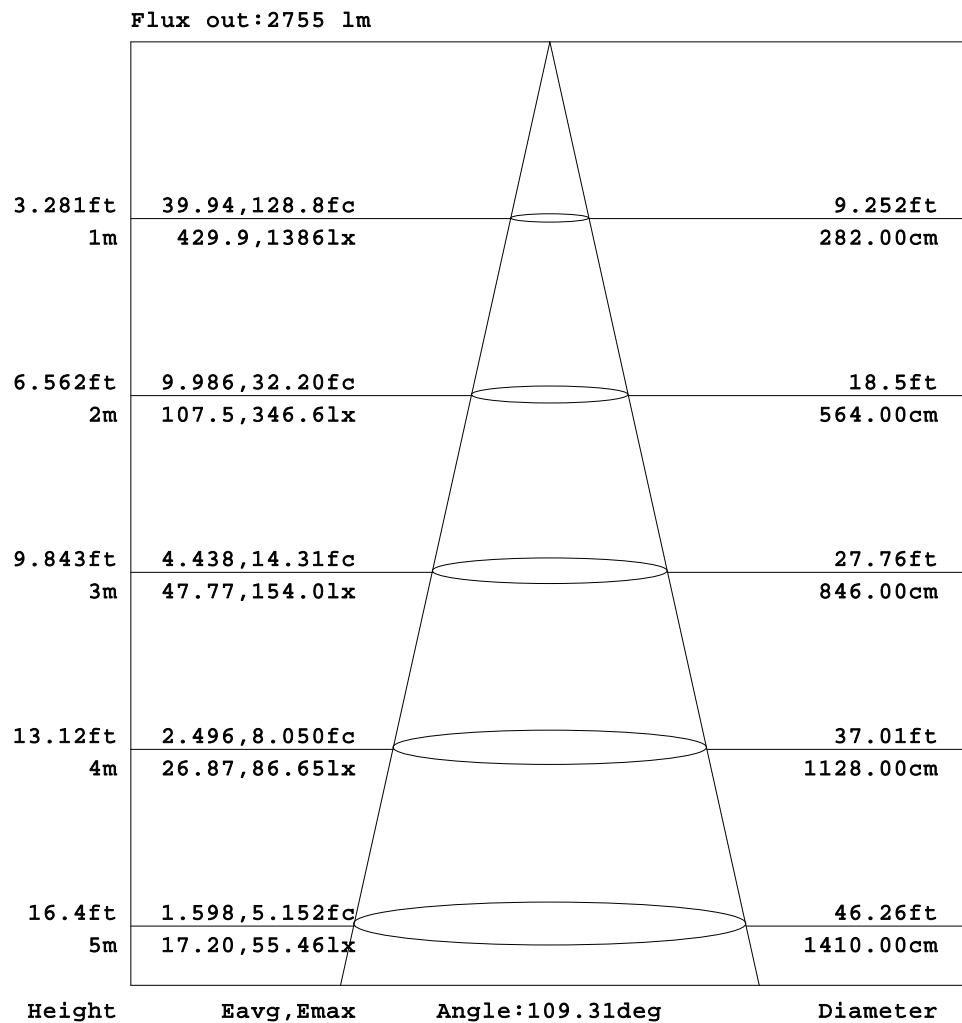


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-08-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: 聚鑫德源 AI40D2C-421000
源磊A+ 13S5P/13S10P
E款 0:10

ISOLUX DIAGRAM


Test:U:119.2V I:0.2660A P:31.50W PF:0.9950 Lamp Flux:3947.72x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:4000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

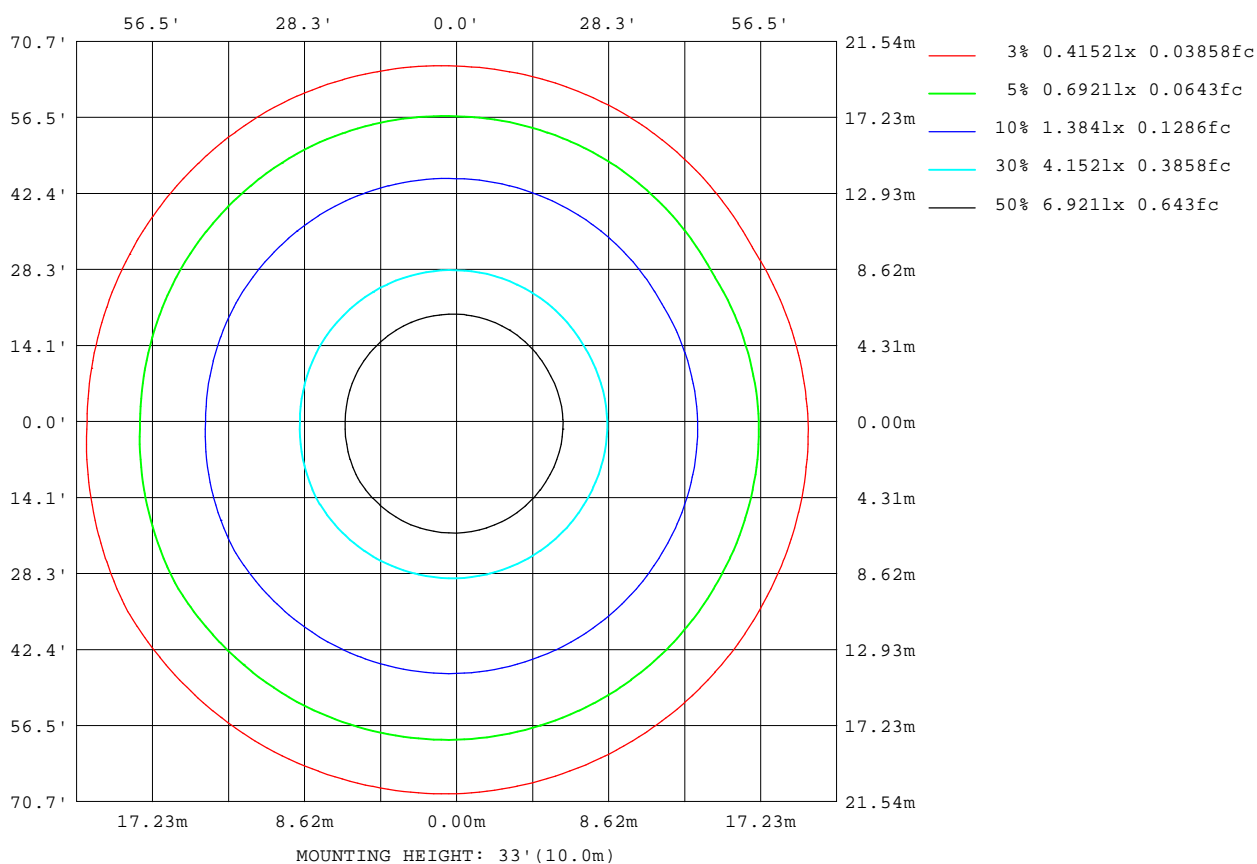

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: 聚鑫德源 AI40D2C-421000
源磊A+ 13S5P/13S10P
E款 0:10

Planar Illuminance Curve

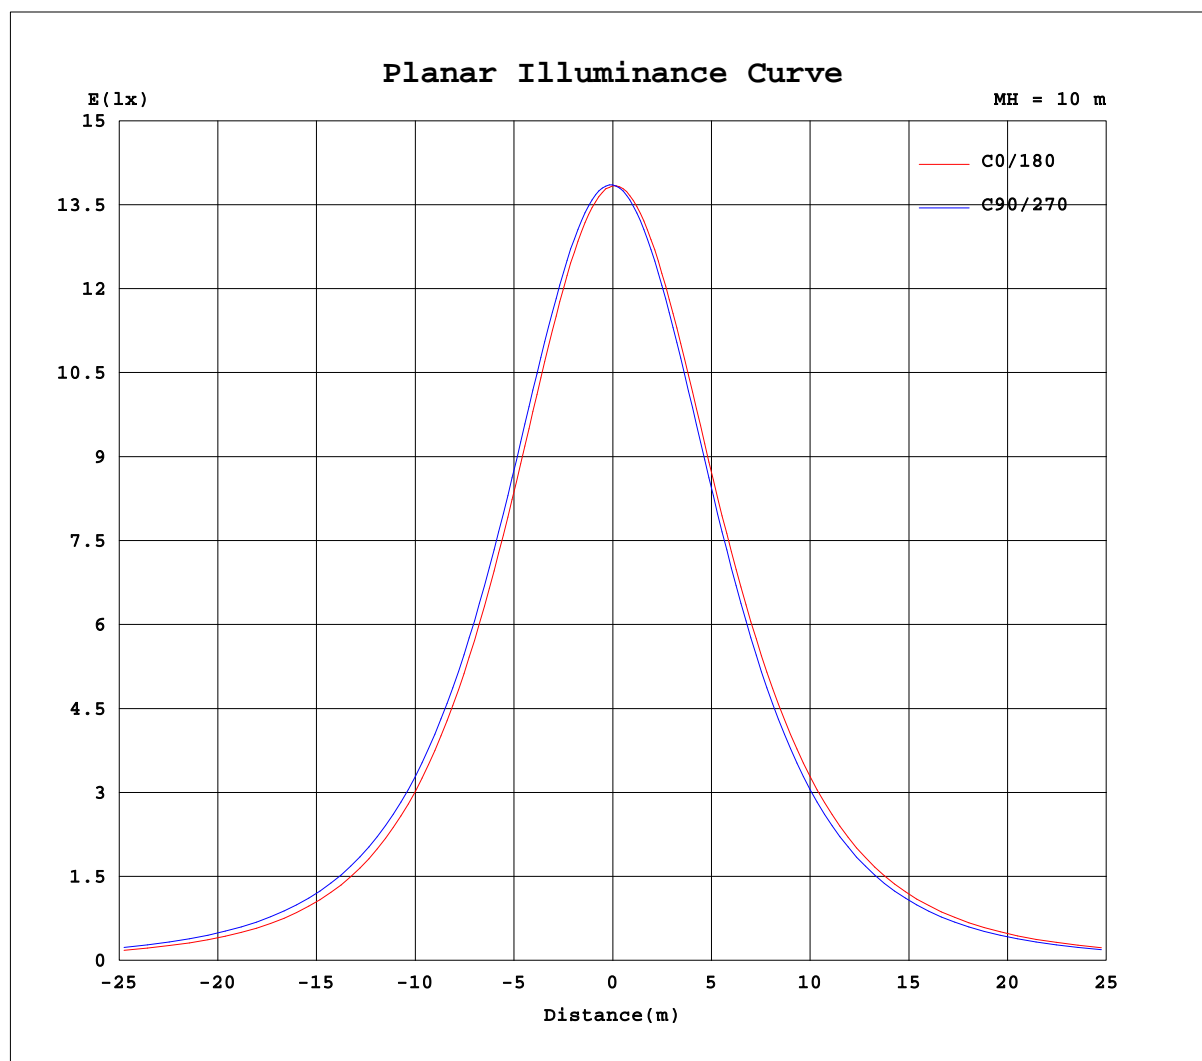

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-08-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: 聚鑫德源 AI40D2C-421000
源磊 A+ 13S5P/13S10P
E款 0:10

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.2V I:0.2660A P:31.50W PF:0.9950 Lamp Flux:3947.72x1 lm		
NAME: 二代线条灯	TYPE:下发光 白色外壳	WEIGHT:
DIM.: 2FT	SPEC.:4000K	SERIAL No.:YQ2107-7
MFR.: YQ	SUR.:0.171*1.13m	PROTECTION ANGLE:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1385	1385	1385	1385	1385	1385	1385	1385	1385	1385	1385	1385						
5	1372	1375	1378	1383	1386	1389	1383	1381	1378	1373	1370	1368						
10	1346	1350	1358	1367	1375	1379	1368	1364	1358	1348	1342	1336						
15	1307	1313	1325	1338	1349	1355	1338	1333	1324	1311	1301	1292						
20	1255	1263	1279	1297	1311	1318	1296	1290	1278	1261	1248	1236						
25	1193	1200	1222	1244	1260	1270	1241	1235	1218	1201	1183	1171						
30	1122	1131	1156	1179	1198	1207	1175	1170	1151	1129	1110	1096						
35	1041	1052	1079	1104	1126	1137	1102	1095	1074	1048	1027	1013						
40	954	967	993	1022	1045	1058	1020	1012	988	959	938	923						
45	856	874	902	931	956	972	931	923	896	864	842	825						
50	753	772	804	834	860	879	830	824	797	764	741	720						
55	646	665	702	733	760	776	726	718	694	659	636	610						
60	533	555	595	627	655	667	618	608	589	550	528	496						
65	423	444	482	520	546	557	507	494	477	440	416	385						
70	313	334	372	411	434	445	396	383	366	332	307	276						
75	206	228	263	304	323	334	286	272	257	227	201	171						
80	106	126	161	201	217	226	180	167	155	129	102	76.3						
85	21.1	35.1	67.6	103	117	125	79.2	70.8	62.0	37.9	22.6	8.02						
90	2.99	3.00	5.82	18.9	34.5	33.8	9.11	7.94	4.48	3.00	3.36	3.44						
95	4.42	4.36	4.18	3.64	3.43	3.01	3.06	3.37	3.89	4.40	4.71	4.84						
100	6.08	5.97	5.73	5.24	4.79	4.36	4.43	4.74	5.36	6.10	6.32	6.43						
105	7.88	7.74	7.48	7.11	6.41	5.94	6.00	6.31	6.98	7.95	8.05	8.17						
110	9.82	9.64	9.34	9.13	8.26	7.68	7.70	8.01	8.71	9.92	9.88	10.0						
115	11.7	11.5	11.2	11.2	10.1	9.55	9.50	9.81	10.5	11.9	11.7	11.8						
120	13.5	13.3	13.0	13.3	11.9	11.4	11.3	11.5	12.1	13.8	13.4	13.5						
125	15.2	14.9	14.7	15.1	13.6	13.1	12.9	13.1	13.7	15.5	15.0	15.0						
130	16.7	16.4	16.3	16.8	15.2	14.7	14.4	14.5	15.2	16.9	16.4	16.4						
135	17.9	17.7	17.7	18.3	16.6	16.1	15.8	15.9	16.5	18.3	17.8	17.6						
140	19.0	18.8	19.0	19.7	18.0	17.4	16.9	17.0	17.8	19.5	19.0	18.7						
145	20.0	20.0	20.3	20.8	19.3	18.6	18.0	18.1	19.0	20.5	20.1	19.8						
150	20.8	21.1	21.4	21.7	20.5	19.6	19.1	19.1	20.1	21.5	21.2	21.0						
155	21.7	22.2	22.3	22.6	21.6	20.6	20.3	20.2	21.3	22.5	22.2	22.2						
160	22.7	23.4	23.3	23.5	22.7	21.6	21.7	21.5	22.5	23.5	23.3	23.4						
165	23.9	24.6	24.3	24.4	23.8	22.8	23.2	22.7	23.6	24.5	24.1	24.4						
170	25.1	25.5	25.0	25.3	24.9	23.9	24.9	24.1	24.7	25.4	25.0	25.4						
175	26.4	26.1	25.7	26.1	25.8	25.1	26.5	25.5	25.7	26.3	25.9	26.0						
180	27.3	26.4	26.3	26.8	26.4	26.1	27.3	26.4	26.3	26.8	26.4	26.0						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-08-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: 聚鑫德源 AI40D2C-421000
源磊A+ 13S5P/13S10P
E款 0:10