


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:121.1V I:0.2430A P:29.00W PF:0.9830 Lamp Flux:3894.69x1 lm					
NAME: 二代线条灯		TYPE:白色外壳		WEIGHT:	
DIM.: 4FT		SPEC.:3500K		SERIAL No.:认证样品	
MFR.: YQ		SUR.:		PROTECTION ANGLE:	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 134.30 lm/W			
MODEL		I _{max} (cd)	1382	S/MH(C0/180)	1.25
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	122	TOTAL FLUX(lm)	3894.7	η UP,DN(C0-180)	0.0,51.0
NOMINAL FLUX(lm)	3894.69	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,48.9
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	121.1	η down(%)	99.9	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

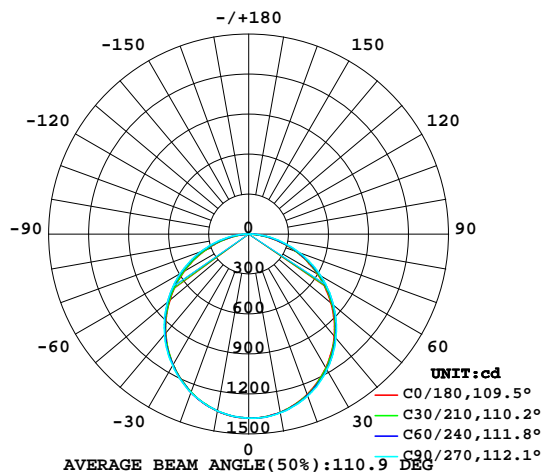

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

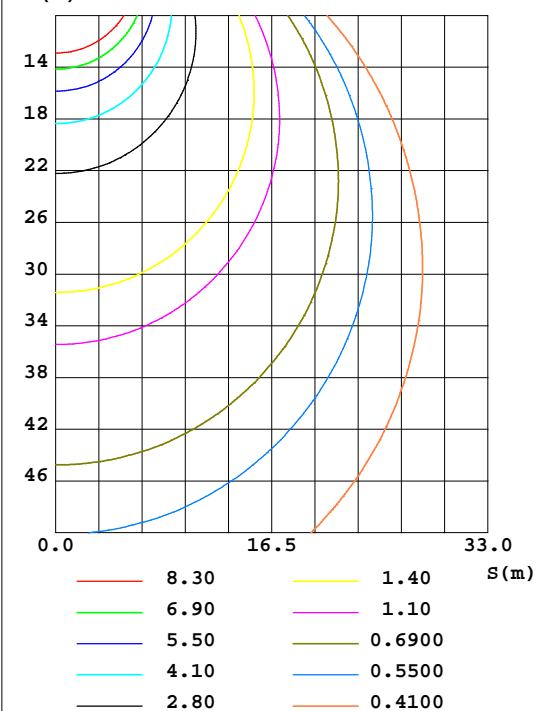


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-10-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: E款 0:10
单下发光
源磊A+档

ZONAL FLUX DIAGRAM AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum, lamp
10	1358	1360	1362	1360	1349	1348	1348	1348	0- 10	130.5	130.5	3.35,3.35
20	1280	1287	1293	1287	1265	1264	1266	1266	10- 20	372.7	503.2	12.9,12.9
30	1159	1167	1175	1167	1133	1135	1142	1139	20- 30	561.6	1065	27.3,27.3
40	1000	1010	1018	1011	970.0	974.7	983.8	978.6	30- 40	673.5	1738	44.6,44.6
50	806.8	822.5	832.1	823.3	773.8	785.9	797.3	791.4	40- 50	695.9	2434	62.5,62.5
60	594.6	610.5	622.8	611.4	558.7	577.0	593.4	583.6	50- 60	627.0	3061	78.6,78.6
70	371.4	385.7	402.4	387.1	337.9	357.3	377.9	364.7	60- 70	478.9	3540	90.9,90.9
80	158.1	168.6	187.1	169.1	124.1	145.3	172.0	153.1	70- 80	279.4	3819	98.1,98.1
90	4.769	3.607	3.998	3.251	0.2942	0.6100	0.8177	0.9535	80- 90	72.78	3892	99.9,99.9
100	0.2247	0.2246	0.2122	0.2141	0.2643	0.3168	0.2752	0.3234	90-100	0.4264	3893	99.9,99.9
110	0.2465	0.2628	0.2581	0.2571	0.2733	0.3030	0.3020	0.3103	100-110	0.2829	3893	100,100
120	0.3000	0.3201	0.3288	0.3191	0.3211	0.3488	0.3459	0.3488	110-120	0.3003	3893	100,100
130	0.3574	0.3765	0.3938	0.3736	0.3919	0.4024	0.4109	0.3995	120-130	0.3226	3894	100,100
140	0.4070	0.4215	0.4435	0.4195	0.4453	0.4491	0.4644	0.4453	130-140	0.3198	3894	100,100
150	0.4644	0.4750	0.4950	0.4740	0.4836	0.4912	0.5083	0.4883	140-150	0.2867	3894	100,100
160	0.5541	0.5590	0.5620	0.5523	0.5812	0.5590	0.5771	0.5724	150-160	0.2388	3894	100,100
170	0.6612	0.6632	0.6499	0.6651	0.6957	0.6517	0.6517	0.6624	160-170	0.1727	3895	100,100
180	0.6556	0.6364	0.6364	0.6479	0.6536	0.6364	0.6326	0.6498	170-180	0.0627	3895	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

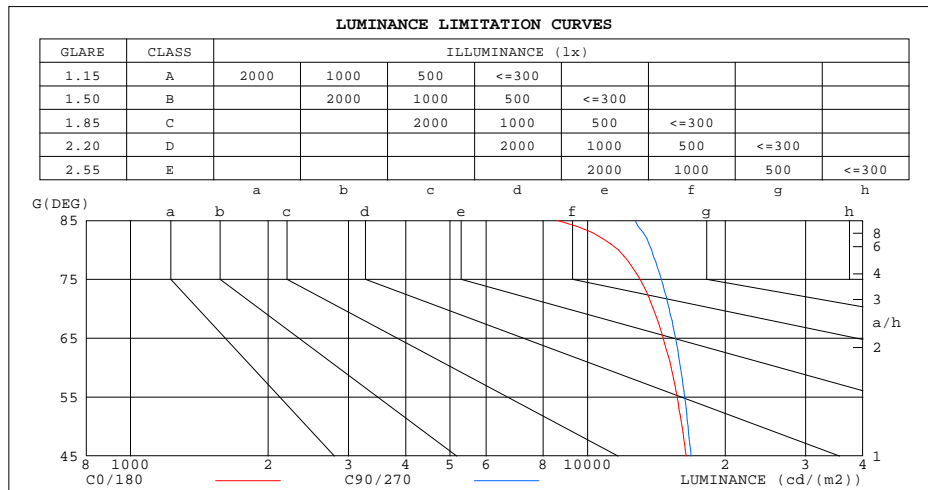

LUMINANCE cd/(m ²)		
G(°)	C0/180	C90/270
85	8592	12692
80	11675	13815
75	13023	14490
70	13923	15085
65	14632	15577
60	15245	15968
55	15704	16298
50	16092	16595
45	16449	16835


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 26.3DEG
 Operators: Ethan
 Test Date: 2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity: 36%
 Test Distance: 6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光
 源磊A+档

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:121.1V I:0.2430A P:29.00W PF:0.9830 Lamp Flux:3894.69x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:3500K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)										
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00	
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.88	.86	.84	
2.0	.90	.84	.78	.88	.82	.77	.85	.80	.75	.82	.77	.73	.79	.75	.72	.69	
3.0	.79	.71	.65	.78	.70	.64	.75	.68	.63	.72	.66	.62	.69	.65	.61	.58	
4.0	.70	.61	.55	.69	.61	.54	.66	.59	.53	.64	.58	.53	.62	.56	.52	.50	
5.0	.63	.54	.47	.62	.53	.47	.59	.52	.46	.57	.51	.46	.56	.50	.45	.43	
6.0	.56	.47	.41	.55	.47	.41	.54	.46	.40	.52	.45	.40	.50	.44	.40	.38	
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.41	.35	.46	.40	.35	.33	
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.32	.30	
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.28	.27	
10.0	.40	.32	.26	.39	.31	.26	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24	

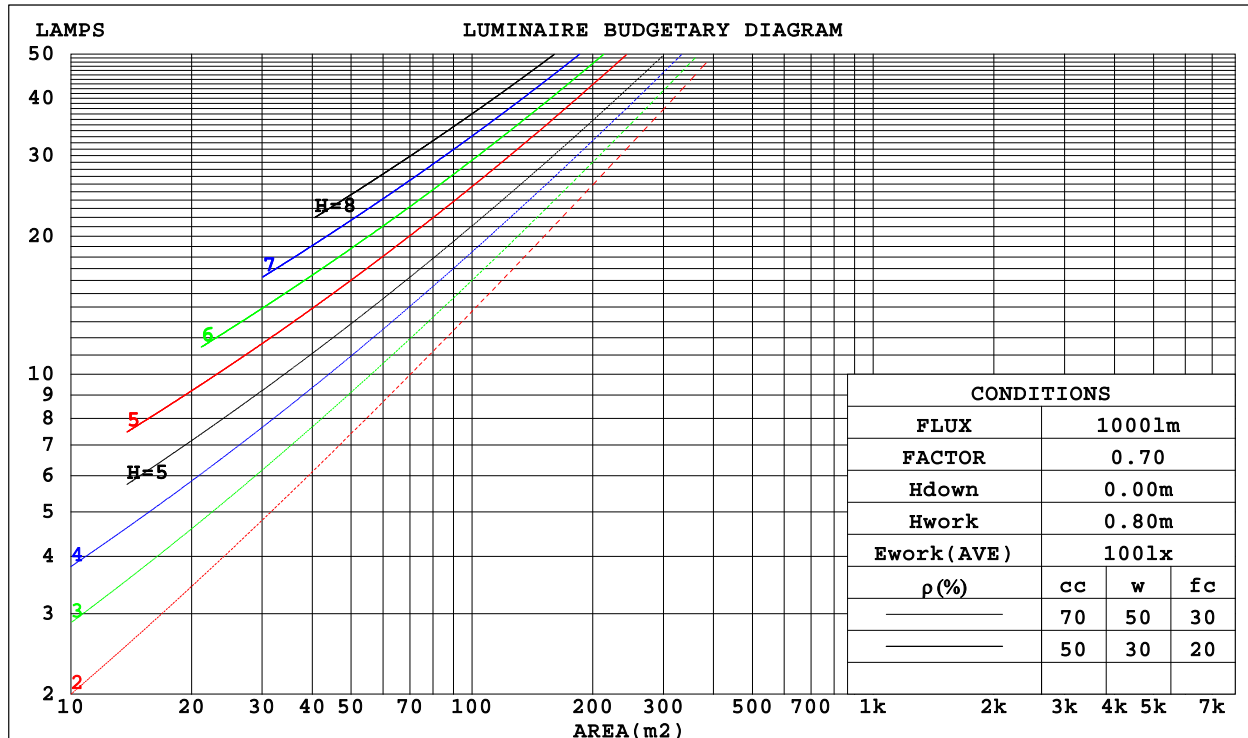

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 26.3DEG
 Operators: Ethan
 Test Date: 2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity: 36%
 Test Distance: 6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光
 源磊A+档

WEC AND CCEC

Test:U:121.1V I:0.2430A P:29.00W PF:0.9830 Lamp Flux:3894.69x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:3500K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.310	.176	.056	.303	.173	.055	.290	.166	.053	.278	.160	.051	.266	.154	.050	
2.0	.292	.160	.049	.286	.157	.048	.274	.152	.047	.263	.148	.046	.253	.143	.045	
3.0	.270	.144	.043	.265	.142	.043	.254	.138	.042	.245	.134	.041	.236	.131	.040	
4.0	.249	.130	.038	.244	.128	.038	.235	.125	.037	.227	.122	.037	.219	.119	.036	
5.0	.230	.117	.034	.226	.116	.034	.218	.113	.033	.210	.111	.033	.203	.109	.033	
6.0	.214	.107	.031	.210	.106	.030	.203	.104	.030	.196	.102	.030	.189	.100	.030	
7.0	.199	.098	.028	.195	.097	.028	.189	.095	.028	.183	.094	.027	.177	.092	.027	
8.0	.186	.091	.026	.183	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025	
9.0	.174	.084	.023	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.164	.078	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.148	.074	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)															
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.181	.157	.135	.155	.134	.116	.106	.092	.080	.061	.054	.047	.020	.017	.015	
2.0	.173	.132	.098	.148	.114	.085	.101	.079	.059	.058	.046	.035	.019	.015	.011	
3.0	.165	.115	.075	.141	.099	.065	.097	.069	.045	.056	.040	.027	.018	.013	.009	
4.0	.157	.101	.059	.135	.088	.051	.093	.061	.036	.054	.036	.021	.017	.012	.007	
5.0	.150	.091	.048	.129	.079	.041	.089	.055	.029	.051	.032	.017	.017	.011	.006	
6.0	.143	.083	.040	.123	.072	.035	.085	.050	.024	.049	.029	.015	.016	.010	.005	
7.0	.136	.076	.034	.117	.066	.029	.081	.046	.021	.047	.027	.012	.015	.009	.004	
8.0	.129	.070	.029	.111	.061	.025	.077	.043	.018	.045	.025	.011	.015	.008	.004	
9.0	.123	.065	.026	.106	.056	.022	.074	.040	.016	.043	.023	.009	.014	.008	.003	
10.0	.118	.061	.023	.101	.053	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-10-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: E款 0:10
单下发光
源磊A+档

Uncorrected UGR Table

Test:U:121.1V I:0.2430A P:29.00W PF:0.9830 Lamp Flux:3894.69x1 lm											
NAME: 二代线条灯					TYPE:白色外壳			WEIGHT:			
DIM.: 4FT					SPEC.:3500K			SERIAL No.:认证样品			
MFR.: YQ					SUR.:			PROTECTION ANGLE:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.5	24.0	22.8	24.2	24.4	22.7	24.2	22.9	24.4	24.6	
	3H	24.0	25.4	24.3	25.6	25.9	24.3	25.7	24.6	25.9	26.2
	4H	24.6	26.0	24.9	26.2	26.5	24.9	26.3	25.3	26.5	26.8
	6H	25.1	26.3	25.4	26.6	26.9	25.5	26.7	25.8	27.0	27.3
	8H	25.2	26.4	25.5	26.7	27.0	25.7	26.9	26.0	27.2	27.4
	12H	25.2	26.4	25.6	26.7	27.0	25.8	26.9	26.1	27.2	27.6
4H	2H	23.1	24.5	23.4	24.7	25.0	23.3	24.6	23.6	24.9	25.1
	3H	24.8	26.0	25.2	26.3	26.6	25.1	26.2	25.4	26.5	26.8
	4H	25.6	26.6	26.0	27.0	27.3	25.9	26.9	26.2	27.3	27.6
	6H	26.1	27.1	26.5	27.4	27.8	26.5	27.5	26.9	27.8	28.2
	8H	26.3	27.2	26.7	27.6	28.0	26.8	27.6	27.2	28.0	28.4
	12H	26.4	27.2	26.9	27.6	28.0	26.9	27.8	27.4	28.1	28.5
8H	4H	25.9	26.8	26.3	27.1	27.5	26.1	27.0	26.5	27.4	27.8
	6H	26.6	27.3	27.0	27.7	28.2	26.9	27.7	27.4	28.1	28.5
	8H	26.9	27.5	27.3	27.9	28.4	27.3	27.9	27.7	28.3	28.8
	12H	27.0	27.6	27.5	28.0	28.5	27.5	28.1	28.0	28.5	29.0
12H	4H	25.9	26.7	26.3	27.1	27.5	26.1	27.0	26.6	27.3	27.7
	6H	26.7	27.3	27.1	27.7	28.2	27.0	27.6	27.5	28.1	28.5
	8H	27.0	27.5	27.4	28.0	28.5	27.4	27.9	27.8	28.4	28.9
Variations with the observer position at spacings:											
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.2 / - 0.3					+ 0.1 / - 0.3					

CIE Pub.117 Corrected 3895 lm Total Lamp Luminous Flux.(8log(F/F0) = 4.7)

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光
 源磊A+档

UTILIZATION FACTORS TABLE

Test:U:121.1V I:0.2430A P:29.00W PF:0.9830 Lamp Flux:3894.69x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:3500K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	58	46	39	57	46	39	56	45	39	32
0.80	68	56	49	67	56	48	65	55	48	41
1.00	76	65	57	75	64	57	72	66	57	50
1.25	83	73	65	82	72	65	79	70	64	57
1.50	88	78	71	86	77	71	83	75	70	62
2.00	95	86	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	87	78
4.00	106	100	96	104	99	94	100	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光
 源磊A+档

ISOCANDELA DIAGRAM

Test:U:121.1V I:0.2430A P:29.00W PF:0.9830 Lamp Flux:3894.69x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:3500K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

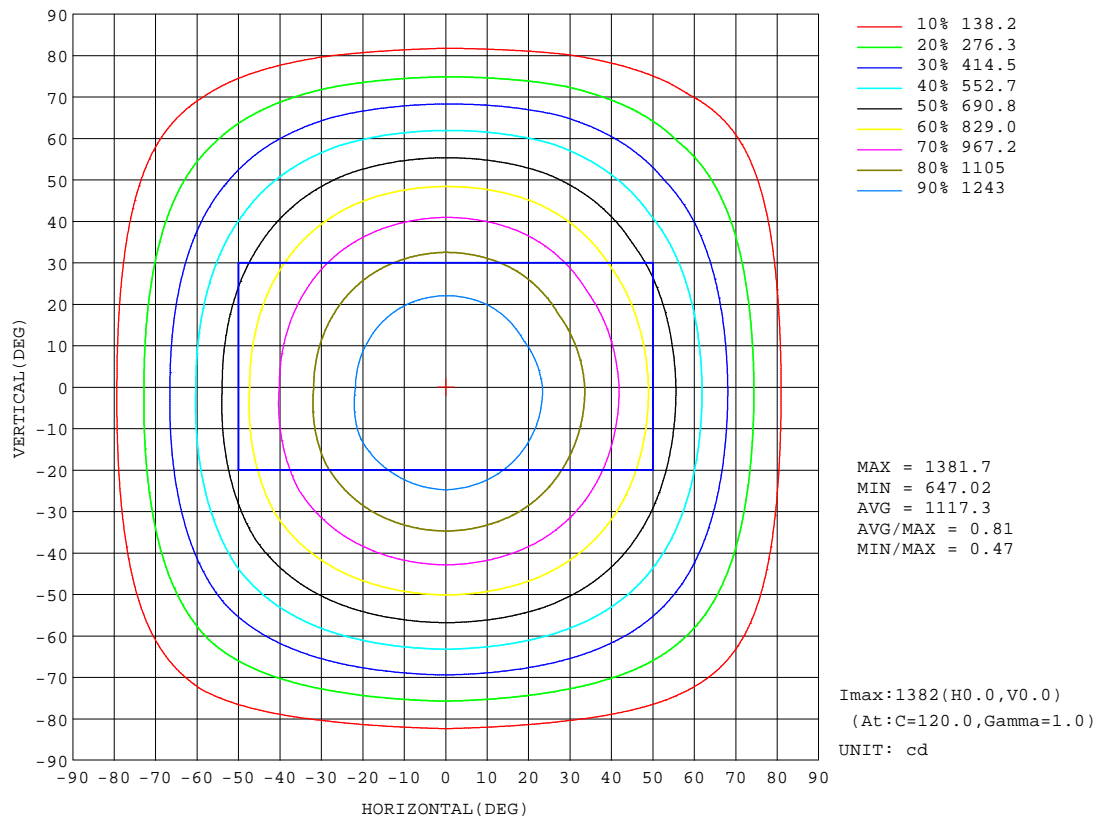


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: E款 0:10
单下发光
源磊A+档

AAI Figure

Test:U:121.1V I:0.2430A P:29.00W PF:0.9830 Lamp Flux:3894.69x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:3500K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

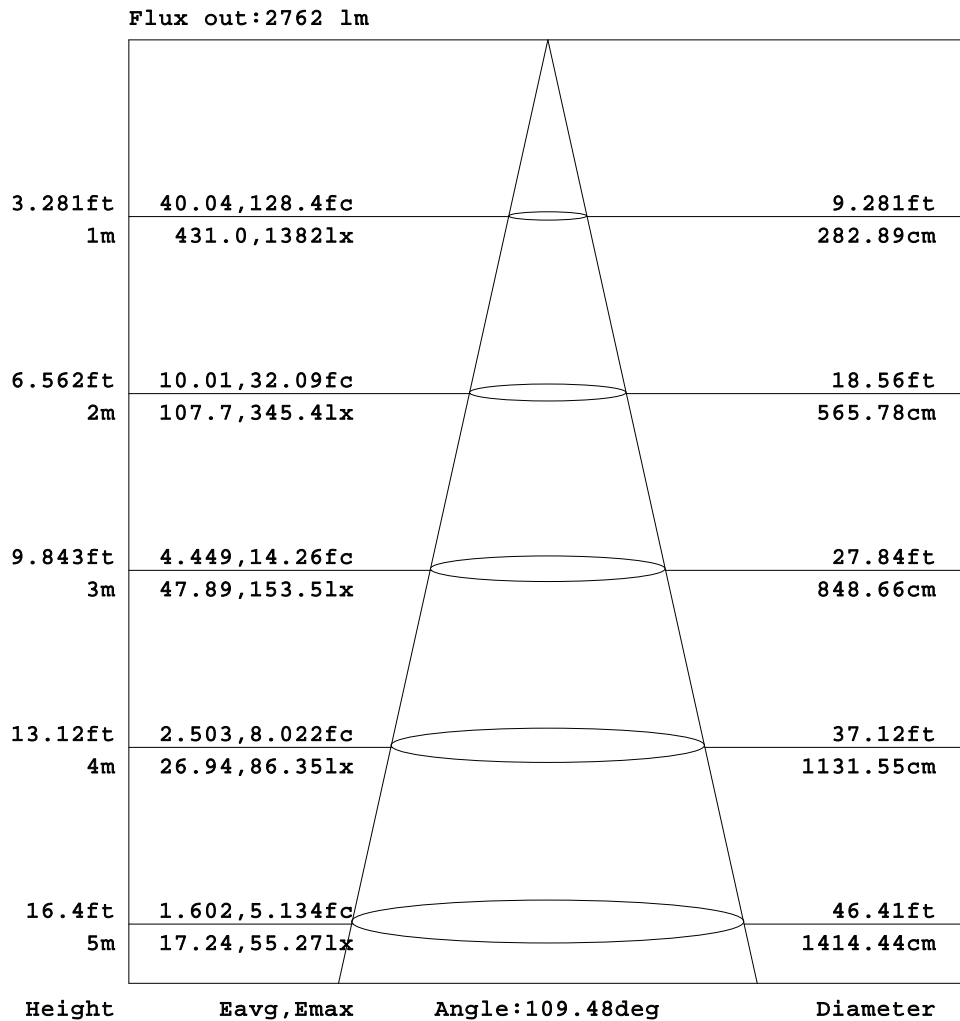


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-10-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: E款 0:10
单下发光
源磊A+档

ISOLUX DIAGRAM


Test:U:121.1V I:0.2430A P:29.00W PF:0.9830 Lamp Flux:3894.69x1 lm		
NAME: 二代线条灯	TYPE: 白色外壳	WEIGHT:
DIM.: 4FT	SPEC.: 3500K	SERIAL No.: 认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

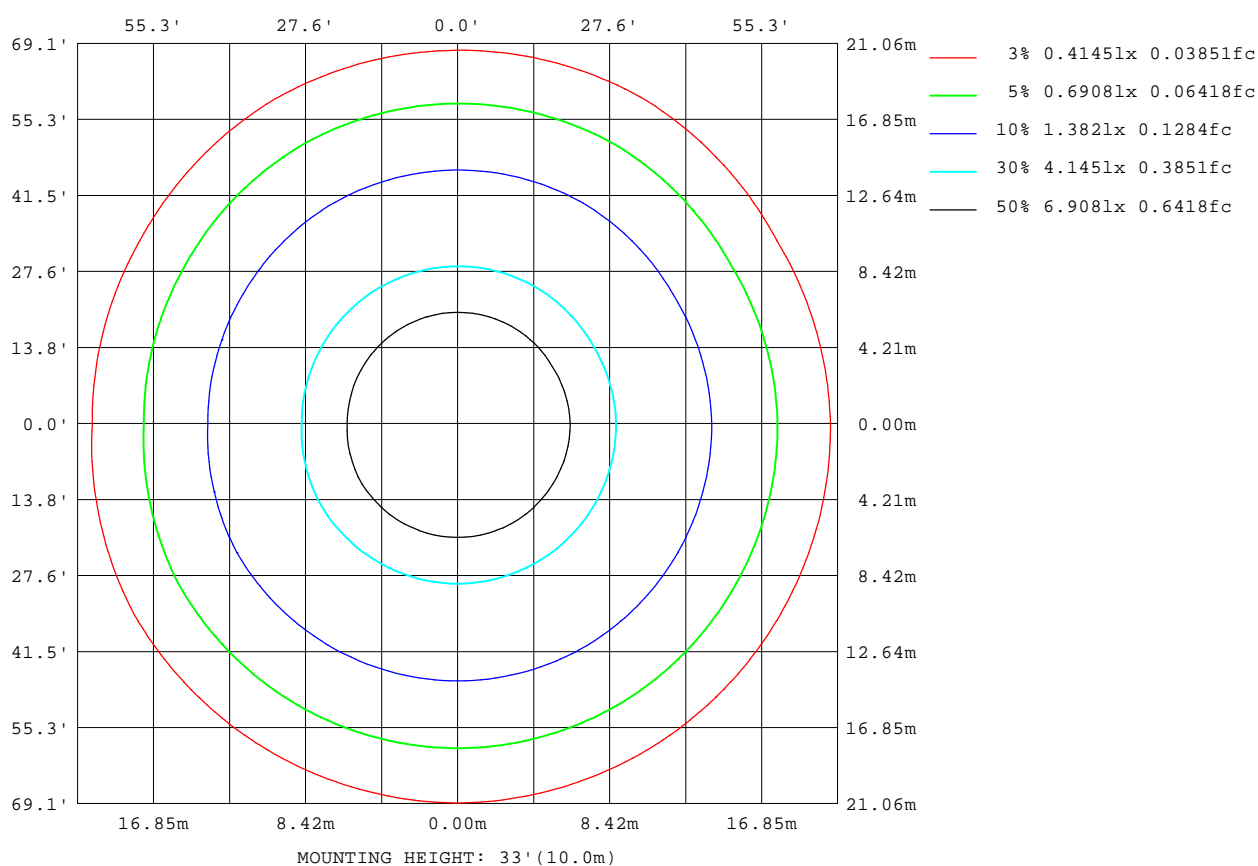

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: E款 0:10
单下发光
源磊A+档

Planar Illuminance Curve

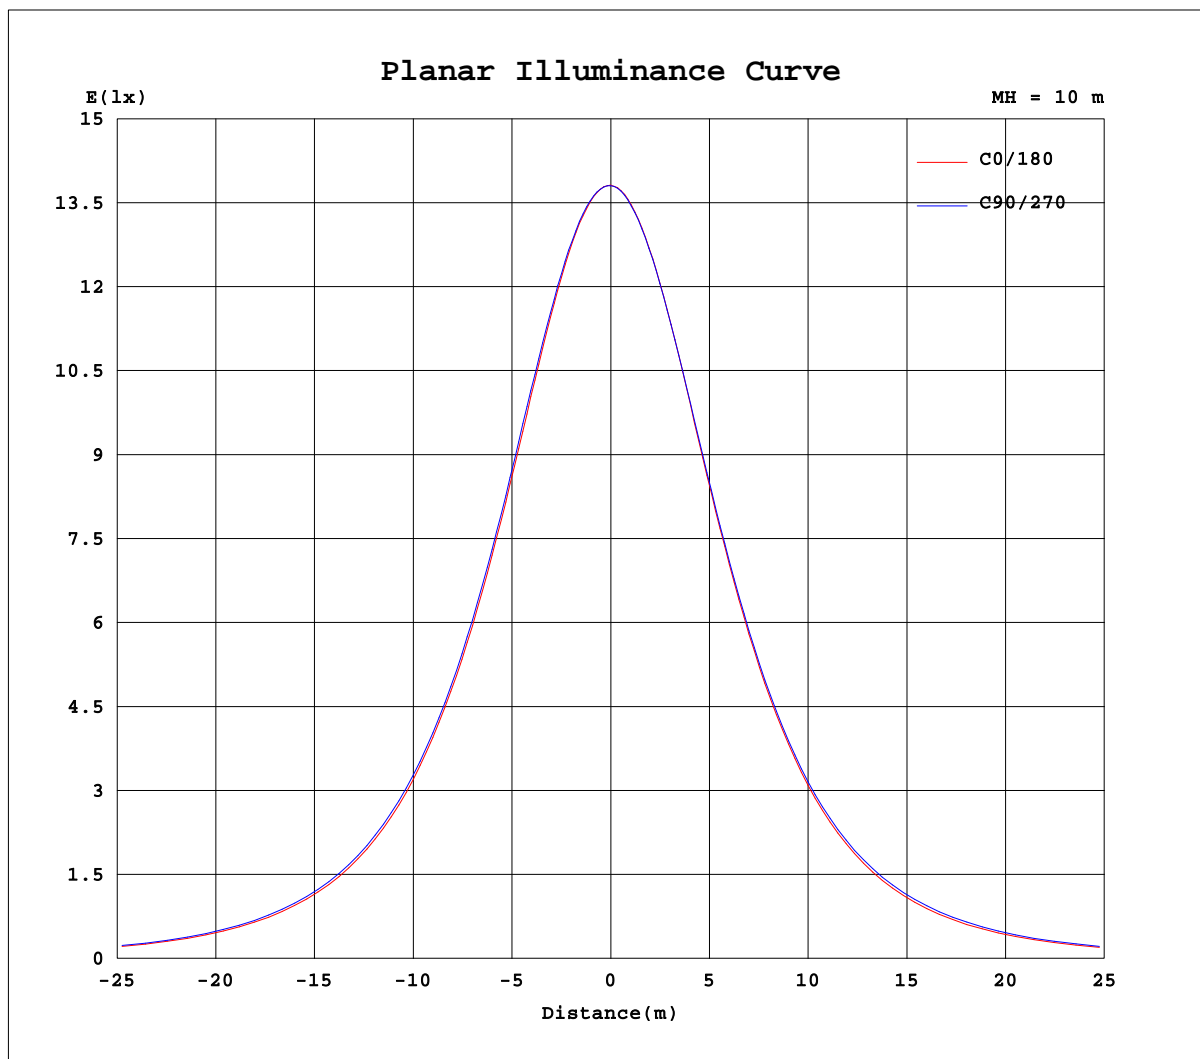

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: E款 0:10
单下发光
源磊A+档

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:121.1V I:0.2430A P:29.00W PF:0.9830 Lamp Flux:3894.69x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:3500K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

C(DEC) γ (DEC)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1382	1381	1381	1381	1381	1381	1382	1381	1381	1381	1381	1381						
5	1377	1377	1378	1378	1377	1377	1372	1371	1371	1371	1372	1371						
10	1358	1360	1361	1362	1361	1359	1349	1348	1348	1348	1349	1348						
15	1325	1328	1332	1334	1331	1329	1313	1311	1313	1312	1315	1311						
20	1280	1285	1290	1293	1288	1285	1265	1262	1266	1266	1269	1263						
25	1224	1227	1236	1241	1236	1228	1202	1203	1205	1209	1208	1205						
30	1159	1162	1173	1175	1171	1163	1133	1133	1137	1142	1142	1136						
35	1083	1088	1098	1101	1097	1089	1055	1056	1061	1067	1066	1058						
40	1000	1006	1015	1018	1014	1008	970	971	978	984	983	974						
45	907	917	924	929	923	919	875	879	889	893	894	884						
50	807	817	828	832	826	820	774	778	794	797	799	784						
55	703	711	726	729	724	715	668	674	693	697	699	680						
60	595	603	618	623	617	605	559	566	588	593	595	572						
65	482	492	504	513	505	494	448	454	480	485	489	460						
70	371	380	391	402	392	382	338	344	370	378	379	350						
75	263	270	280	293	281	271	229	236	262	273	271	242						
80	158	164	173	187	173	165	124	132	158	172	168	139						
85	58.4	62.5	75.1	86.3	74.7	63.7	28.9	36.1	59.3	75.7	68.5	42.0						
90	4.77	4.22	2.99	4.00	2.44	4.06	0.29	0.42	0.80	0.82	1.43	0.48						
95	0.22	0.22	0.23	0.22	0.22	0.21	0.27	0.34	0.36	0.28	0.35	0.36						
100	0.22	0.22	0.23	0.21	0.22	0.21	0.26	0.31	0.32	0.28	0.32	0.33						
105	0.23	0.24	0.25	0.23	0.24	0.23	0.26	0.30	0.32	0.28	0.31	0.32						
110	0.25	0.26	0.27	0.26	0.26	0.25	0.27	0.30	0.31	0.30	0.30	0.32						
115	0.27	0.28	0.30	0.29	0.29	0.28	0.29	0.31	0.33	0.32	0.33	0.32						
120	0.30	0.32	0.32	0.33	0.33	0.31	0.32	0.33	0.36	0.35	0.35	0.35						
125	0.33	0.35	0.35	0.36	0.35	0.34	0.35	0.37	0.39	0.38	0.38	0.38						
130	0.36	0.37	0.38	0.39	0.38	0.37	0.39	0.39	0.41	0.41	0.39	0.41						
135	0.38	0.40	0.40	0.42	0.40	0.40	0.43	0.42	0.44	0.44	0.42	0.43						
140	0.41	0.42	0.42	0.44	0.42	0.42	0.45	0.44	0.45	0.46	0.45	0.45						
145	0.43	0.45	0.45	0.47	0.45	0.44	0.45	0.46	0.47	0.48	0.46	0.46						
150	0.46	0.48	0.47	0.50	0.48	0.47	0.48	0.49	0.50	0.51	0.49	0.49						
155	0.49	0.51	0.51	0.52	0.51	0.50	0.52	0.51	0.53	0.54	0.52	0.52						
160	0.55	0.57	0.55	0.56	0.56	0.55	0.58	0.55	0.57	0.58	0.57	0.58						
165	0.61	0.63	0.60	0.60	0.60	0.61	0.64	0.60	0.61	0.62	0.62	0.63						
170	0.66	0.68	0.64	0.65	0.66	0.67	0.70	0.66	0.65	0.65	0.66	0.67						
175	0.66	0.68	0.64	0.65	0.66	0.68	0.67	0.64	0.63	0.63	0.63	0.65						
180	0.66	0.64	0.63	0.64	0.64	0.66	0.65	0.64	0.63	0.63	0.64	0.66						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-10-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: E款 0:10
单下发光
源磊A+档