


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:121.0V I:0.3310A P:39.60W PF:0.9900 Lamp Flux:5086.69x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:4000K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 128.45 lm/W			
MODEL		I _{max} (cd)	1803	S/MH(C0/180)	1.25
NOMINAL POWER(W)	40	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	122	TOTAL FLUX(lm)	5086.7	η UP,DN(C0-180)	0.0,50.9
NOMINAL FLUX(lm)	5086.69	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.1
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	121.0	η down(%)	99.9	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

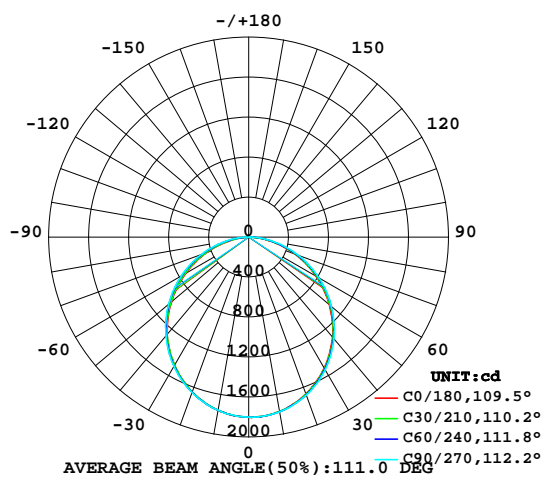

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

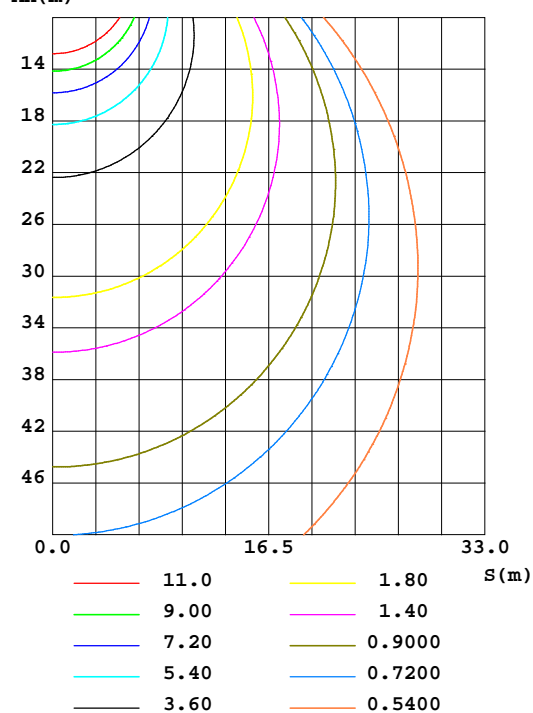


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光 源磊A+

ZONAL FLUX DIAGRAM AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum, lamp
10	1771	1773	1775	1773	1760	1760	1761	1761	0- 10	170.3	170.3	3.35,3.35
20	1671	1677	1683	1676	1650	1652	1656	1654	10- 20	486.3	656.6	12.9,12.9
30	1511	1521	1531	1521	1482	1487	1495	1491	20- 30	733.4	1390	27.3,27.3
40	1306	1316	1326	1316	1271	1277	1289	1283	30- 40	879.9	2270	44.6,44.6
50	1054	1070	1081	1070	1011	1030	1046	1037	40- 50	908.7	3179	62.5,62.5
60	775.9	793.7	808.2	794.7	730.3	756.1	778.6	765.6	50- 60	818.5	3997	78.6,78.6
70	485.8	501.5	522.9	503.0	441.9	468.5	496.9	479.1	60- 70	626.2	4623	90.9,90.9
80	204.7	219.1	243.1	219.2	163.5	190.7	226.2	201.4	70- 80	365.0	4988	98.1,98.1
90	5.984	4.634	5.267	4.157	0.3859	0.8119	1.081	1.283	80- 90	95.26	5084	99.9,99.9
100	0.2848	0.2934	0.2791	0.2790	0.3432	0.4112	0.3555	0.4167	90-100	0.5467	5084	99.9,99.9
110	0.3229	0.3450	0.3441	0.3392	0.3556	0.3954	0.3918	0.4061	100-110	0.3697	5084	100,100
120	0.3917	0.4243	0.4339	0.4185	0.4187	0.4539	0.4491	0.4530	110-120	0.3929	5085	100,100
130	0.4682	0.4950	0.5180	0.4921	0.5066	0.5294	0.5331	0.5199	120-130	0.4219	5085	100,100
140	0.5313	0.5523	0.5811	0.5533	0.5791	0.5820	0.6039	0.5782	130-140	0.4180	5086	100,100
150	0.6039	0.6231	0.6461	0.6202	0.6289	0.6403	0.6613	0.6384	140-150	0.3747	5086	100,100
160	0.7280	0.7339	0.7397	0.7244	0.7591	0.7282	0.7549	0.7473	150-160	0.3126	5086	100,100
170	0.8657	0.8705	0.8425	0.8624	0.9136	0.8533	0.8524	0.8650	160-170	0.2260	5087	100,100
180	0.8524	0.8333	0.8333	0.8457	0.8543	0.8343	0.8314	0.8457	170-180	0.0822	5087	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

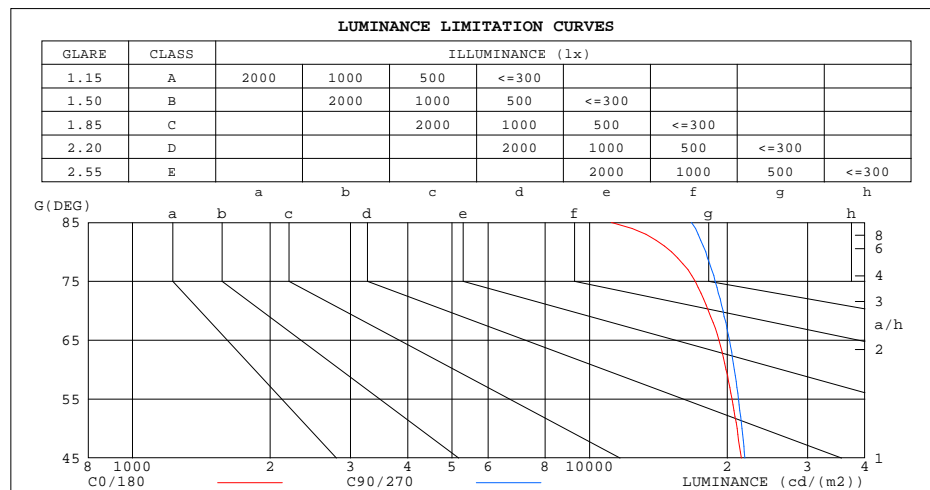

LUMINANCE cd/(m2)		
G(°)	C0/180	C90/270
85	11165	16693
80	15112	17951
75	17026	18823
70	18210	19602
65	19180	20228
60	19895	20723
55	20496	21171
50	21023	21553
45	21475	21877


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 26.3DEG
 Operators: Ethan
 Test Date: 2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity: 36%
 Test Distance: 6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光 源磊A+

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:121.0V I:0.3310A P:39.60W PF:0.9900 Lamp Flux:5086.69x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:4000K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)										
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00	
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.88	.86	.84	
2.0	.90	.84	.78	.88	.82	.77	.85	.80	.75	.82	.77	.73	.79	.75	.72	.69	
3.0	.79	.71	.65	.78	.70	.64	.75	.68	.63	.72	.66	.62	.69	.65	.61	.58	
4.0	.70	.61	.55	.69	.61	.54	.66	.59	.53	.64	.58	.53	.62	.56	.52	.50	
5.0	.63	.54	.47	.62	.53	.47	.59	.52	.46	.57	.51	.46	.56	.50	.45	.43	
6.0	.56	.47	.41	.55	.47	.41	.54	.46	.40	.52	.45	.40	.50	.44	.40	.38	
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.41	.35	.46	.40	.35	.33	
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.32	.30	
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.28	.27	
10.0	.40	.32	.26	.39	.31	.26	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24	

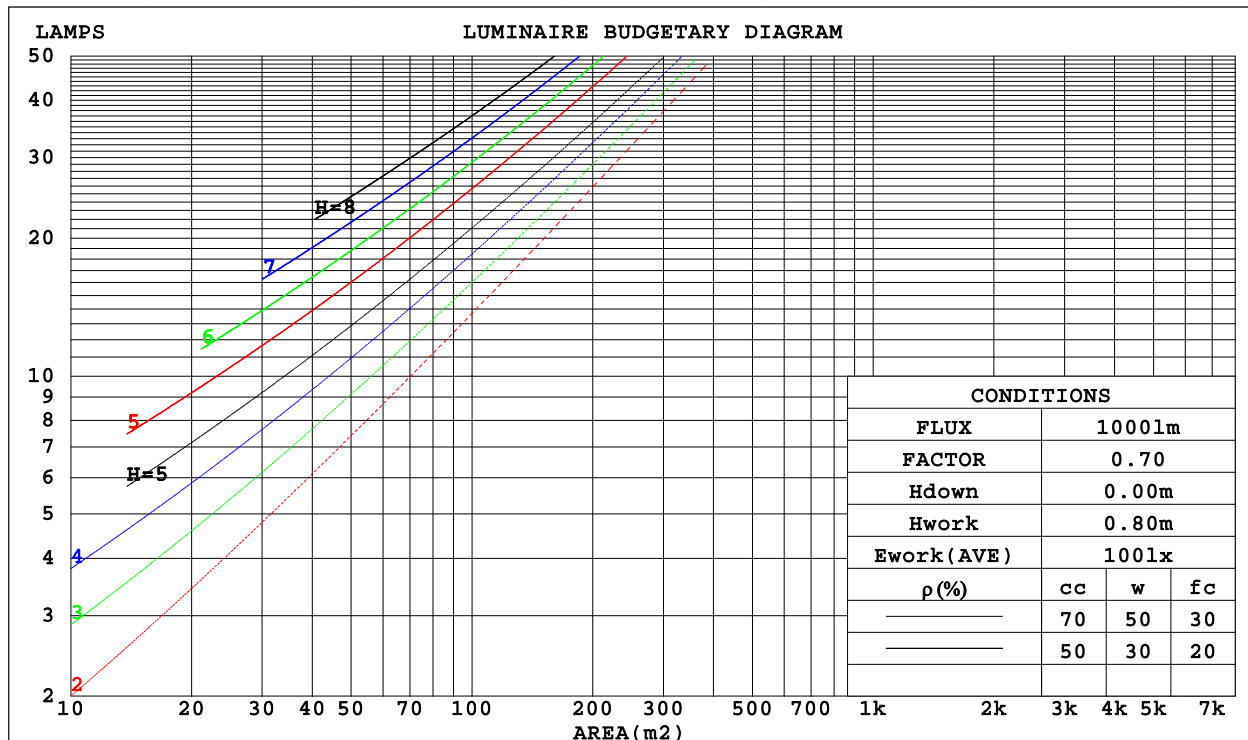

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 26.3DEG
 Operators: Ethan
 Test Date: 2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity: 36%
 Test Distance: 6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光 源磊A+

WEC AND CCEC

Test:U:121.0V I:0.3310A P:39.60W PF:0.9900 Lamp Flux:5086.69x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:4000K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.310	.176	.056	.303	.173	.055	.290	.166	.053	.278	.160	.051	.266	.154	.050	
2.0	.292	.160	.049	.286	.157	.049	.274	.152	.047	.263	.148	.046	.253	.143	.045	
3.0	.270	.144	.043	.265	.142	.043	.254	.138	.042	.245	.134	.041	.236	.131	.040	
4.0	.249	.130	.038	.244	.128	.038	.235	.125	.037	.227	.122	.037	.219	.119	.036	
5.0	.230	.117	.034	.226	.116	.034	.218	.113	.033	.210	.111	.033	.203	.109	.033	
6.0	.214	.107	.031	.210	.106	.031	.203	.104	.030	.196	.102	.030	.189	.100	.030	
7.0	.199	.098	.028	.195	.097	.028	.189	.095	.028	.183	.094	.027	.177	.092	.027	
8.0	.186	.091	.026	.183	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025	
9.0	.174	.084	.023	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.164	.078	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.148	.074	.021	

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.181	.157	.135	.155	.134	.116	.106	.092	.080	.061	.054	.047	.020	.017	.015		
2.0	.173	.132	.098	.148	.114	.085	.101	.079	.059	.058	.046	.035	.019	.015	.011		
3.0	.165	.115	.075	.141	.099	.065	.097	.069	.045	.056	.040	.027	.018	.013	.009		
4.0	.157	.101	.059	.135	.088	.051	.093	.061	.036	.054	.036	.021	.017	.012	.007		
5.0	.150	.091	.048	.129	.079	.041	.089	.055	.029	.051	.032	.017	.017	.011	.006		
6.0	.143	.083	.040	.123	.072	.035	.085	.050	.024	.049	.029	.015	.016	.010	.005		
7.0	.136	.076	.034	.117	.066	.029	.081	.046	.021	.047	.027	.012	.015	.009	.004		
8.0	.129	.070	.029	.111	.061	.025	.077	.043	.018	.045	.025	.011	.015	.008	.004		
9.0	.123	.065	.026	.106	.056	.022	.074	.040	.016	.043	.023	.009	.014	.008	.003		
10.0	.118	.061	.023	.101	.053	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光 源磊A+

Uncorrected UGR Table

Test:U:121.0V I:0.3310A P:39.60W PF:0.9900 Lamp Flux:5086.69x1 lm											
NAME: 二代线条灯					TYPE:白色外壳			WEIGHT:			
DIM.: 4FT					SPEC.:4000K			SERIAL No.:认证样品			
MFR.: YQ					SUR.:			PROTECTION ANGLE:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.4	24.9	23.7	25.1	25.3	23.6	25.1	23.8	25.3	25.5	
	3H	24.9	26.3	25.2	26.6	26.8	25.2	26.6	25.5	26.8	27.0
	4H	25.5	26.9	25.9	27.1	27.4	25.8	27.2	26.2	27.4	27.7
	6H	26.0	27.2	26.3	27.5	27.8	26.4	27.6	26.7	27.9	28.2
	8H	26.1	27.3	26.4	27.6	27.9	26.5	27.8	26.9	28.0	28.3
	12H	26.2	27.3	26.5	27.6	27.9	26.7	27.8	27.0	28.1	28.4
4H	2H	24.0	25.4	24.4	25.6	25.9	24.2	25.5	24.5	25.8	26.0
	3H	25.8	26.9	26.1	27.2	27.5	26.0	27.1	26.3	27.4	27.7
	4H	26.5	27.6	26.9	27.9	28.2	26.8	27.8	27.1	28.1	28.5
	6H	27.1	28.0	27.5	28.4	28.7	27.4	28.4	27.8	28.7	29.1
	8H	27.2	28.1	27.7	28.5	28.9	27.7	28.5	28.1	28.9	29.3
	12H	27.3	28.2	27.8	28.5	28.9	27.8	28.7	28.3	29.0	29.4
8H	4H	26.8	27.7	27.2	28.0	28.4	27.0	27.9	27.4	28.3	28.7
	6H	27.5	28.2	27.9	28.6	29.1	27.8	28.6	28.3	29.0	29.4
	8H	27.8	28.4	28.2	28.8	29.3	28.2	28.8	28.6	29.2	29.7
	12H	27.9	28.5	28.4	28.9	29.4	28.4	29.0	28.9	29.4	29.9
12H	4H	26.8	27.6	27.2	28.0	28.4	27.0	27.8	27.5	28.2	28.6
	6H	27.6	28.2	28.0	28.7	29.1	27.9	28.5	28.3	29.0	29.4
	8H	27.9	28.4	28.4	28.9	29.4	28.3	28.8	28.7	29.3	29.8
Variations with the observer position at spacings:											
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.2 / - 0.3					+ 0.1 / - 0.3					

CIE Pub.117 Corrected 5087 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.7)

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光 源磊A+

UTILIZATION FACTORS TABLE

Test:U:121.0V I:0.3310A P:39.60W PF:0.9900 Lamp Flux:5086.69x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:4000K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	58	46	39	57	46	39	56	45	39	32
0.80	68	56	49	67	55	48	65	55	48	41
1.00	76	65	57	75	64	57	72	66	57	50
1.25	83	73	65	82	72	65	79	70	64	57
1.50	88	78	71	86	77	71	83	75	70	62
2.00	95	86	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	87	78
4.00	106	100	96	104	99	94	100	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光 源磊A+

ISOCANDELA DIAGRAM

Test:U:121.0V I:0.3310A P:39.60W PF:0.9900 Lamp Flux:5086.69x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:4000K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

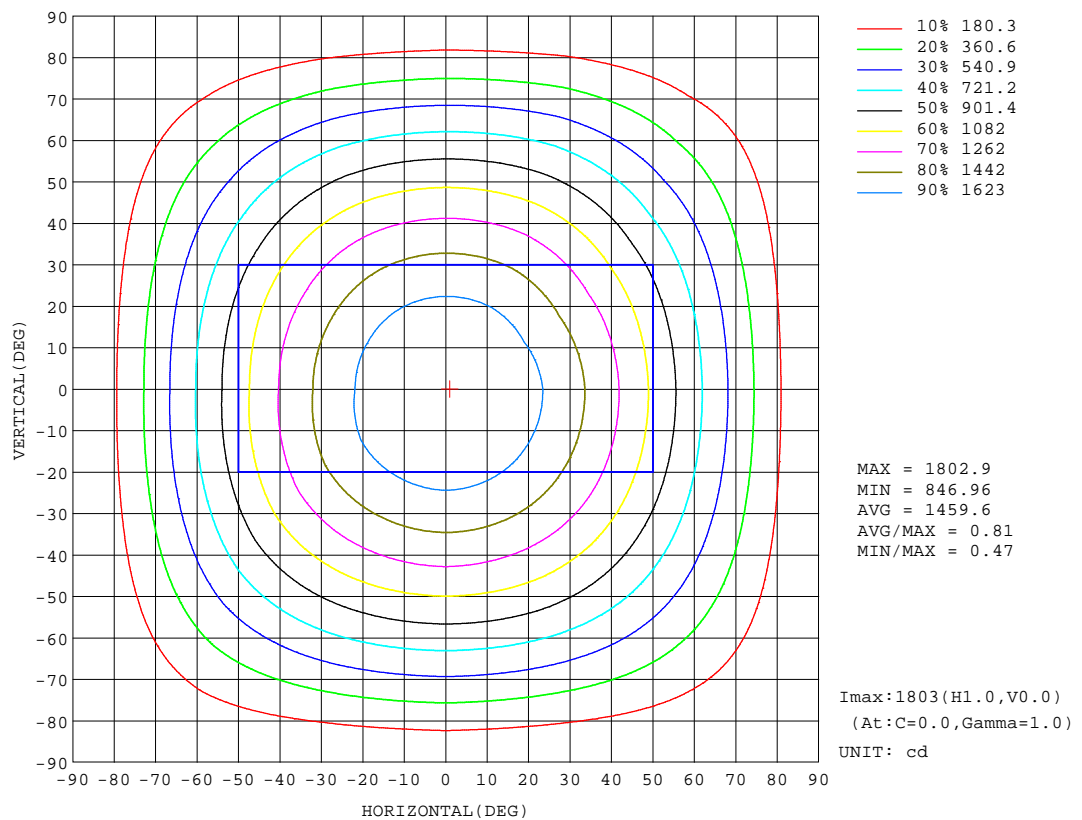


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:26.3DEG
Operators:Ethan
Test Date:2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity:36%
Test Distance:6.770m [K=1.0000]
Remarks: E款 0:10
单下发光 源磊A+

AAI Figure

Test:U:121.0V I:0.3310A P:39.60W PF:0.9900 Lamp Flux:5086.69x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:4000K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

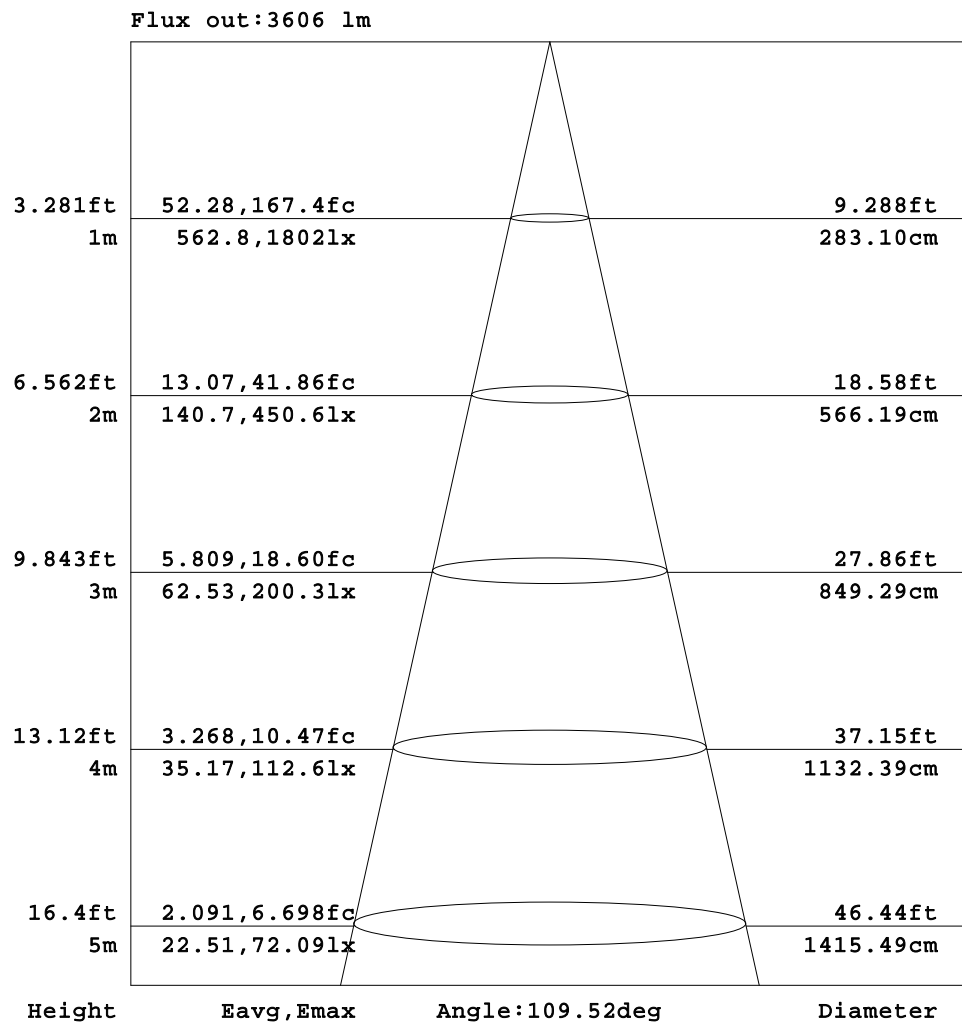


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-10-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: E款 0:10
单下发光 源磊A+

ISOLUX DIAGRAM


Test:U:121.0V I:0.3310A P:39.60W PF:0.9900 Lamp Flux:5086.69x1 lm		
NAME: 二代线条灯	TYPE:白色外壳	WEIGHT:
DIM.: 4FT	SPEC.:4000K	SERIAL No.:认证样品
MFR.: YQ	SUR.:	PROTECTION ANGLE:

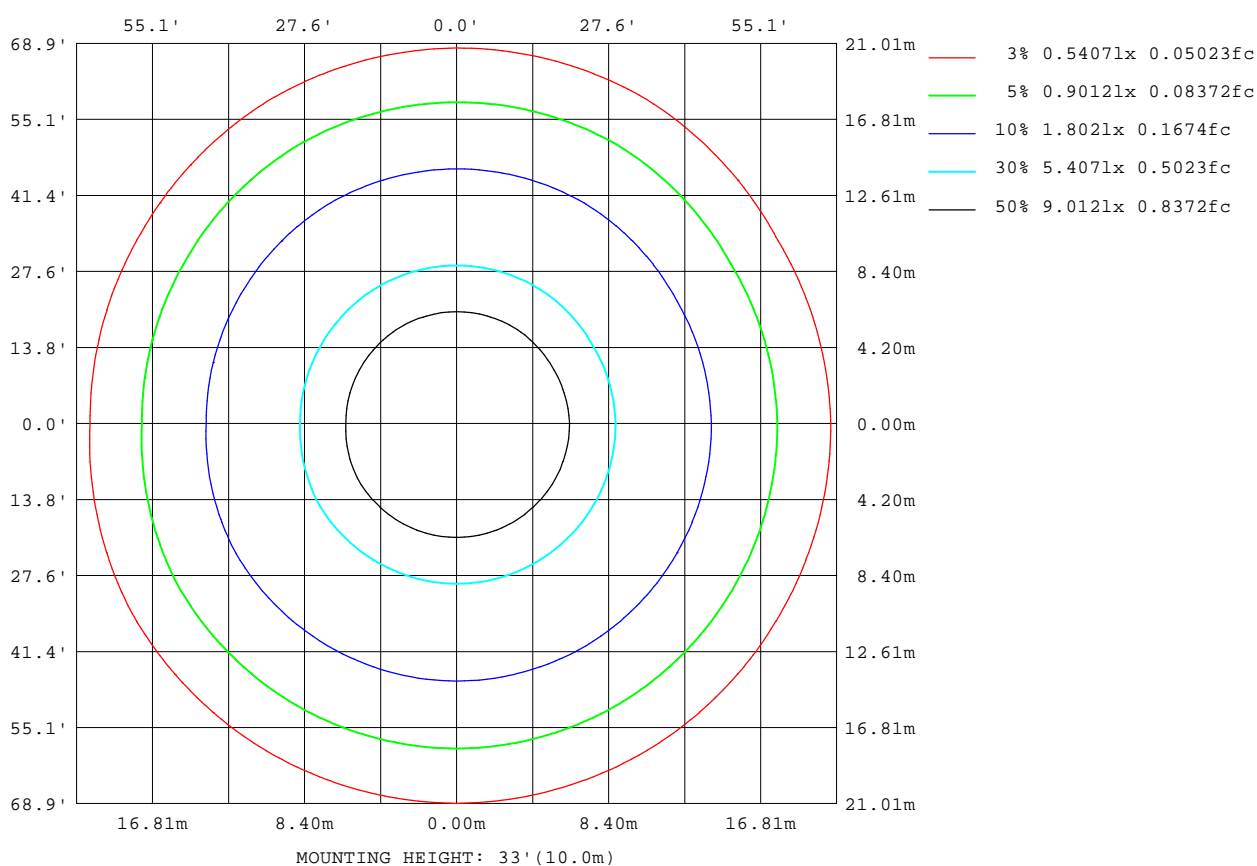

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-10-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: E款 0:10
单下发光 源磊A+

Planar Illuminance Curve

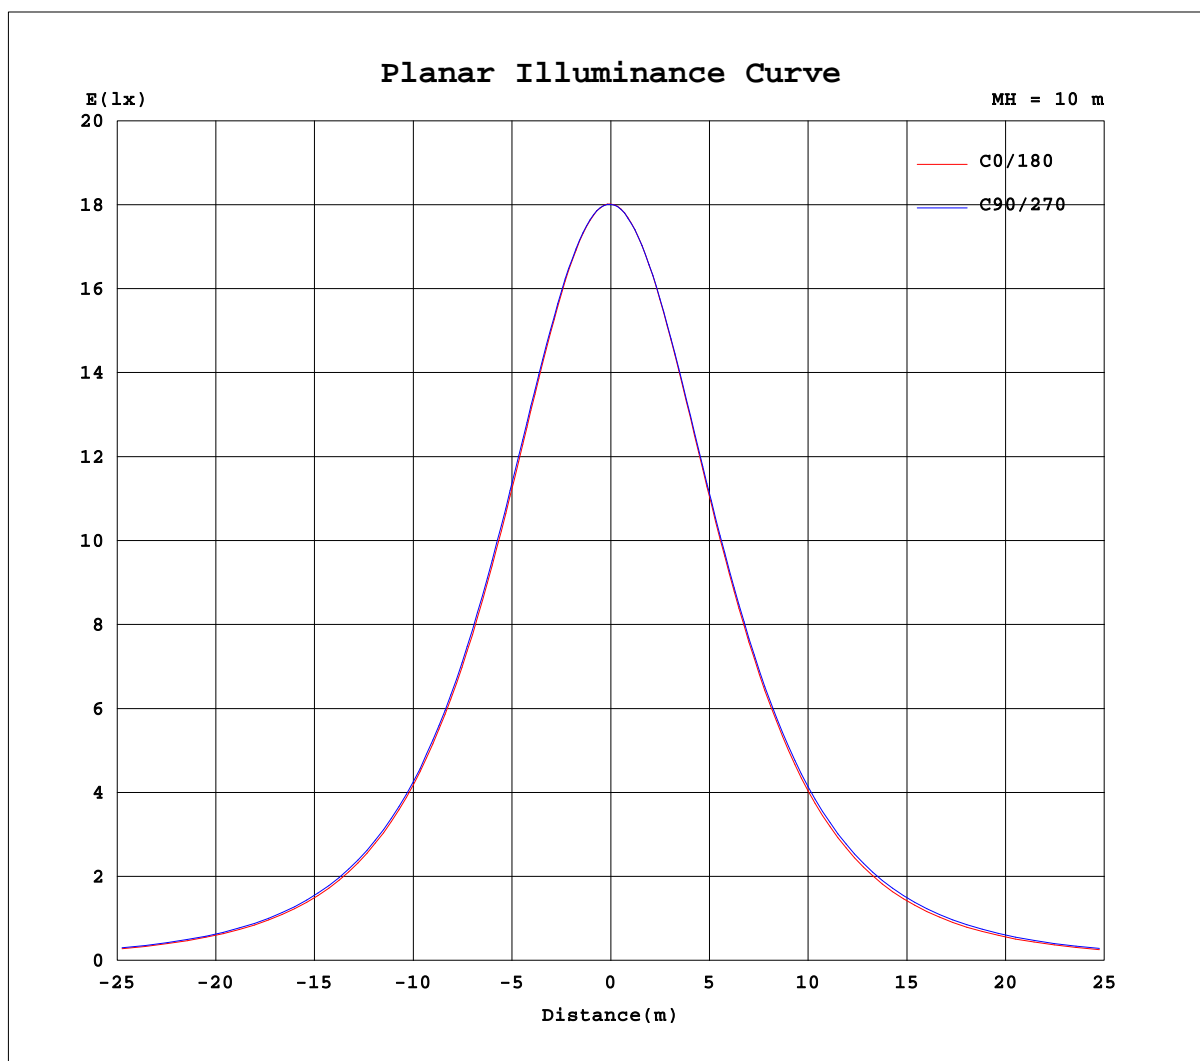

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 26.3DEG
Operators: Ethan
Test Date: 2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.268
Humidity: 36%
Test Distance: 6.770m [K=1.0000]
Remarks: E款 0:10
单下发光 源磊A+

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:121.0V I:0.3310A P:39.60W PF:0.9900 Lamp Flux:5086.69x1 lm					
NAME: 二代线条灯			TYPE:白色外壳		WEIGHT:
DIM.: 4FT			SPEC.:4000K		SERIAL No.:认证样品
MFR.: YQ			SUR.:		PROTECTION ANGLE:

Table--1

UNIT: cd

C(DEC) γ (DEC)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1802	1802	1801	1801	1802	1801	1802	1802	1801	1801	1802	1801						
5	1796	1797	1797	1797	1796	1797	1790	1789	1790	1789	1791	1789						
10	1771	1772	1774	1775	1773	1773	1760	1759	1760	1761	1762	1760						
15	1729	1731	1735	1737	1733	1732	1713	1712	1715	1715	1717	1713						
20	1671	1675	1679	1683	1677	1675	1650	1650	1655	1656	1658	1651						
25	1597	1603	1609	1614	1607	1604	1572	1572	1578	1582	1584	1574						
30	1511	1517	1525	1531	1523	1519	1482	1482	1492	1495	1497	1486						
35	1413	1420	1429	1435	1426	1422	1381	1381	1393	1397	1399	1385						
40	1306	1313	1320	1326	1318	1314	1271	1270	1284	1289	1291	1275						
45	1184	1194	1202	1207	1200	1195	1144	1151	1165	1172	1172	1157						
50	1054	1064	1076	1081	1073	1067	1011	1019	1041	1046	1048	1027						
55	917	926	943	947	940	930	873	882	910	915	917	891						
60	776	784	803	808	802	788	730	741	771	779	782	750						
65	632	640	657	667	659	643	586	598	629	640	641	607						
70	486	495	508	523	509	497	442	451	486	497	499	460						
75	344	351	363	380	364	353	300	310	344	359	357	318						
80	205	213	225	243	224	214	164	174	208	226	220	182						
85	75.9	80.8	97.4	113	95.7	82.2	38.1	48.8	77.8	99.6	90.2	56.6						
90	5.98	5.44	3.83	5.27	3.15	5.16	0.39	0.54	1.09	1.08	1.93	0.64						
95	0.29	0.28	0.30	0.26	0.29	0.27	0.35	0.44	0.46	0.36	0.45	0.47						
100	0.28	0.28	0.30	0.28	0.29	0.27	0.34	0.41	0.42	0.36	0.41	0.43						
105	0.30	0.31	0.33	0.31	0.32	0.30	0.35	0.39	0.41	0.37	0.40	0.41						
110	0.32	0.34	0.35	0.34	0.35	0.33	0.36	0.39	0.40	0.39	0.39	0.42						
115	0.35	0.37	0.39	0.39	0.39	0.37	0.38	0.40	0.44	0.41	0.43	0.42						
120	0.39	0.41	0.43	0.43	0.43	0.41	0.42	0.44	0.47	0.45	0.45	0.45						
125	0.43	0.45	0.47	0.47	0.46	0.45	0.46	0.48	0.51	0.50	0.49	0.49						
130	0.47	0.49	0.50	0.52	0.50	0.48	0.51	0.52	0.54	0.53	0.51	0.53						
135	0.50	0.52	0.53	0.55	0.53	0.52	0.56	0.55	0.57	0.57	0.55	0.56						
140	0.53	0.55	0.55	0.58	0.56	0.55	0.58	0.58	0.58	0.60	0.58	0.58						
145	0.56	0.59	0.59	0.61	0.59	0.58	0.59	0.60	0.61	0.63	0.60	0.60						
150	0.60	0.62	0.62	0.65	0.63	0.61	0.63	0.63	0.65	0.66	0.64	0.64						
155	0.65	0.67	0.66	0.68	0.67	0.65	0.68	0.67	0.69	0.70	0.68	0.68						
160	0.73	0.74	0.73	0.74	0.73	0.72	0.76	0.72	0.74	0.75	0.75	0.75						
165	0.79	0.83	0.79	0.79	0.79	0.79	0.83	0.79	0.80	0.80	0.80	0.83						
170	0.87	0.90	0.84	0.84	0.86	0.87	0.91	0.86	0.85	0.85	0.85	0.88						
175	0.87	0.89	0.85	0.85	0.86	0.89	0.88	0.85	0.83	0.83	0.82	0.84						
180	0.85	0.84	0.83	0.83	0.84	0.85	0.85	0.84	0.83	0.83	0.84	0.85						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:26.3DEG
 Operators:Ethan
 Test Date:2021-10-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.268
 Humidity:36%
 Test Distance:6.770m [K=1.0000]
 Remarks: E款 0:10
 单下发光 源磊A+