

WARNING


PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION

- To prevent personal injury or product damage only licensed electricians should attempt to install
- To avoid electric shock or component damage disconnect power before attempting installation or servicing.
- This product must be installed in accordance with the current National Electric Code (NEC) and all applicable federal, state and local electric codes and safety standards.
- Disconnect product and allow cooling prior to servicing.
- Any alteration or modification of this product is expressly forbidden as it may cause serious personal injury, death, property damage and/or product malfunction.
- To prevent product malfunction and/or electrical shock this product must be properly grounded.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Damp locations Rated


Included Items



LAMP
1 PC



MOUNTING BRACKET
1 PC



SCREW #8-32X0.75"
2 PC




WIRING NUTS
6 PC

Instructions:

1. Make sure that Power is TURNED OFF.
2. Prior to installation, install the mounting plate on the junction box with mounting screws. Drive screws completely to the end of the junction box.
3. Connect supply wires to wires on fixture with wirenuts. Connect white to white, black to black and copper wire to copper wire as grounding connection.
4. Completing the installation by pushing the fixture into the mounting plate.
5. Turn the power back on.

Wiring Diagram

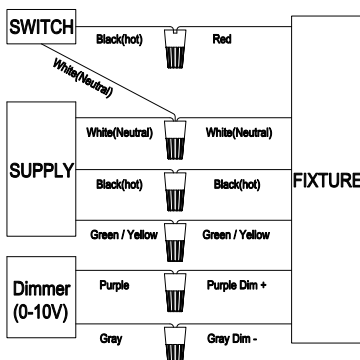

LED indicator colors/functions.

RED: Battery is charging, charge is finished when the indicator light turns off.
GREEN: Battery powered
Minimum charge time 15 hours

