Vista™ Semi-Flush
Installation Instructions

⚠ WARNING

PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION

— To prevent personal injury or product damage only licensed electricians should install.
— To avoid electric shock or component damage disconnect power before attempting installation or servicing.
— This product must be installed in accordance with the National Electrical Code (NEC) and all applicable federal, state and local electrical codes and safety standards.
— Disconnect product and allow cooling prior to servicing.
— Any alteration or modification of this product is expressly forbidden as it may cause serious personal injury, death, property damage and/or product malfunction.
— To prevent product malfunction and/or electrical shock this product must be properly grounded.
— This product must be installed in accordance with the applicable installation code by a Person familiar with the construction and operation of the product and the hazards involved.

Step 1: Disconnect Power

Turn OFF power at the circuit breaker. Verify that the electrical supply is de-energized before proceeding.

Step 2: Install Mounting Bracket

Position the mounting bracket (1) over the ceiling junction box. Secure the bracket using the mounting screws (2). Ensure the bracket is properly aligned and securely fastened.

Step 3: Assemble Fixture Support


Route the fixture wires through the suspension rod (3). Connect the suspension rod to the lamp holder assembly (4), ensuring the threaded connection is securely tightened. Position the ceiling canopy (15) over the suspension rod.

Step 4: Connect Electrical Wiring

Support the fixture while making electrical connections. Using the provided wire connectors (14), connect the fixture conductors to the corresponding supply conductors:

Black (Line/Hot): Connect to the supply line conductor.
White (Neutral): Connect to the supply neutral conductor.
Green/Bare (Ground): Connect to the supply grounding conductor.

Ensure all connections are secure and properly insulated.

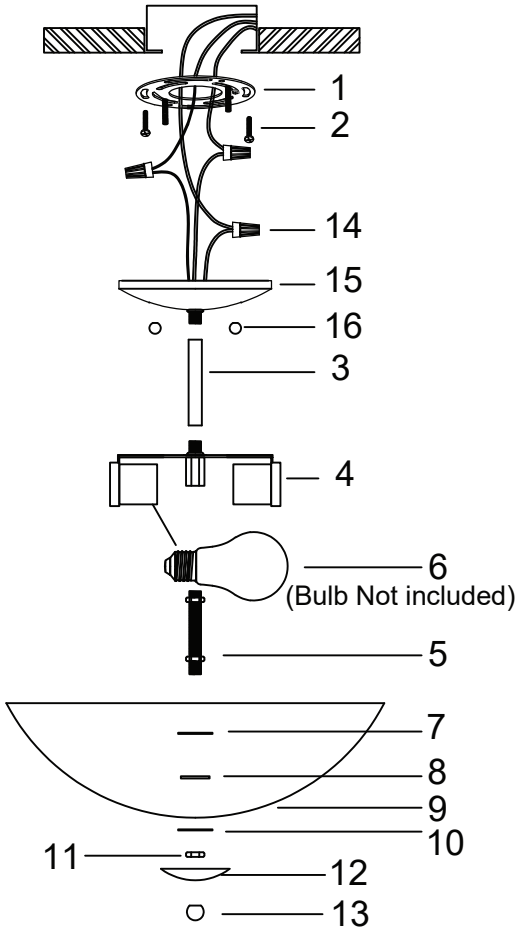

Step 5: Secure Ceiling Canopy

Carefully position the wiring inside the junction box. Raise the ceiling canopy (15) against the ceiling and secure it using the canopy securing nuts (16). Ensure the canopy is flush against the ceiling and that no wires are pinched.

Step 6: Install Light Bulb

Install a compatible light bulb (6) into the lamp holder assembly (4). Do not exceed the fixture's maximum rated wattage.

Step 7: Install Glass Shade

Attach the threaded support rod (5) to the lamp holder assembly (4). Position the upper shade washer (7) and upper shade gasket (8) onto the support rod. Carefully raise the glass shade (9) into position, aligning its center opening with the threaded support rod.

Step 8: Secure Glass Shade

nstall the lower shade gasket (10) and retaining nut (11) onto the threaded support rod (5). Tighten the retaining nut until the glass shade is securely supported. Do not overtighten, as excessive pressure may damage the glass.

Step 9: Install Decorative Bottom Cap

Position the decorative bottom cap (12) over the retaining nut (11). Secure the assembly using the decorative finial (13). Hand-tighten until secure.

Step 10: Restore Power and Test

Restore power at the circuit breaker. Turn ON the fixture and verify proper operation.