

Date:	
Project Name:	
SKU #:	

**Double Ring Round Fixture**  
Flush Mounted Ceiling Light



**APPLICATIONS**

Residential, Commercial, Multi-Family Complex

**FEATURES**

**Construction**

- Die-formed Cold-Rolled Steel
- Powder Coated Paint

**Finish**

- Brushed Nickel
- Black\*
- White\*
- Oil Rubbed Bronze\*

**Electrical & Technical**

- Input Voltage: 120V
- Input Frequency: 60Hz
- Projected Life: L70 > 50,000 hrs
- PF: >0.95
- CRI: >80 or >90 [Option]
- THD: <20%
- Adjustable Lumen Output
- CCT Selectable: 3000K/4000K/5000K
- Operating Temp.: -4°F ~ 104°F
- Damp Location Rated

**Optical**

- High Transmission Acrylic Lens

**Installation/Mounting**

- Flush Mount:
  - 4" Square J-Box
  - 4" Octagon J-Box

**Controls**

- Triac Dimming

**Compliance**

- JA8 TITLE 24 Compliant at 90CRI

**Dimmer Compatibility List:**

Leviton: IPL06-10Z, 6672-1LW, 6674-POW, DLS06-1LZ  
Lutron: TGCL-153P, MACL-153M, CTCL-153P, PD-6WCL

**Lumen Output**

- $\phi$ 14":
  - 14W: 980lm
  - 18W: 1,260lm
  - 25W: 1,750lm
- $\phi$ 16":
  - 14W: 980lm
  - 18W: 1,260lm
  - 25W: 1,750lm

**Warranty**


- 5 Year Warranty
- See warranty documentation for more information.



**ORDERING INFORMATION** **EXAMPLE: DRRC-14WS-CC-SN**

DRRC				
Series	Size/Wattage	CCT	Finish	CRI
DRRC	14WS - 14":14W/18W/25W 16WS - 16":14W/18W/25W	CC - 3000K/4000K/5000K	BN - Brushed Nickel BK - Black* WH - White* OB - Oil Rubbed Bronze*	90CRI [Option]

DIMENSIONS

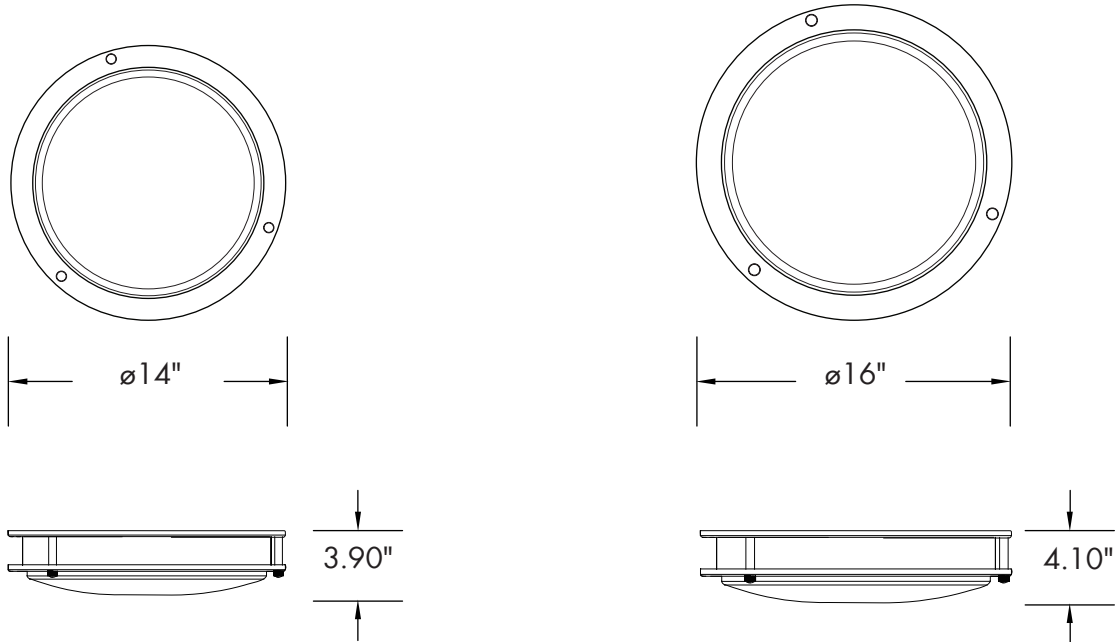

LUMEN OUTPUT

SKU	Size (in)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)
DRRC-14WS-CC-XX	14	14W/18W/25W	980 (14W)	70	1260 (18W)	70	1750 (25W)	70
DRRC-16WS-CC-XX	16	14W/18W/25W	980 (14W)	70	1260 (18W)	70	1750 (25W)	70