




tgs

the Real Troffers

OF LOS ANGELES

the Real Troffers

OF LOS ANGELES




MODERN

Crafted with sleek lines and contemporary flair, the Element™ Direct/Indirect Architectural Troffer seamlessly integrates into any modern architectural setting, whether an office, retail space, or educational facility.




FUTURISTIC

Designed to transcend traditional lighting solutions, the Outline™ T-Grid Light represents the pinnacle of modern lighting technology, delivering unparalleled performance and aesthetics.




UPSCALE

Merging exquisite aesthetics with exceptional functionality, the Contour™ Field Selectable Architectural Troffer sets a new standard in luxury lighting solutions, perfect for premium environments seeking refinement and efficiency.



STANDARD

Engineered for practicality without compromising on performance, the Wave™ CCT and Wattage Selectable Troffer is the ideal lighting solution for a wide range of applications, offering consistent illumination and ease of installation.



BASIC

Designed for straightforward lighting needs, the Eco Air™ Premium Backlit Panel offers reliable performance at an affordable price point, making it the best choice for budget-conscious projects.

ELEMENT™ 2

Direct/Indirect Architectural Troffer

Construction

0.5mm Die-formed Cold-Rolled Steel Body

Finish

White

Electrical & Technical

Input Voltage: 100-277V

Input Frequency: 50/60Hz

Projected L70 > 50,000 hrs

PF: >0.9

CRI: >80

THD: <20%

2x2 - 4CCT Selectable: 3000K / 3500K / 4000K / 5000K

Wattage Selectable: 24W / 35W / 40W

2x4 - 4CCT Selectable: 3000K / 3500K / 4000K / 5000K

Wattage Selectable: 30W / 35W / 40W / 50W

Controls

0-10V Dimming

EM Backup Accessories

8W EM Battery Backup



2' x 2'



2' x 4'



OUTLINE™

T-Grid Light

Construction

Lightweight Aluminum Frame

Finish

White Lens

Electrical & Technical

Input Voltage: 120-277V

Input Frequency: 50/60Hz

Projected L70 > 50,000 hrs

PF: >0.9

CRI: >80

THD: <20%


CCT Selectable: 3500K / 4000K / 5000K

Controls

0-10V Dimming – Dims to 10%

EM Backup Accessories


8W EM Battery Backup, 15W Inverter

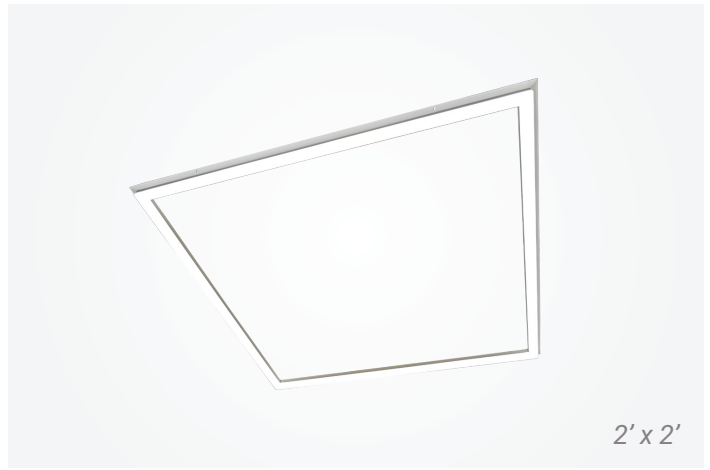

2' x 2'



2' x 4'

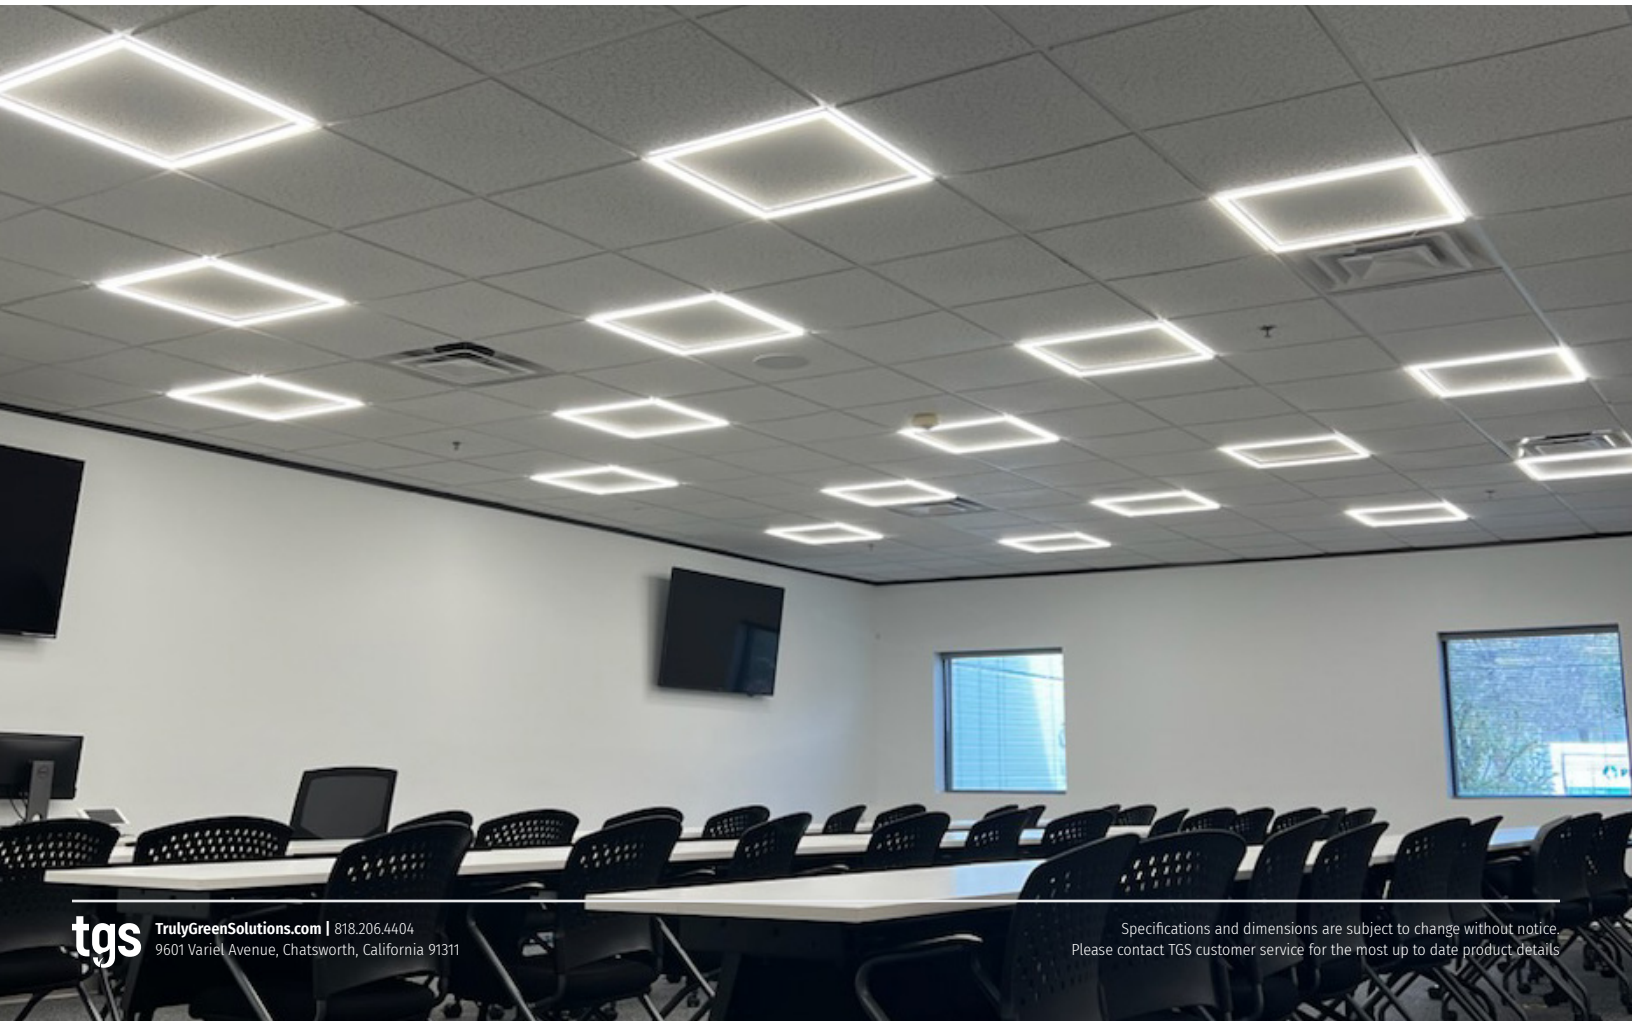

CONTOUR™

Field Selectable Architectural Troffer

Construction

Extruded Aluminum Housing
Backlit

Finish

Powder Coated White

Electrical & Technical

Input Voltage: 110-277V

Input Frequency: 50/60Hz

Projected L70 > 50,000 hrs

PF: >0.9

CRI: >80

THD: <20%


CCT Selectable: 3500K / 4000K / 5000K

Controls

0-10V Dimming – Dims to 10%

EM Backup Accessories

8W EM Battery Backup, 10W & 15W Inverter

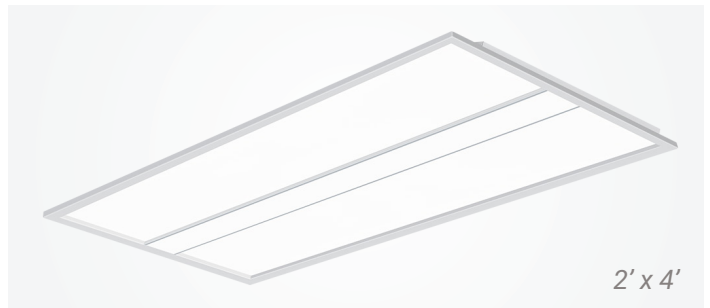

WAVE™

Wattage & CCT Selectable Troffer

ConstructionSteel Housing
Extruded Acrylic Diffusers**Finish**

Powder Coated White

Electrical & TechnicalInput Voltage: 110-277V
Input Frequency: 50/60Hz
Projected L70 > 50,000 hrs
PF: >0.9
CRI: >80
THD: <20%
CCT Selectable: 3500K / 4000K / 5000K**Controls**

0-10V Dimming – Dims to 10%

EM Backup Accessories

8W EM Battery Backup, 10W & 15W Inverter



2' x 2'



2' x 4'



ECO AIR™

Premium Backlit Panel

Construction

Aluminum Frame & Steel Backing with Integral Earthquake Clips

Finish

Powder Coated White

Electrical & Technical

Input Voltage: 120-277V

Input Frequency: 50/60Hz

Projected L70 > 50,000 hrs

PF: >0.9

CRI: >80

THD: <20%

CCT Selectable: 3500K / 4000K / 5000K

Controls

0-10V Dimming – Dims to 10%

EM Backup Accessories

8W EM Battery Backup, 10W & 15W Inverter

