



**Cylinder Lighting Pendant Mount**

**Architectural**

**DESCRIPTION**

The Cylinder Lighting Pendant Mount architectural luminaire provides a downward illumination while providing an even comforting distribution. The modern aesthetic of the luminaire is available in four different sizes and a wide range of color temperatures in 2700K, 3000K, 3500K, 4000K, and 5000K to accommodate any lighting requirements, ideally suited for commercial, residential, or hospitality environment.

**APPLICATIONS**

Residential, Hospitality, Retail, Hospital, Institutional, Office, Airport

**FEATURES**



**Cylinder Lighting Pendant Mount**

- 4"/18W (1,260 lm)
- 5"/25W (1,750 lm)
- 6"/36W (2,520 lm)
- 8"/43W (3,010 lm)

**Construction**

Die-Cast aluminum housing with durable finish.

**Electrical**

Input voltage: 120-277VAC


Projected L70: 50,000 hours  
System Efficacy: 70 LpW  
Warranty: 5 years  
0-10V Dimming

**Optical System**

Tempered Glass Lens.

**Installation/ Mounting**

Pendant Mounted



120-277VAC



0-10V Dimming

**Warranty**



5 Year Warranty.  
See warranty documentation for more information.

**Controls/Dimming**

0-10V Dimming



Wet Location Rated

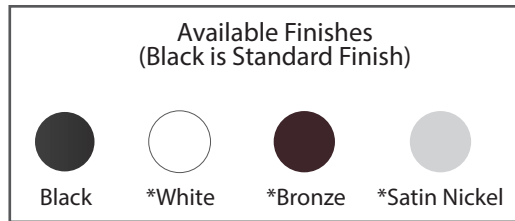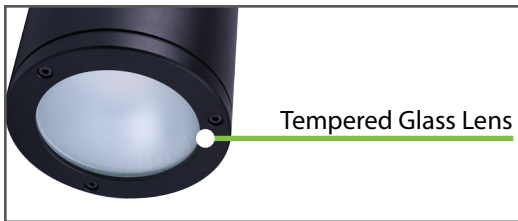

**Ordering Information**

**EXAMPLE: CPMR-0418-40-BK**

Series	Size/Wattage	CCT	Finish
CPMR	0418 - 4"/18W	27 - 2700K	BK - Black (Standard)
	0525 - 5"/25W	30 - 3000K	*WH - White
	0636 - 6"/36W	35 - 3500K	*BZ - Bronze
	0843 - 8"/43W	40 - 4000K	*SN - Satin Nickel
		50 - 5000K	

Specifications and Dimensions subject to change without notice.


Optional accessories are purchased separately.

\*MOQ and longer lead times may apply, please contact customer service for more information.

Performance Information

Input Voltage	120-277VAC
Input Frequency	50/60Hz
Wattage	See Performance Table
Delivered Lumens	See Performance Table
System Efficacy	See Performance Table
CRI	>80
Available CCT	2700K, 3000K, 3500K, 4000K, 5000K
Projected L70	50,000 hours
Power Factor	>0.9
THD	<20%
Dimming	0-10V Dimming
Operating Temp.	-4°~113°F
IP Rating	Wet Location Rated

Photometric Data

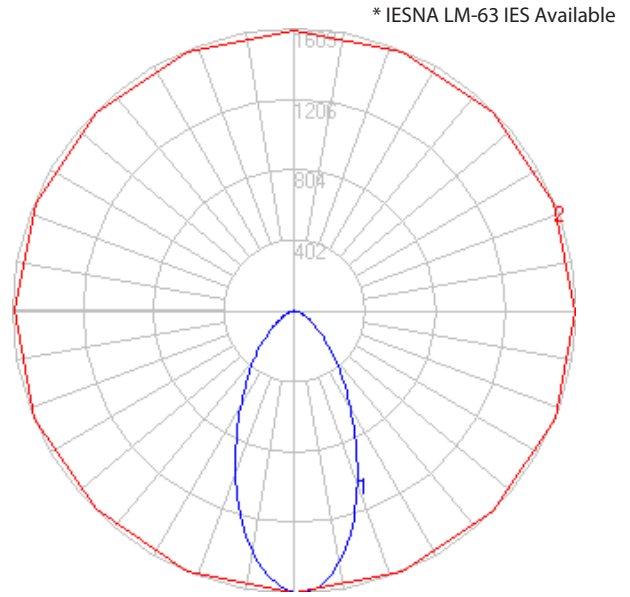

Performance Table

SKU	Size (Inch)	Wattage (W)	3000K	
			Delivered Lumens (lm)	System Efficacy (lm/W)
CPMR-0418-30-XX	4	18	1260	70
CPMR-0525-30-XX	5	25	1750	70
CPMR-0636-30-XX	6	36	2520	70
CPMR-0843-30-XX	8	43	3010	70

Product Dimensions

