

Date:	
Project Name:	
SKU #:	

Double Ring Oval Fixture
Flush Mounted Ceiling Light



APPLICATIONS

Residential, Commercial, Multi-Family Complex,

FEATURES

Construction

- Die-formed Cold-Rolled Steel
- Powder Coated Paint

Finish

- Brushed Nickel
- Black*
- Oil Rubbed Bronze*

Electrical & Technical

- Input Voltage: 120V
- Input Frequency: 60Hz
- Projected Life: L70 > 50,000 hrs
- PF: >0.9
- CRI: >80 or >90 [Option]
- THD: <20%
- CCT Selectable: 3000K/4000K/5000K
- Damp Location Rated

Optical

- High Transmission Acrylic Lens

Installation/Mounting

- Flush Mount

Controls

- Triac Dimming

Compliance

- JA8 TITLE 24 Compliant at 90CRI

Dimmer Compatibility List:

Leviton: IPL06-10Z, 6672-1LW, 6674-POW, DLS06-1LZ
Lutron: TGCL-153P, MACL-153M, CTCL-153P, PD-6WCL

Lumen Output

- 32"/42W: 3,800lm

Warranty



- 5 Year Warranty
- See warranty documentation for more information.



ORDERING INFORMATION **EXAMPLE: OSMR-3248-30-BN**

OSMR				
Series	Size/Wattage	CCT	Finish	CRI
OSMR	3242 - 32"/42W	CC - 3000K/4000K/5000K	BN - Brushed Nickel BK - Black* OB - Oil Rubbed Bronze*	90CRI [Option]

DIMENSIONS

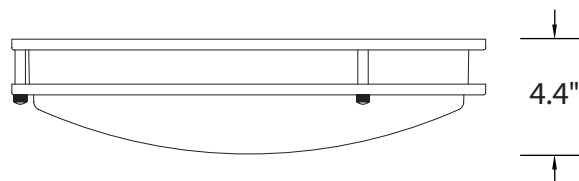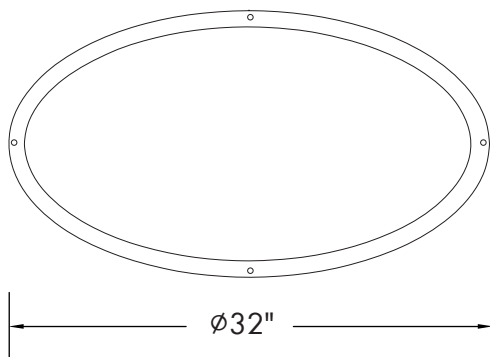

Weight: 7.43 lb.

LUMEN OUTPUT

SKU	Size (in)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
OSMR-3242-40-XX	32	42	3800	90