

Date:	
Project Name:	
SKU #:	

**Contemporary Vanity I**  
Wall Mounted



**MOUNTING OPTIONS**



Flush Mount  
(Standard)

**APPLICATIONS**

Bathroom, Bedroom, Dressing Room, Etc

**FEATURES**

**Construction**

- Die-formed Cold-Rolled Steel
- Powder Coated Paint

**Finish**

- Brushed Nickel
- Black\*
- White\*

**Electrical & Technical**

- Input Voltage: 120V
- Input Frequency: 60Hz
- Projected L70 > 50,000 hrs
- PF: >0.95
- CRI: >80 or >90\* [Option]
- THD: <20%
- CCT Selectable: 2700K/ 3000K/ 3500K/4000K/5000K
- Operating Temp.: -4°F ~ 113°F
- Damp Location Rated

**Optical**

- High Transmission
- White Acrylic Lens
- 270° Beam Angle

**Installation/Mounting**

- Wall Mounted

**Controls**

- Triac Dimming

**Compliance**

- JA8 TITLE 24 Compliant at 90CRI

**Dimmer Compatibility List:**

Leviton: IPL06-10Z, 6672-1LW, 6674-POW, DLS06-1LZ  
Lutron: TGCL-153P, MACL-153M, CTCL-153P, PD-6WCL

**Lumen Output**

- 1.5'/20W: 1,400lm
- 2'/25W: 1,725lm
- 3'/30W: 2,100lm
- 4'/35W: 2,450lm

**Warranty**


- 5 Year Warranty
- See warranty documentation for more information.



**ORDERING INFORMATION** **EXAMPLE: VF1-2425-CC-BN**

VF1				
Series	Size/Wattage	CCT	Finish	CRI Option
VF1	1820 - 18"/20W 2425 - 24"/25W 3630 - 36"/30W 4835 - 48"/35W	CC - 2700K/3000K/3500K/4000K/5000K	BN - Brushed Nickel BK - Black* WH - White*	90CRI (Option*)

**DIMENSIONS**

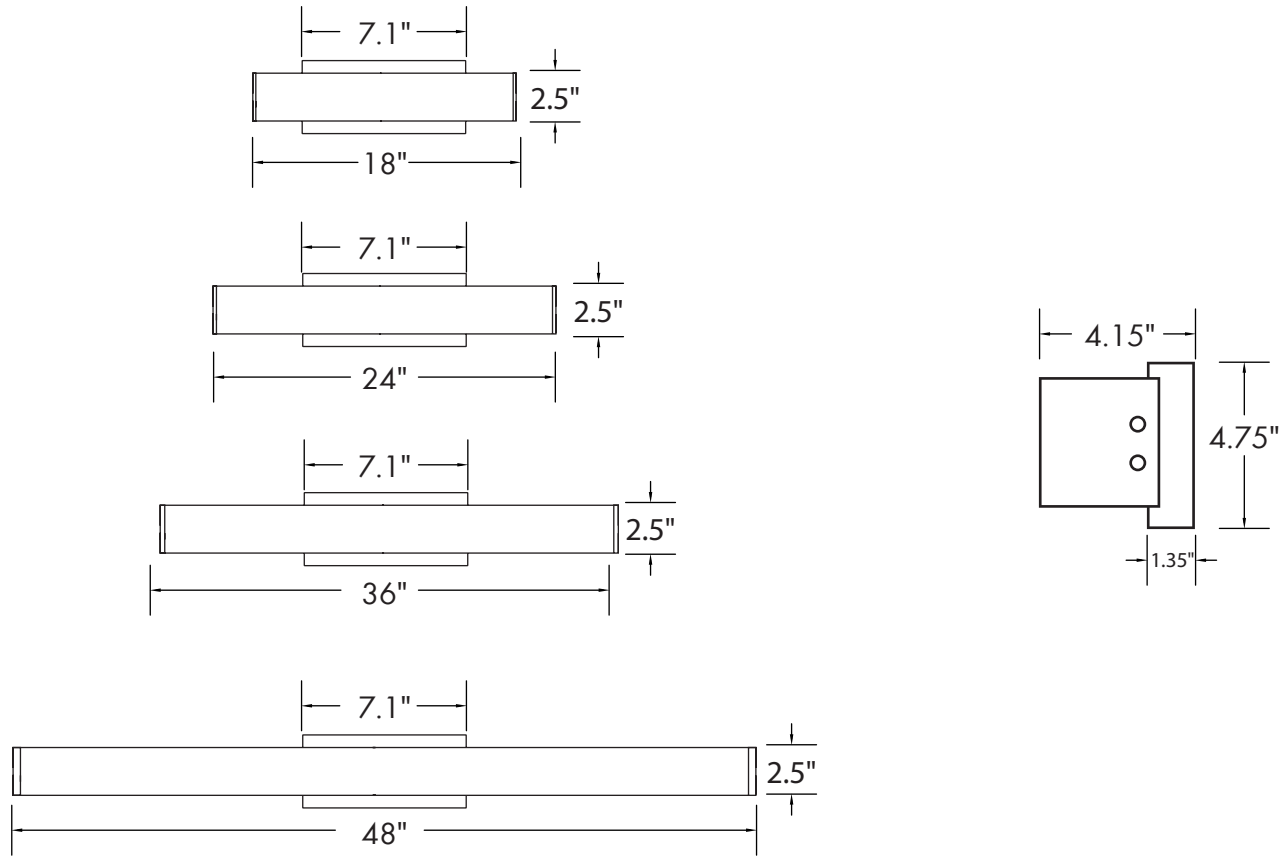

**LUMEN OUTPUT**

SKU	Size (in)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
VF1-1820-CC-BN	18	20	1400	70
VF1-2425-CC-BN	24	25	1725	70
VF1-3630-CC-BN	36	30	2100	70
VF1-4835-CC-BN	48	35	2450	70