

Date:	
Project Name:	
SKU #:	

ThinTek™ Mini R3 5CCT
Surface Mount Downlight



APPLICATIONS

Residential, Commercial, Multi-Family Complex

FEATURES

Construction

- Die-cast Aluminum Housing

Finish

- White Trim

Electrical & Technical

- Input Voltage: 120V
- Input Frequency: 60Hz
- Projected L70: ≥ 50,000 hrs
- PF: >0.9
- CRI: >90
- THD: <20%
- CCT Selectable: 2700K/3000K/
3500K/4000K/5000K
- Operating Temp.: -4°F ~ 113°F
- Wet Location Rated

Optical

- Edge-lit
- 120° Beam Angle

Installation/Mounting

- Surface Mounted:
2.75" and 3.5" Junction Box

Controls

- Triac Dimming

Compliance

- JA8 TITLE 24 Compliant

Dimmer Compatibility List:

Leviton: 6672, 6674, DSL06, RNL06, IPL06
Lutron: TG-600PR-WH, S-600PR-WH, CTCL-153PDH-WH, TGCL-153PH-LA, SLV-600P-AL, DV-600PR-WH, SCL-153PH-WH, GT-600P, DVCL-153P, MSCL-OP153M, MACL-153M//MA-R, PD-6WCL

Lumen Output

- 5"/10W: 710lm
- 7"/15W: 1,241lm
- 9"/18W: 1,460lm
- 11"/21W: 2,156lm
- 13"/24W: 2,431lm

Warranty


- 5 Year Warranty
- See warranty documentation for more information.



ORDERING INFORMATION **EXAMPLE: 880510-R3-5CCT**

88	Round Panel	Size/Wattage	Shape/Type	CCT
88		0510 - 5"/10W 0715 - 7"/15W 0918 - 9"/18W 1121 - 11"/21W 1324 - 13"/24W	R3 - Round	5CCT - 2700K/3000K/3500K/4000K/5000K

DIMENSIONS

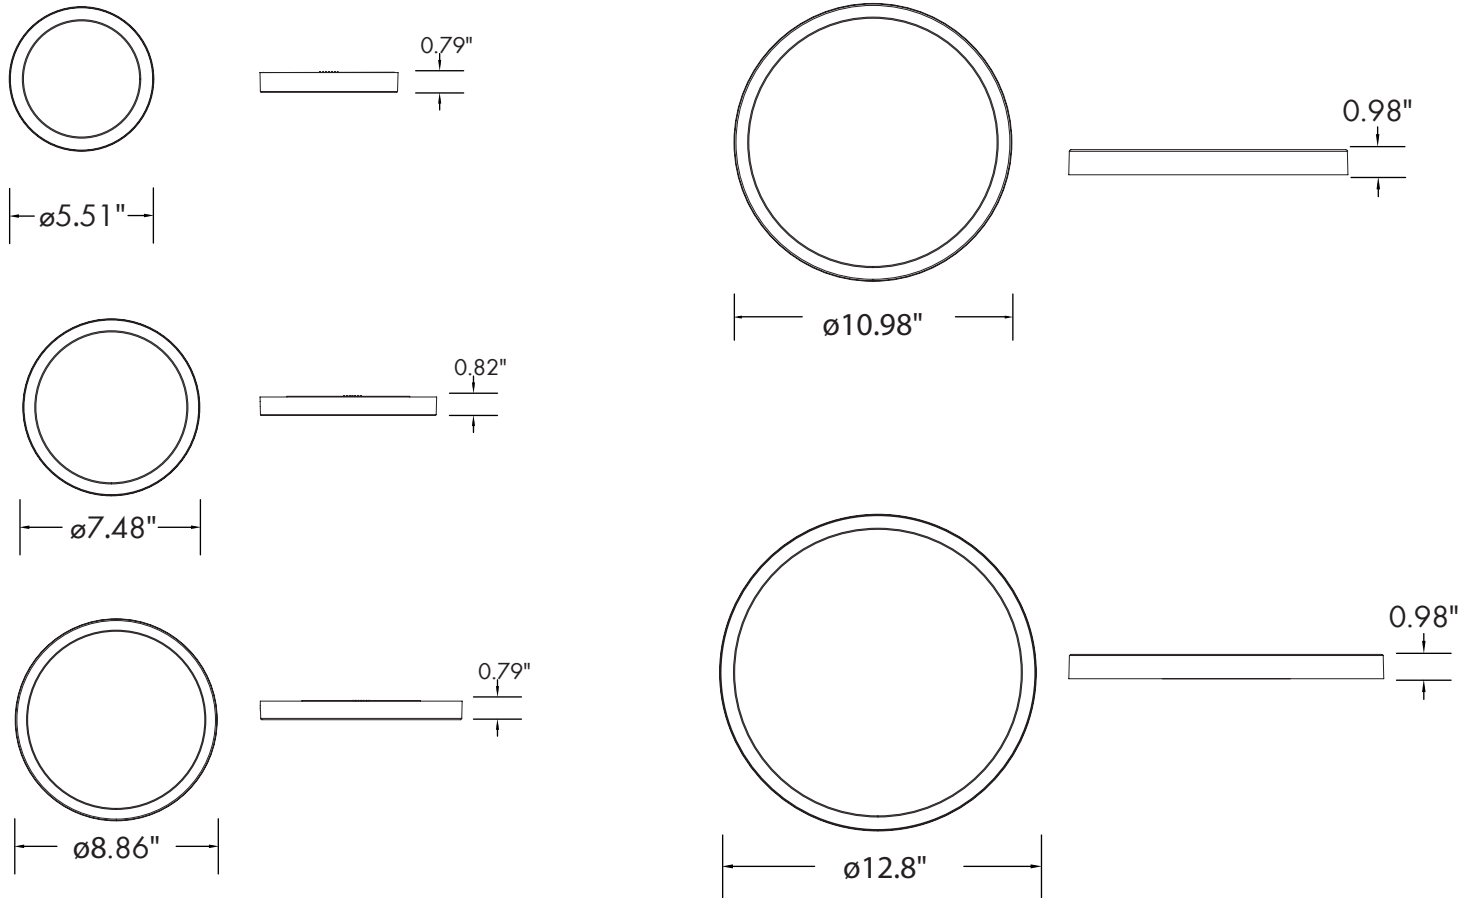

LUMEN OUTPUT

SKU	Size (in)	Wattage (W)	(2700K)		(3000K)		(3500K)		(4000K)		(5000K)	
			Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)
880510-R3-5CCT	5	10	668	66.8	671	67.1	693	69.3	710	71.0	688	68.8
880715-R3-5CCT	7	15	1186	79.06	1201	80.06	1223	84.53	1241	82.7	1215	81
880918-R3-5CCT	9	18	1389	77.16	1409	78.27	1437	79.83	1460	81.11	1426	65
881121R3-5CCT	11	21	2016	96	2037	97	2079	99	2156	102.66	2108	100.38
881324-R3-5CCT	13	24	2386	99.41	2405	100.20	2427	101.12	2431	101.29	2419	100.79

ACCESSORIES



Mounting
Bracket
(Included)