

Date:	
Project Name:	
SKU #:	

**ICON S2™**  
Icon Series Square Downlight 2"



STL - Square Trimless

**APPLICATIONS**

Residential, Commercial, Multi-Family Complex

**FEATURES**

**Construction**

- Aluminum Housing

**Finish**

- White  
- Black Trim [Option]

**Electrical & Technical**

- Input Voltage: 120VAC  
- Input Frequency: 60Hz  
- Projected Life: L70 > 50,000 hrs  
- PF: >0.9  
- CRI: >90  
- THD: <20%  
- CCT Selectable: 2700K/3000K/3500K/4000K/5000K  
- Operating Temp.: -4°F ~ 104°F  
- Wet Location Rated  
- IC Air-Tight Rated

**Optical**

- White PC Lens  
- Available Beam Angles:  
- 24°  
- 38°  
- 60°

**Installation/Mounting**

- Spring Clip Mount [W/Trim]  
- Flush to Ceiling [Trimless]

**Controls**

- Triac Dimming

**Compliance**


- JA8 TITLE 24 Compliant

**Lumen Output**

• 2"/8W: 600lm  
• 2"/15W: 1000lm

**Warranty**





- 5 Year Warranty  
See warranty documentation for more information.



**ORDERING INFORMATION** **EXAMPLE: ICON-S2-8-5C-38-SBT-WH**

Series	Size	Wattage	CCT	Beam Angle	Trim Type	Trim Finish	Options
ICOIN-S	2 - 2"	8 - 8W 15 - 15W	5C - 2700K/3000K/ 3500K/4000K/5000K	24 - 24° 38 - 38° 60 - 60°	SBT - Square Baffled Trim STL - Square Trimless	BK - Black WH - White	ICON-S-NC [New Construction Plate W/ Hanger Bar] FLEX-4 [4' Flexible Connector] FLEX-6 [6' Flexible Connector] FLEX-10 [10' Flexible Connector] FLEX-20 [20' Flexible Connector]

DIMENSIONS

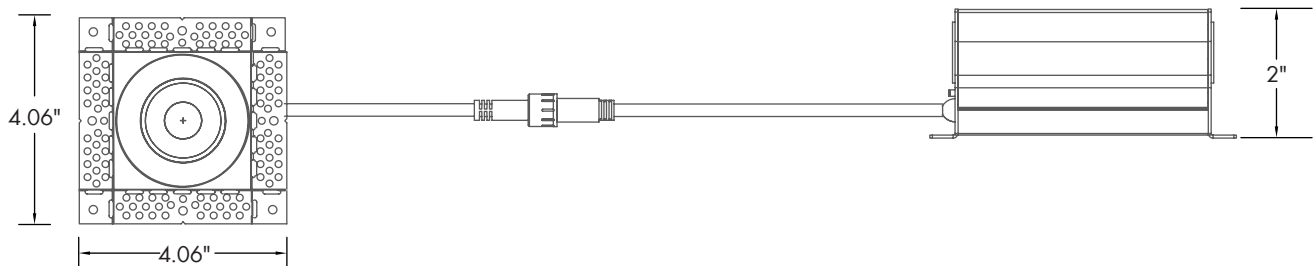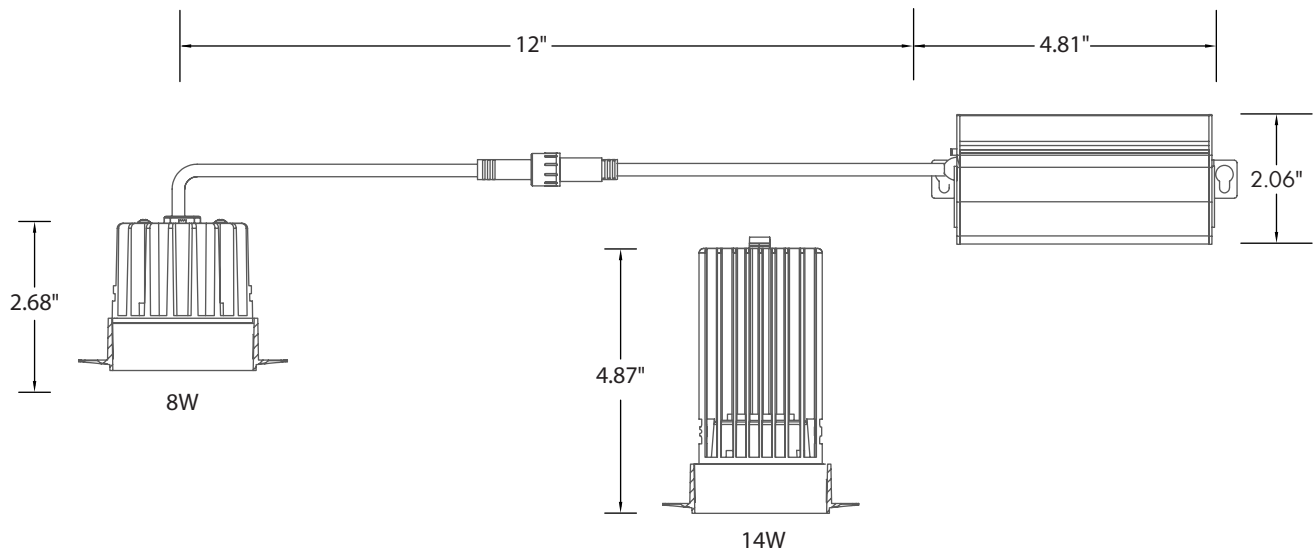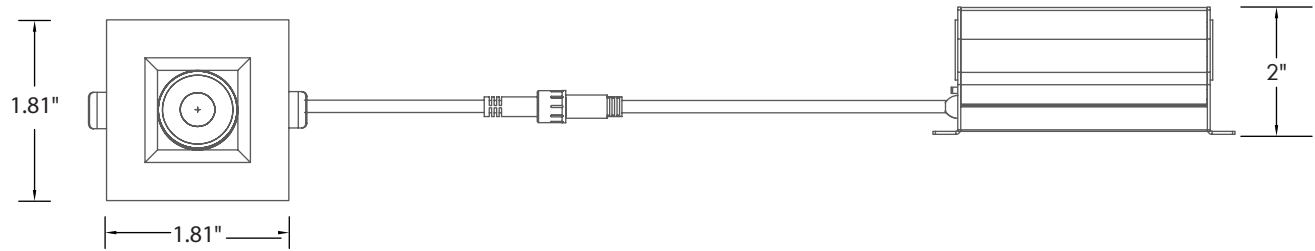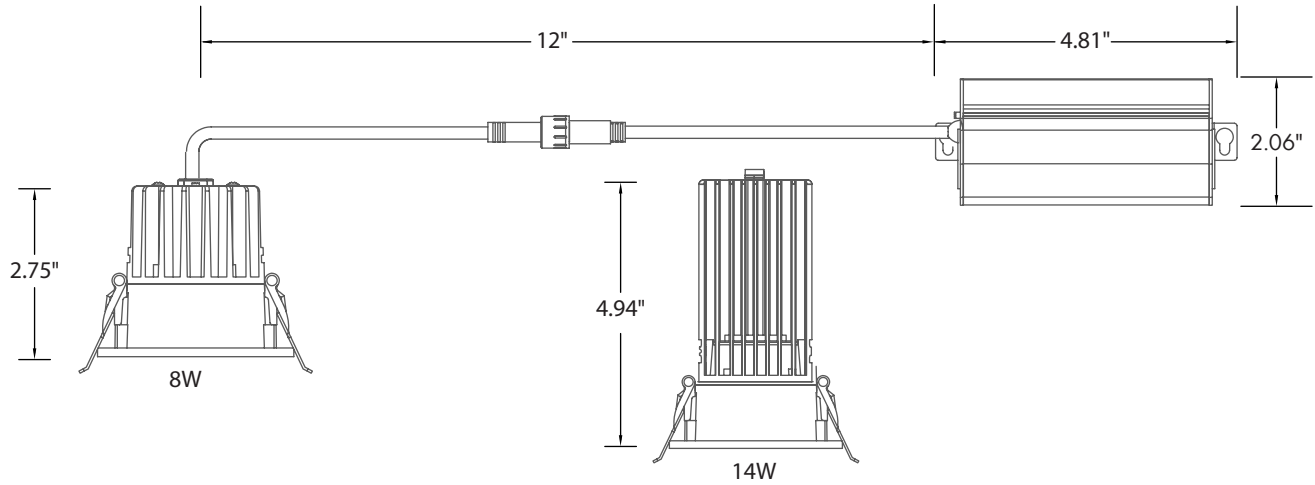

LUMEN OUTPUT

SKU	Size (in)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
ICON-S-2-8-5C-38-SBT-WH	2	8	600	75
ICON-S-2-15-5C-38-SBT-WH	2	15	1000	66


ACCESSORIES



Square Baffled Trim [SBT]




Square Trimless [STL]

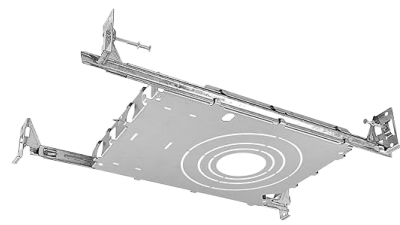


New Construction Kit W/ Hanger Bar 2"/3"/3.5"/4" [ICON-S-NC]

COMPLETED PRODUCT

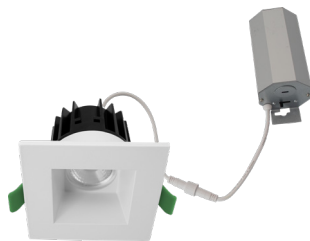

ICON S2™  
Square Baffled Trim

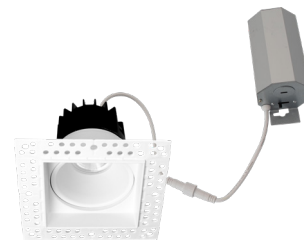

ICON S2™  
Square Trimless