

Date:	
Project Name:	
SKU #:	

**ThinTek™ MR EM**  
Flush Mount



**APPLICATIONS**

Residential, Commercial, Multi-Family Complex

**FEATURES**

**Construction**

- Die-cast Aluminum Driver Housing

**Finish**

- White Trim

**Electrical & Technical**

- Input Voltage: 120-277VAC W/ EM
- Input Voltage: 120VAC W/O EM
- Input Frequency: 50/60Hz
- Projected L70: > 50,000 hrs
- PF: >0.9
- CRI: >90
- THD: <20%
- CCT: 3000K, 4000K, 5000K
- Operating Temp.: -4°F ~ 104°F
- Integrated Emergency Battery Backup Driver [Option]
- Damp Location Rated

**Optical**

- 100° Beam Angle

**Installation/Mounting**

- Flush Mount

**Controls**

- Triac Dimming [120V]
- Non-Dimmable [277V]

**Compliance**

- JA8 TITLE 24 Compliant

**Dimmer Compatibility List:**

Leviton: IPL06-10Z, IPE04-1LZ, 6674-POW, 6633-P, DSL06, 6615-P  
 Lutron: : DVCL-253P-WH, PD-5NE-IV, DVCL-153P-AL, MACL-153MLH, MA-1000-WH, PD-6WCL-WH-R, DVELV-300PH-WH, MAELV-600-WH, S-600, RRD-10ND, AY-600P, CTCL-153P, TGCL-153P, LGCL-153PL, LG-603P, MACL-153M, CTELV-303P, DVELV-300P, DV-600P, PD-6WCL-WH Caseta, DVLV-600P  
 Legrand: RHCL453PNICCV4, RH703PTUTCCCV4, LS603PWV, RH703P  
 Cooper: S106P

**Lumen Output**

- 7"/17W: 1,000lm
- EM Mode: 300lm/90min

**Warranty**



- 5 Year Warranty  
 See warranty documentation for more information.



**ORDERING INFORMATION** **EXAMPLE: M-0717-RE-40**

M			
Series	Size/Wattage	Shape/Type	CCT
M	0717 - 7"/17W	R - No Emergency Battery Backup RE - Emergency Battery Backup	30 - 3000K 40 - 4000K 50 - 5000K

## DIMENSIONS

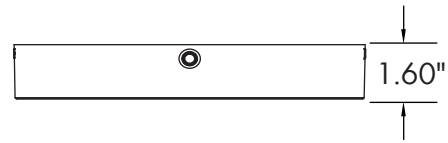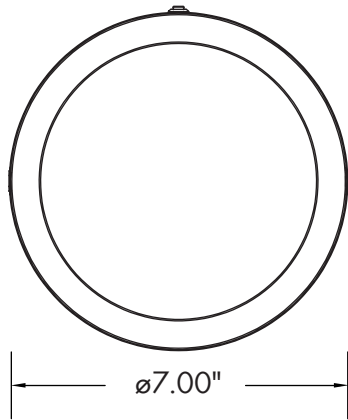

Weight: 2.11 lb.

## LUMEN OUTPUT

Note: Emergency Battery Backup Mode Output Lumen: 300 lm for 90min

SKU	Size (in)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
M-0717-R-30	7	17	1000	58.8
M-0717-RE-30	7	17	1000	58.8