



Cylinder Lighting Up & Down Wall Mount

Architectural

DESCRIPTION

The Cylinder Lighting Up & Down Wall Mount architectural luminaire provides an upward and downward illumination for any location, especially for commercial, residential, or hospitality environments. The luminaire is available in four different sizes and has a wide range of color temperatures in 2700K, 3000K, 3500K, 4000K, and 5000K to accommodate any lighting requirements.

APPLICATIONS

Residential, Hospitality, Retail, Hospital, Institutional, Office, Airport

FEATURES



Cylinder Lighting Up & Down Wall Mount

- 4"/18W (1,260 lm)
- 5"/25W (1,750 lm)
- 6"/36W (2,520 lm)
- 8"/43W (3,010 lm)

Construction

Die-Cast aluminum housing with durable finish.

Electrical

Input voltage: 120-277VAC


Projected L70: 50,000 hours
System Efficacy: 70 LpW
Warranty: 5 years
0-10V Dimming

Optical System


Tempered Glass Lens.

Installation/ Mounting

Wall Mounted



120-277VAC



0-10V Dimming

Warranty


5 Year Warranty.
See warranty documentation for more information.

Controls/Dimming

0-10V Dimming
Photocell option available. Factory Installed



Wet Location Rated

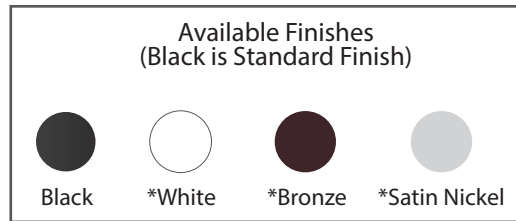

Ordering Information

EXAMPLE: CUDWR-0418-40-BK

Series	Size/Wattage	CCT	Finish
CUDWR	0418 - 4"/18W	27 - 2700K	BK - Black (Standard)
	0525 - 5"/25W	30 - 3000K	*WH - White
	0636 - 6"/36W	35 - 3500K	*BZ - Bronze
	0843 - 8"/43W	40 - 4000K	*SN - Satin Nickel
		50 - 5000K	

Specifications and Dimensions subject to change without notice.

Optional accessories are purchased separately.


*MOQ and longer lead times may apply, please contact customer service for more information.

Performance Information

Input Voltage	120-277VAC
Input Frequency	50/60Hz
Wattage	See Performance Table
Delivered Lumens	See Performance Table
System Efficacy	See Performance Table
CRI	>80
Available CCT	2700K, 3000K, 3500K, 4000K, 5000K
Projected L70	50,000 hours
Power Factor	>0.9
THD	<20%
Dimming	0-10V Dimming
Operating Temp.	-4°~113°F
IP Rating	Wet Location Rated

Photometric Data


* IESNA LM-63 IES Available

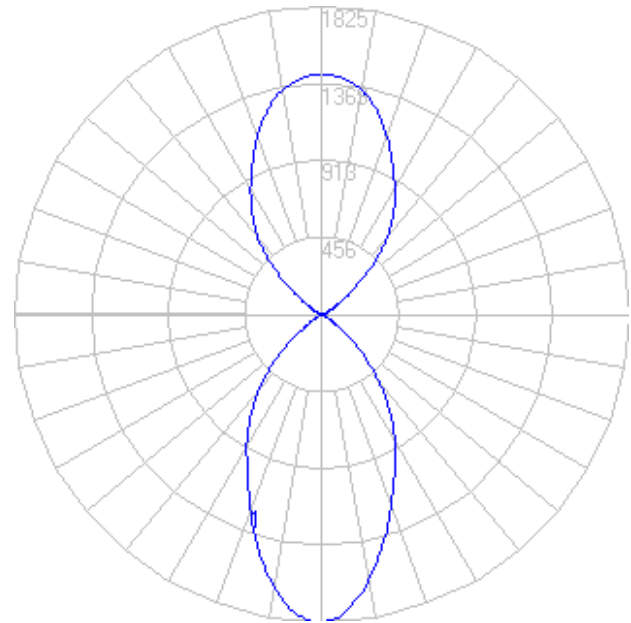


Performance Table

SKU	Size (Inch)	Wattage (W)	3000K	
			Delivered Lumens (lm)	System Efficacy (lm/W)
CUDWR-0418-30-XX	4	18	1260	70
CUDWR-0525-30-XX	5	25	1750	70
CUDWR-0636-30-XX	6	36	2520	70
CUDWR-0843-30-XX	8	43	3010	70


Product Dimensions




Weight: 3.75 lbs



Weight: 4.41 lbs



Weight: 7.05 lbs



Weight: 11.46 lbs