



**Decorative Dome Round Fixture** **Flush Mount**

**DESCRIPTION**

The Decorative Dome- Round Fixture design provides functionality with elegances, ideal for residential and commercial environments. The luminaire can switch between five color temperatures in 2700K, 3000K, 3500K, 4000K, and 5000K, allowing it to accommodate any location requirements. The alabaster glass diffuser distributes an even and comforting illumination.

**APPLICATIONS**

Hospitality, Airports, Schools, Offices, Government Facilities, Residential Spaces

**FEATURES**



**Decorative Dome Round Fixture**

11", 14W (980 lm)  
13", 14W (980 lm)  
15", 18W (1,260 lm)

Projected L70: 50,000 hours  
Warranty: 5 Years  
System Efficacy: 70+ LpW

**Construction**

Steel housing with powder coated paint.  
Finish available in Satin Nickel or Bronze.  
Alabaster Frosted Glass Lens.

**Electrical**

Input Voltage: 120VAC

**Optical System**

Glare controlling lens for comfortable light distribution.  
Provides a 116° beam angle.

**Installation/ Mounting**

Surface Mounting (4" J-box and Octagon J-box)

**Warranty**

5 Year Warranty.  
See warranty documentation for more information.

**Controls/Dimming**

TRIAC Dimming  
CCT Selectable between 2700K, 3000K, 3500K, 4000K, 5000K.



TITLE 24 Compliant



90+ CRI



5 CCT Switchable



Damp Location Rated



Phase/TRIAC Dimming



Alabaster Glass Lens



Two Finish Available:  
Satin Nickel and  
Bronze

**Ordering Information**

**EXAMPLE: GSMF-1314-CC-SN**

Series	Size/Wattage	CCT Selectable	Finish
GSMF	1114 - 11"/14W 1314 - 13"/14W 1518 - 15"/18W	CC - CCT Selectable (2700K/3000K/3500K/4000K/5000K)	SN - Satin Nickel *BR - Bronze

Specifications and Dimensions subject to change without notice.

\*MOQ and longer lead times may apply, please contact customer service for more information.

Performance Information

Input Voltage	120VAC
Input Frequency	60Hz
Wattage	See Performance Table
Delivered Lumens	See Performance Table
System Efficacy	See Performance Table
CRI	>90
Available CCT	2700K/3000K/3500K/ 4000K/5000K
Projected L70	50,000+ hours
Power Factor	>0.9
THD	<20%
Dimming	TRIAC Dimming
Operating Temp.	-4°~104°F
IP Rating	Damp Location Rated


Mounting



Performance Table

SKU	Size (in)	Wattage (W)	3000K	
			Delivered Lumens (lm)	System Efficacy (lm/W)
GSMF-1114-CC-XX	11	14	980	70
GSMF-1314-CC-XX	13	14	980	70
GSMF-1518-CC-XX	15	18	1260	70

Product Dimensions

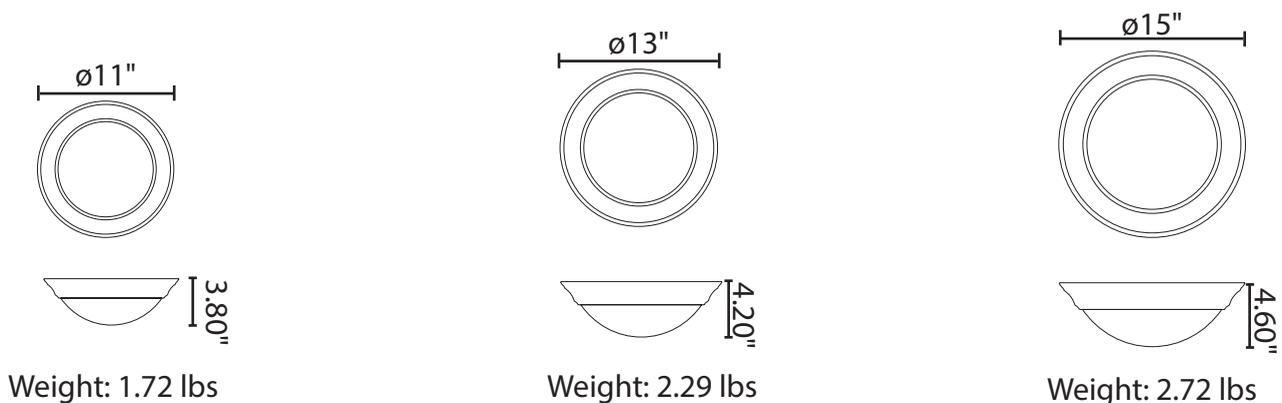

Dimmer Compatibility List

Recommended dimmers

Lutron	Leviton	EATON
DVCL-153PR-WH CTCL-153PDH-WH TGCL-153PH-WH MACL-153MH-WH P-PKG1W-WH-R	R62-06674-P0W R12-06672-1LW R50-IPL06-10M	SAL06P-LA-K