



**Cylinder Lighting Up & Down Wall Mount Square**

**Architectural**

**DESCRIPTION**

The Cylinder Lighting Up & Down Wall Mount Square architectural luminaire provides an upward and downward illumination for any location, especially for commercial, residential, or hospitality environments. The luminaire is available in four different sizes and has a wide range of color temperatures in 2700K, 3000K, 3500K, 4000K, and 5000K to accommodate any lighting requirements.

**APPLICATIONS**

Residential, Hospitality, Retail, Hospital, Institutional, Office, Airport

**FEATURES**



**Cylinder Lighting Up and Down Wall Mount Square**

- 4", 18W (1,260 lm)
- 5", 25W (1,750 lm)
- 6", 36W (2,520 lm)
- 8", 43W (3,010 lm)

**Construction**

Die-Cast aluminum housing with durable finish.

**Electrical**

Input voltage: 120-277VAC

Projected L70: 50,000 hours  
System Efficacy: 70 LpW  
Warranty: 5 years  
0-10V Dimming

**Optical System**

Tempered Glass Lens.

**Installation/ Mounting**


Surface Mounted

**Warranty**

5 Year Warranty.  
See warranty documentation for more information.

**Controls/Dimming**

0-10V Dimming





120-277VAC



0-10V Dimming



Wet Location Rated

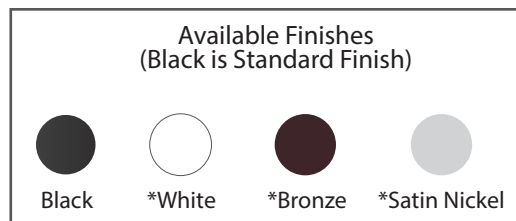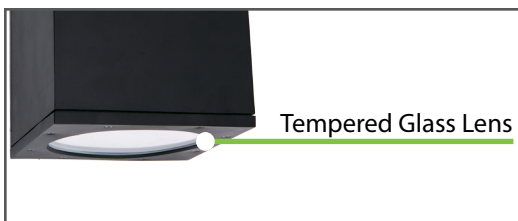

**Ordering Information**

**EXAMPLE: CUDWS-0418-40-BK**

Series	Trim Size and Wattage	CCT	Finish
CUDWS	0418 - 4", 18W 0525 - 5", 25W 0636 - 6", 36W 0843 - 8", 43W	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K 50 - 5000K	BK - Black (Standard) *WH - White *BZ - Bronze *SN - Satin Nickel


Specifications and Dimensions subject to change without notice.

\*MOQ and longer lead times may apply, please contact customer service for more information.

Performance Information

Input Voltage	120-277VAC
Input Frequency	60Hz
Wattage	See Performance Table
Delivered Lumens	See Performance Table
System Efficacy	See Performance Table
CRI	>80
Available CCT	2700K, 3000K, 3500K, 4000K, 5000K
Projected L70	50,000 hours
Power Factor	>0.9
THD	<20%
Dimming	0-10V Dimming
Operating Temp.	-4°~113°F
IP Rating	Wet Location Rated


Photometric Data

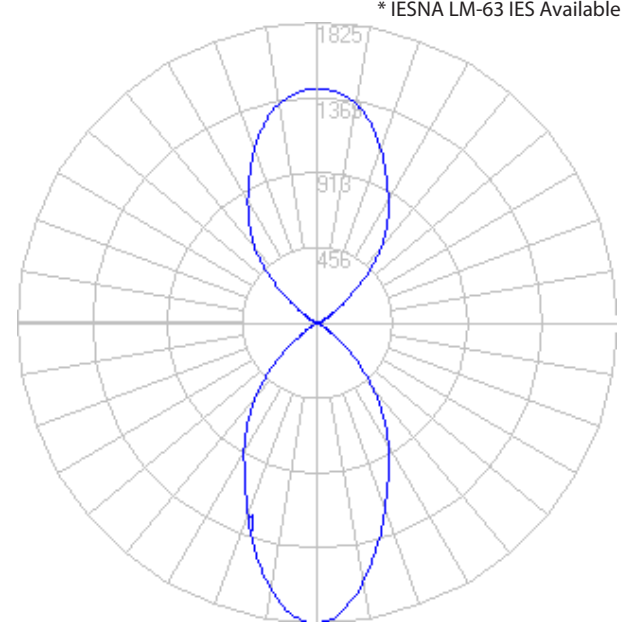


Performance Table

SKU	Trim Size (Inch)	Wattage (W)	3000K	
			Delivered Lumens (lm)	System Efficacy (lm/W)
CUDWS-0418-30-XX	4	18	1260	70
CUDWS-0525-30-XX	5	25	1750	70
CUDWS-0636-30-XX	6	36	2520	70
CUDWS-0843-30-XX	8	43	3010	70


Product Dimensions




Weight: 3.75 lbs

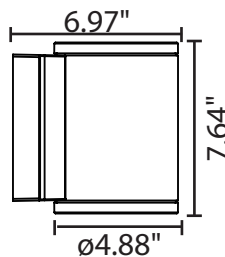

Weight: 4.41 lbs

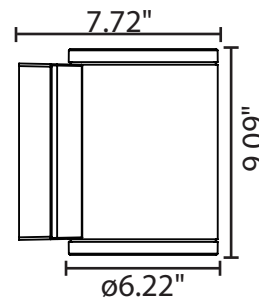

Weight: 7.05 lbs

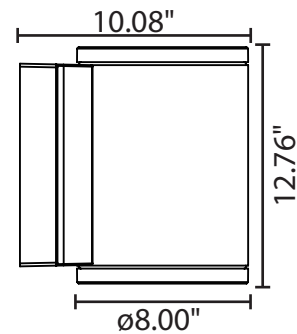

Weight: 11.46 lbs