


Date:	
Project Name:	
SKU #:	

ICON R4™
Icon Series Round Downlight 4"



RBT - Round Baffled Trim



RTL - Round Trimless

APPLICATIONS

Residential, Commercial, Multi-Family

FEATURES

Construction

- Aluminum Housing

Finish

- White
- Black Trim [Option]

Electrical & Technical

- Input Voltage: 120VAC
- Input Frequency: 60Hz
- Projected Life: L70 > 50,000 hrs
- PF: >0.9
- CRI: >90
- THD: <20%
- CCT Selectable: 2700K/3000K/3500K/4000K/5000K
- Operating Temp.: -4°F ~ 104°F
- Wet Location Rated
- IC Air-Tight Rated

Optical

- White PC Lens
- Available Beam Angles:
 - 24°
 - 38°
 - 60°

Installation/Mounting

- Spring Clip Mount [W/Trim]
- Flush to Ceiling [Trimless]

Controls

- Triac Dimming

Compliance


- JA8 TITLE 24 Compliant

Lumen Output

- 4"/15W: 1000lm
- 4"/18W: 1500lm

Warranty





- 5 Year Warranty
See warranty documentation for more information.



ORDERING INFORMATION **EXAMPLE: ICON-R-4-15-5C-24-RBT-WH**

Series	Size	Wattage	CCT	Beam Angle	Trim Type	Trim Finish	Options
ICON-R	4 - 4"	15 - 15W 18 - 18W	5C - 2700K/3000K/ 3500K/4000K/5000K	24 - 24° 38 - 38° 60 - 60°	RBT - Round Baffled Trim RTL - Round Trimless	BK - Black WH - White	ICON-R-NC [New Construction Plate W/ Hanger Bar] FLEX-4 [4' Flexible Connector] FLEX-6 [6' Flexible Connector] FLEX-10 [10' Flexible Connector] FLEX-20 [20' Flexible Connector]


DIMENSIONS

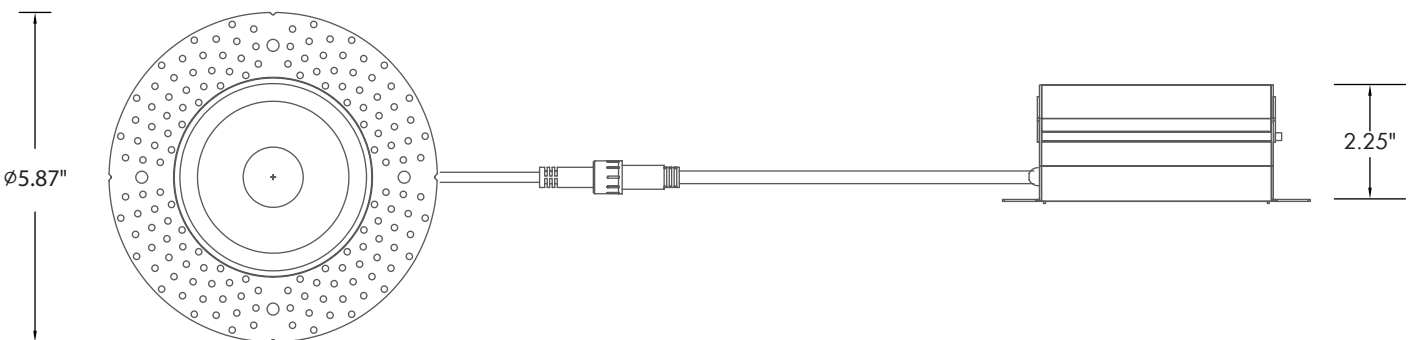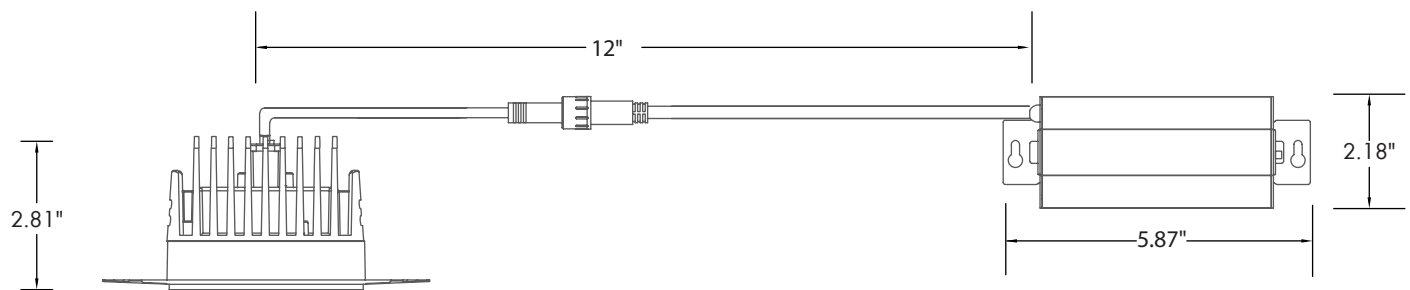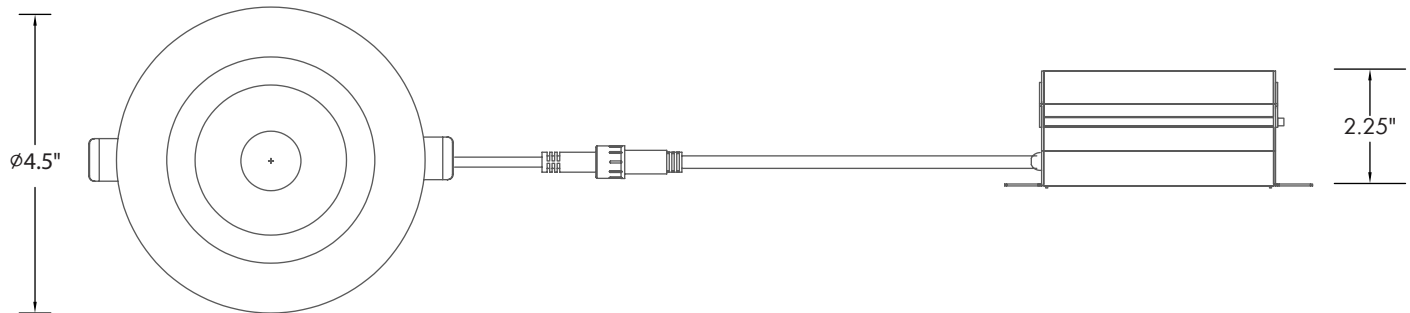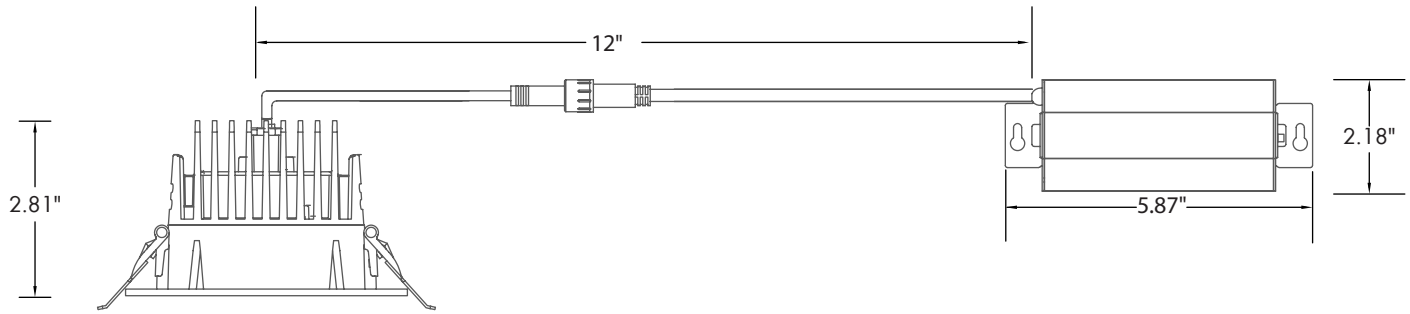

LUMEN OUTPUT

SKU	Size (in)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
ICON-R-4-15-5C-38-RBT-WH	4	15	1000	66
ICON-R-4-18-5C-38-RBT-WH	4	18	1500	83


ACCESSORIES



Baffled Trim [RBT]



Round Trimless [RTL]

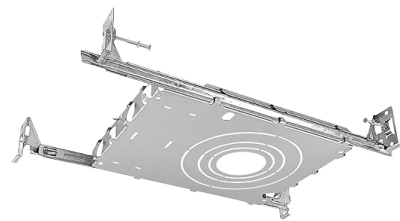

New Construction Kit
W/ Hanger Bar
2"/3"/3.5"/4"
[ICON-R-NC]

COMPLETED PRODUCT



ICON R4™
Round Baffled Trim



ICON R4™
Round Trimless