



Cylinder Lighting Ceiling Mount **Architectural**

DESCRIPTION

The Cylinder Lighting Ceiling Mount architectural luminaire provides a downward illumination while providing an even comforting distribution. The modern aesthetic of the luminaire is available in four different sizes and a wide range of color temperatures in 2700K, 3000K, 3500K, 4000K, and 5000K to accommodate any lighting requirements, ideally suited for commercial, residential, or hospitality environment.

APPLICATIONS

Residential, Hospitality, Retail, Hospital, Institutional, Office, Airport



FEATURES

Construction

Die-Cast aluminum housing with durable finish.

Electrical

Input voltage: 120-277VAC

Optical System

Tempered Glass Lens.

Installation/ Mounting

Surface Mounted

Warranty

5 Year Warranty.
See warranty documentation for more information.


Controls/Dimming

0-10V Dimming


Cylinder Lighting Ceiling Mount Fixture

- 4"/18W (1,260 lm)
- 5"/25W (1,750 lm)
- 6"/36W (2,520 lm)
- 8"/43W (3,010 lm)

Projected L70: 50,000 hours
System Efficacy: 70 LpW
Warranty: 5 years
0-10V Dimming





120-277VAC



0-10V Dimming



Wet Location Rated

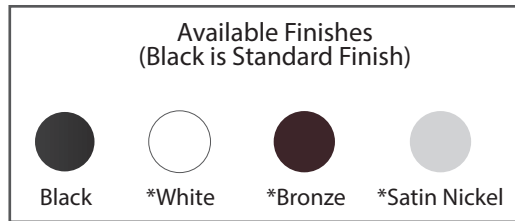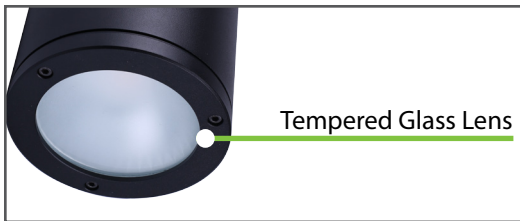

Ordering Information

EXAMPLE: CCMR-0418-40-BK

Series	Size/Wattage	CCT	Finish
CCMR	0418 - 4"/18W	27 - 2700K	BK - Black (Standard) *WH - White *BZ - Bronze *SN - Satin Nickel
	0525 - 5"/25W	30 - 3000K	
	0636 - 6"/36W	35 - 3500K	
	0843 - 8"/43W	40 - 4000K	
		50 - 5000K	

Specifications and Dimensions subject to change without notice.


Optional accessories are purchased separately.

*MOQ and longer lead times may apply, please contact customer service for more information.

Performance Information

Input Voltage	120-277VAC
Input Frequency	50/60Hz
Wattage	See Performance Table
Delivered Lumens	See Performance Table
System Efficacy	See Performance Table
CRI	>80
Available CCT	2700K, 3000K, 3500K, 4000K, 5000K
Projected L70	50,000 hours
Power Factor	>0.9
THD	<20%
Dimming	0-10V Dimming
Operating Temp.	-4°~113°F
IP Rating	Wet Location Rated

Mounting Type - Surface

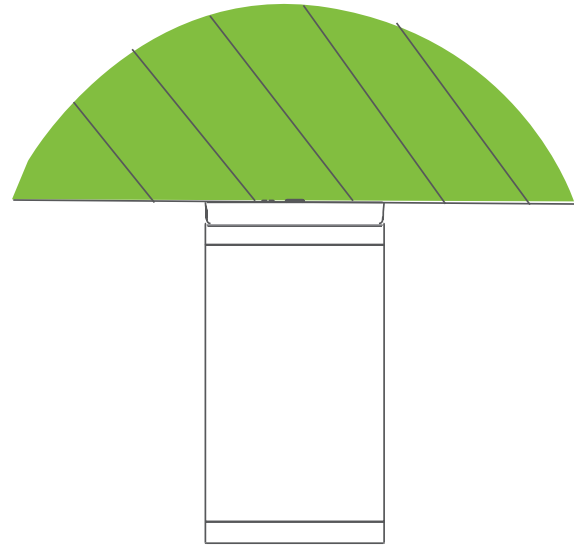

Performance Table

SKU	Size (Inch)	Wattage (W)	3000K	
			Delivered Lumens (lm)	System Efficacy (lm/W)
CCMR-0418-30-XX	4	18	1260	70
CCMR-0525-30-XX	5	25	1750	70
CCMR-0636-30-XX	6	36	2520	70
CCMR-0843-30-XX	8	43	3010	70

Product Dimensions

