



Cylinder Lighting Single Side Wall Mount Square

Architectural

DESCRIPTION

The Cylinder Lighting Single Side Wall Mount Square architectural luminaire provides a downward illumination while creating a modern design to any location. The luminaire is available in four different sizes and a wide range of color temperatures in 2700K, 3000K, 3500K, 4000K, and 5000K to accommodate any lighting requirements, ideally suited for commercial, residential, or hospitality environment.

APPLICATIONS

Residential, Hospitality, Retail, Hospital, Institutional, Office, Airport

FEATURES

Construction


Die-Cast aluminum housing with durable finish.
Aluminum extruded heat sink design.

Optical System

Tempered Glass Lens.

Warranty

5 Year Warranty.
See warranty documentation for more information.

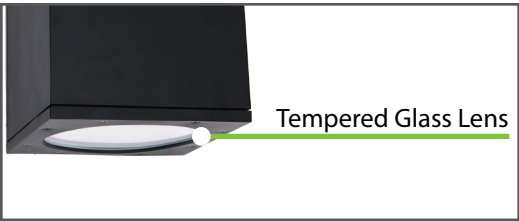

Electrical

Input voltage: 120-277VAC

Installation/ Mounting

Wall Mounted


Controls/Dimming

0-10V Dimming



Cylinder Lighting Single Side Wall Mount Square
4", 18W (1,260 lm)
5", 25W (1,750 lm)
6", 36W (2,520 lm)
8", 43W (3,010 lm)

Projected L70: 50,000 hours
System Efficacy: 70 LpW
Warranty: 5 years
0-10V Dimming



120-277VAC



0-10V Dimming



Wet Location Rated

Available Finishes
(Black is Standard Finish)



Black



*White



*Bronze



*Satin Nickel

Ordering Information

EXAMPLE: CSWS-0418-40-BK

Series	Trim Size and Wattage	CCT	Finish
CSWS	0418 - 4", 18W	27 - 2700K	BK - Black (Standard)
	0525 - 5", 25W	30 - 3000K	*WH - White
	0636 - 6", 36W	35 - 3500K	*BZ - Bronze
	0843 - 8", 43W	40 - 4000K	*SN - Satin Nickel
		50 - 5000K	

Specifications and Dimensions subject to change without notice.


*MOQ and longer lead times may apply, please contact customer service for more information.

Performance Information

Input Voltage	120-277VAC
Input Frequency	60Hz
Wattage	See Performance Table
Delivered Lumens	See Performance Table
System Efficacy	See Performance Table
CRI	>80
Available CCT	2700K, 3000K, 3500K, 4000K, 5000K
Projected L70	50,000 hours
Power Factor	>0.9
THD	<20%
Dimming	0-10V Dimming
Operating Temp.	-4°~113°F
IP Rating	Wet Location Rated

Photometric Data


* IESNA LM-63 IES Available

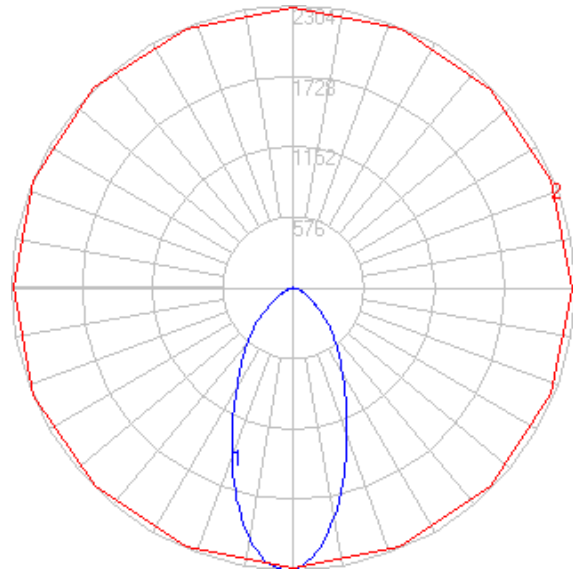


Performance Table

SKU	Trim Size (Inch)	Wattage (W)	3000K	
			Delivered Lumens (lm)	System Efficacy (lm/W)
CSWS-0418-30-XX	4	18	1260	70
CSWS-0525-30-XX	5	25	1750	70
CSWS-0636-30-XX	6	36	2520	70
CSWS-0843-30-XX	8	43	3010	70


Product Dimensions




Weight: 3.09 lbs



Weight: 3.75 lbs



Weight: 5.73 lbs



Weight: 9.48 lbs