


Date:	
Project Name:	
SKU #:	

ThinTek™ Mini R
Surface Mount Downlight

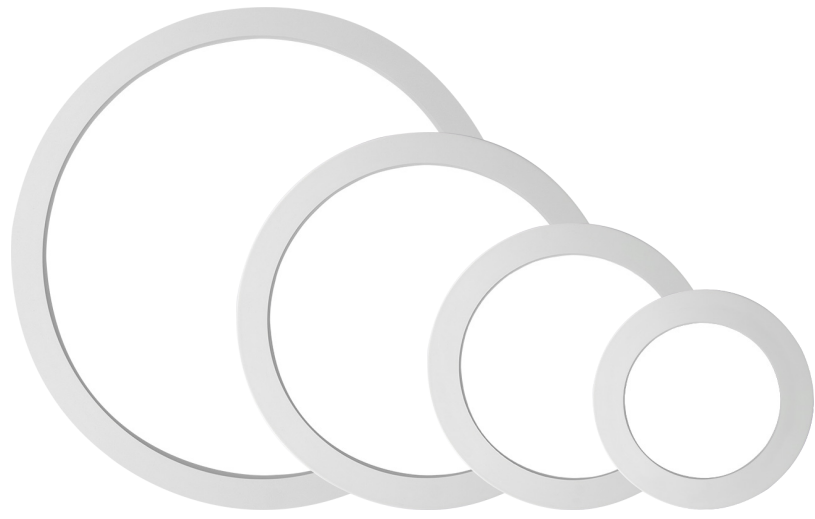

APPLICATIONS

Residential, Commercial, Multi-Family Complex

FEATURES

Construction

- Injection Molded PC Housing
- Integrated driver with short circuit protection.

Finish

- White Trim [Standard]
- Satin Nickel Trim
- Matte Black Trim
- Chrome Trim
- [Trim Options Sold Separately]

Electrical & Technical

- Input Voltage: 120V
- Input Frequency: 60Hz
- Projected L70: > 60,000 hrs
- PF: >0.9
- CRI: >80 or >90 [Option]
- THD: <20%
- CCT Selectable: 3000K/4000K/5000K
- Operating Temp.: -4 °F ~ 104 °F
- Damp Location Rated

Optical

- Edge-lit
- 110° Beam Angle

Installation/Mounting

- Surface Mounted
- Recessed Housing Mounting:
 - Torsion Clip Kit Mounting (4")
 - Friction Clip Kit Mounting (5"/6")

Controls

- Triac Dimming

Compliance

- JA8 TITLE 24 Compliant at 90CRI

Dimmer Compatibility List:

Leviton: 6672-1LW
Lutron: : MACL-153MR-WH, SCL-153P-WH, PD-6WCL-WH, CTCL-153P-WH, MSCL-OP153M-WH, DVCL-153P-WH

Lumen Output

- 5"/6W: 400lm
- 7"/12W: 1,000lm
- 9"/18W: 1,530lm
- 12"/24W: 2,160lm

Warranty

- 36,000 Hours Warranty
- See warranty documentation for more information.




ORDERING INFORMATION **EXAMPLE: 881224-R-TM-CC**

88					
Panel	Size/Wattage	Shape/Type	Series	CCT	CRI
88	0506 - 5"/ 6W 0712 - 7"/12W 0918 - 9"/18W 1224 - 12"/24W	R - Round	TM - ThinTek™ Mini	CC - 3000K/4000K/5000K	90CRI [Option]

Trim Finish Options		Mounting Options
8805-R (5" Trim)	BL (Matte Black)	88-FC (4inch Friction Clip Retrofit Kit)
8807-R (7" Trim)	SN (Satin Nickel)	88-TC-R (5"/6" Torsion Clip Retrofit Kit)
8809-R (9" Trim)	CH (Chrome)	
8812-R (12" Trim)		

[Choose Trim Size and Finish]
Example: 8805-R-BL

DIMENSIONS

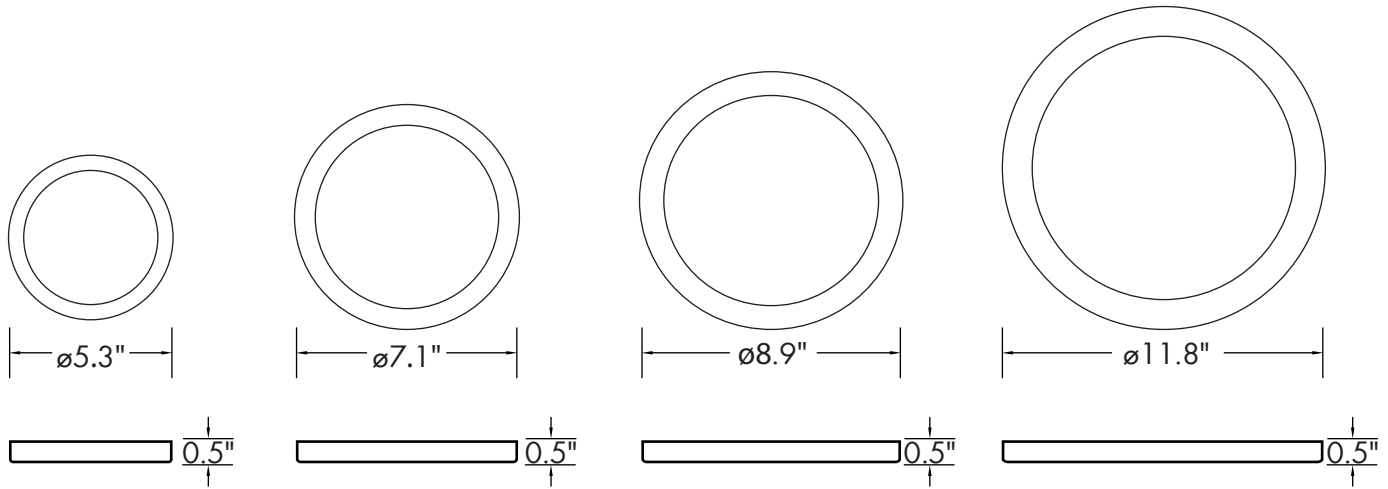

LUMEN OUTPUT

SKU	Size (in)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
880506-R-TM-CC	5	6	400	67
880712-R-TM-CC	7	12	1000	83
880918-R-TM-CC	9	18	1530	85
881224-R-TM-CC	12	24	2160	90

ACCESSORIES

