




2015 CATALOG

Thinking about lighting a little differently...



And delivering the brightest ideas in lighting since 2010.

One of the fastest growing LED companies nationwide, Truly Green Solutions has been at the forefront of the evolution in lighting, providing innovative solutions and quality products since 2010.



Originally designed and specified for luxury hotels in California, Truly Green Solutions now serves every industry with sales in all 50 states and Canada.

With over 100 products certified by Energy Star, DesignLights Consortium, and Lighting Design Lab, Truly Green Solutions products are independently tested and guaranteed for high performance and reliability.



When all eyes are on your lighting and failure is not an option, Truly Green Solutions delivers industrial grade products designed to impress and built to last.



Our innovative TrueFit™ Direct Replacement lamp and high performance Universal Light™ HID replacements embody our continuous commitment to producing the most advanced, longest-lasting LED luminaires, lamps, and components.

A PROVEN TRACK RECORD OF SUCCESS.

SCALABLE SOLUTIONS THAT MAXIMIZE ROI.

INDUSTRY LEADING PERFORMANCE.

FIVE TO SIX YEAR WARRANTY ON ALL ITEMS.

EXPERT APPLICATION ADVICE.

COMPETITIVE FINANCING & RECYCLING PROGRAMS.

CHANGING THE WORLD, ONE BULB AT A TIME.

MORE PRODUCTS AND OPTIONS AVAILABLE

www.trulygreensolutions.com



© 2015 Truly Green Solutions, Inc. All right reserved

TRUEFIT™ 15W & 18W LED TUBE



Ballast Compatible



48"
15W
1500 ~ 1875 lm
CRI: >80
120-277V
180°
50,000 hrs

48"
18W
1800 ~ 2250 lm
CRI: >80
120-277V
180°
50,000 hrs



15W Ballast Factors				15W Direct Line Wiring	
Ballast Factor	Low (78%)	Standard (88%)	High (110%)	Power Consumption	15W
Power Consumption	13W	15W	18W	Luminous Flux	1875 lm
Luminous Flux	1300 lm	1500 lm	1800 lm	Luminous Efficacy	120 lm/W
Luminous Efficacy	100 lm/W	100 lm/W	100 lm/W		

18W Ballast Factors				18W Direct Line Wiring	
Ballast Factor	Low (78%)	Standard (88%)	High (110%)	Power Consumption	18W
Power Consumption	15W	18W	21W	Luminous Flux	2250 lm
Luminous Flux	1500 lm	1800 lm	2100 lm	Luminous Efficacy	120 lm/W
Luminous Efficacy	100 lm/W	100 lm/W	100 lm/W		


Ordering #	Description	CCT
Clear 4ft 15W	834015-50-B-C TrueFit™ LED Tube 4ft 15W Day White	5000K
	834015-40-B-C TrueFit™ LED Tube 4ft 15W Natural White	4000K
	834015-35-B-C TrueFit™ LED Tube 4ft 15W Warm White	3500K
Frost 4ft 15W	834115-50-B-F TrueFit™ LED Tube 4ft 15W Day White	5000K
	834115-40-B-F TrueFit™ LED Tube 4ft 15W Natural White	4000K
	834115-35-B-F TrueFit™ LED Tube 4ft 15W Warm White	3500K
Clear 4ft 18W	834018-50-B-C TrueFit™ LED Tube 4ft 18W Day White	5000K
	834018-40-B-C TrueFit™ LED Tube 4ft 18W Natural White	4000K
	834018-35-B-C TrueFit™ LED Tube 4ft 18W Warm White	3500K
Frost 4ft 18W	834118-50-B-F TrueFit™ LED Tube 4ft 18W Day White	5000K
	834118-40-B-F TrueFit™ LED Tube 4ft 18W Natural White	4000K
	834118-35-B-F TrueFit™ LED Tube 4ft 18W Warm White	3500K

Additional colors available at trulygreensolutions.com


Easy Installation



1. Turn Off



2. Remove Fluorescent Tube



3. Install TrueFit™ Tube



4. Turn On



trulygreensolutions.com

818-206-4404



ECO & ECO HP SERIES LED TUBE



48"
18W
2,160 lm
CRI: >80
180°
50,000 hrs

ECO SERIES

48"
22W
2,640 lm
CRI: >80
180°
50,000 hrs

ECO HP SERIES

Other Lengths Available

Ordering #	Description	Cover	CCT	Voltage
834018-50-L-C	ECO SERIES LED Tube 18W 4ft Day White	Clear	5000K	100V-277V
834118-50-L-F	ECO SERIES LED Tube 18W 4ft Day White	Frosted	5000K	100V-277V
ECO 4ft 18W 834018-40-L-C	ECO SERIES LED Tube 18W 4ft Natural White	Clear	4000K	100V-277V
834118-40-L-F	ECO SERIES LED Tube 18W 4ft Natural White	Frosted	4000K	100V-277V
834018-35-L-C	ECO SERIES LED Tube 18W 4ft Warm White	Clear	3500K	100V-277V
834118-35-L-F	ECO SERIES LED Tube 18W 4ft Warm White	Frosted	3500K	100V-277V
ECO HP 4ft 22W 834022-50-L-C	ECO HP SERIES LED Tube 22W 4ft Day White	Clear	5000K	100V-277V
834122-50-L-F	ECO HP SERIES LED Tube 22W 4ft Day White	Frosted	5000K	100V-277V
834022-40-L-C	ECO HP SERIES LED Tube 22W 4ft Natural White	Clear	4000K	100V-277V
834122-40-L-F	ECO HP SERIES LED Tube 22W 4ft Natural White	Frosted	4000K	100V-277V
834022-35-L-C	ECO HP SERIES LED Tube 22W 4ft Warm White	Clear	3500K	100V-277V
834122-35-L-F	ECO HP SERIES LED Tube 22W 4ft Warm White	Frosted	3500K	100V-277V

***T5 Replacement Available** ***347-480V Available**

Popular Products

ECO 18W
4000K Frosted

Offices
Common Areas
Malls
Hotels
Hospitals
Retail Stores

ECO 18W
5000K Frosted

Warehouses
Parking Garages
Grocery Chains
Airports
Classrooms
Signs



trulygreensolutions.com

818-206-4404



LED ECO PANEL LIGHTS



50W
2x4 foot
4,750 lm

75W
2x4 foot
7,125 lm

40W
2x2 foot
3,800 lm

60W
2x2 foot
5,700 lm



40W
1x4 foot
3,800 lm

CRI: >80
100-277V
*347V/480V (Option)
Dimmable (120V)
50,000 hrs
3000K, 3500K, 4000K, 5000K

Mounting Options



trulygreensolutions.com

: 818-206-4404



ILLUSION™ A19



**Designed & Built
for Hospitality**

**8.5W
800 lm
CRI: >80
330°
50,000 hrs
Dimmable**

**Best-in-Class Dimming
& Beam Angle**

Ordering #	Description	CCT	Voltage
113401	LED OMNI A19 8.5W Day White	5000K	120V
113402	LED OMNI A19 8.5W Natural White	4000K	120V
113403	LED OMNI A19 8.5W Warm White ES	3000K	120V
113404	LED OMNI A19 8.5W Warm White ES	2700K	120V

Replaces



60W Incandescent Bulb



20W CFL Bulb



trulygreensolutions.com

818-206-4404



LM 79

LM 80



LED Downlights



LED Eco Downlight (Dimmable)

10W 5"-6"
830 lm



LED Omnidirectional Downlight (Dimmable)

10W 5"-6"
880 lm

CRI: >80
120V
50,000 hrs
(277V Non-Dim)

LED Surface Mounted Downlight (Dimmable)

10W 5"-6"
790 lm

*Mounts to J-Box

Replaces

Downlight
Fixture

Incandescent

CFL

Halogen BR

Halogen PAR



: trulygreensolutions.com

: 818-206-4404



LED WALL PACK



90W / 8,730 lm

60W / 5,820 lm

40W / 3,880 lm

CRI: \geq 70
120-277V
100,000 hrs

Ordering #	Description	CCT	Voltage
331140-50	LED Wall Pack 40W Day White	5500K	120V-277V
331160-50	LED Wall Pack 60W Day White	5500K	120V-277V
331190-50	LED Wall Pack 90W Day White	5500K	120V-277V

Hood Option



Replaces: 75W-400W



trulygreensolutions.com

818-206-4404



LED UNIVERSAL LIGHTS G4™ - 360°



54W
7,830 lm
CRI: ≥ 85
360°
60,000 hrs



45W / 6,525 lm



36W / 5,220 lm



27W / 3,915 lm

Ordering #	Description	CCT	Voltage
27W	310811- G4 LED Universal Light G4 27W Day White	5000K	100V-277V
	310812- G4 LED Universal Light G4 27W Natural White	4000K	100V-277V
	310813- G4 LED Universal Light G4 27W Warm White	3000K	100V-277V
36W	310821- G4 LED Universal Light G4 36W Day White	5000K	100V-277V
	310822- G4 LED Universal Light G4 36W Natural White	4000K	100V-277V
	310823- G4 LED Universal Light G4 36W Warm White	3000K	100V-277V
45W	310831- G4 LED Universal Light G4 45W Day White	5000K	100V-277V
	310832- G4 LED Universal Light G4 45W Natural White	4000K	100V-277V
	310833- G4 LED Universal Light G4 45W Warm White	3000K	100V-277V
54W	310841- G4 LED Universal Light G4 54W Day White	5000K	100V-277V
	310842- G4 LED Universal Light G4 54W Natural White	4000K	100V-277V
	310843- G4 LED Universal Light G4 54W Warm White	3000K	100V-277V

***347-480V Available**

Features



360° Beam Angle



Flame Resistant Material



**Samsung SMD 5630
140 LpW**



**IP64
Water Resistant**



Internal Surge Protection



trulygreensolutions.com

818-206-4404



LED UNIVERSAL LIGHTS - 360°



24W
2,400 lm
CRI: ≥ 80
360°
50,000 hrs



20W / 2,100 lm



16W / 1,650 lm



12W / 1,150 lm

Ordering #	Description	CCT	Voltage
12W	310771 LED Universal Light 12W Day White	5000K	100V-277V
	310772 LED Universal Light 12W Natural White	4000K	100V-277V
	310773 LED Universal Light 12W Warm White	3000K	100V-277V
16W	310781 LED Universal Light 16W Day White	5000K	100V-277V
	310782 LED Universal Light 16W Natural White	4000K	100V-277V
	310783 LED Universal Light 16W Warm White	3000K	100V-277V
20W	310791 LED Universal Light 20W Day White	5000K	100V-277V
	310792 LED Universal Light 20W Natural White	4000K	100V-277V
	310793 LED Universal Light 20W Warm White	3000K	100V-277V
24W	310801 LED Universal Light 24W Day White	5000K	100V-277V
	310802 LED Universal Light 24W Natural White	4000K	100V-277V
	310803 LED Universal Light 24W Warm White	3000K	100V-277V

*347-480V Available

Features



360° Beam Angle



Flame Resistant Material



-30°~+60°
Operating Temperature



IP64
Water Resistant



Internal Surge Protection



trulygreensolutions.com

818-206-4404



LED UNIVERSAL LIGHTS - 360°



54W
6,480 lm
CRI: >85
360°
50,000 hrs

45W / 5,400 lm

36W / 4,320 lm

27W / 3,200 lm

Ordering #	Description	CCT	Voltage
27W	310811 LED Universal Light 27W Day White	5000K	100V-277V
	310812 LED Universal Light 27W Natural White	4000K	100V-277V
	310813 LED Universal Light 27W Warm White	3000K	100V-277V
36W	310821 LED Universal Light 36W Day White	5000K	100V-277V
	310822 LED Universal Light 36W Natural White	4000K	100V-277V
	310823 LED Universal Light 36W Warm White	3000K	100V-277V
45W	310831 LED Universal Light 45W Day White	5000K	100V-277V
	310832 LED Universal Light 45W Natural White	4000K	100V-277V
	310833 LED Universal Light 45W Warm White	3000K	100V-277V
54W	310841 LED Universal Light 54W Day White	5000K	100V-277V
	310842 LED Universal Light 54W Natural White	4000K	100V-277V
	310843 LED Universal Light 54W Warm White	3000K	100V-277V

*347-480V Available

Features



360° Beam Angle



Flame Resistant Material



**Samsung SMD 5630
120 LpW**



**IP64
Water Resistant**



Internal Surge Protection



LED UNIVERSAL LIGHTS - 360°



125W
15,125 lm
CRI: ≥ 85
360°
50,000 hrs

100W / 12,100 lm

80W / 9,680 lm

60W / 7,260 lm

	Ordering #	Description	CCT	Voltage
60W	310851	LED Universal Light 60W Day White	5000K	100V-277V
	310852	LED Universal Light 60W Natural White	4000K	100V-277V
	310853	LED Universal Light 60W Warm White	3000K	100V-277V
80W	310861	LED Universal Light 80W Day White	5000K	100V-277V
	310862	LED Universal Light 80W Natural White	4000K	100V-277V
	310863	LED Universal Light 80W Warm White	3000K	100V-277V
100W	310871	LED Universal Light 100W Day White	5000K	100V-277V
	310872	LED Universal Light 100W Natural White	4000K	100V-277V
	310873	LED Universal Light 100W Warm White	3000K	100V-277V
125W	310881	LED Universal Light 125W Day White	5000K	100V-277V
	310882	LED Universal Light 125W Natural White	4000K	100V-277V
	310883	LED Universal Light 125W Warm White	3000K	100V-277V

***347-480V Available**

Features



360° Beam Angle



Flame Resistant Material



**Samsung SMD 5630
120 LpW**



**IP64
Water Resistant**



**MEANWELL
Driver (External)**



LED UNIVERSAL LIGHTS G4™ - 180°



40W
5,800 lm
CRI: ≥ 85
180°
60,000 hrs



30W / 4,350 lm



20W / 2900 lm

Ordering #	Description	CCT	Voltage
320811-G4	LED Universal Street Light G4 20W Day White	5000K	100V-277V
20W 320812-G4	LED Universal Street Light G4 20W Natural White	4000K	100V-277V
320813-G4	LED Universal Street Light G4 20W Warm White	3000K	100V-277V
320821-G4	LED Universal Street Light G4 30W Day White	5000K	100V-277V
30W 320822-G4	LED Universal Street Light G4 30W Natural White	4000K	100V-277V
320823-G4	LED Universal Street Light G4 30W Warm White	3000K	100V-277V
320841-G4	LED Universal Street Light G4 40W Day White	5000K	100V-277V
40W 320842-G4	LED Universal Street Light G4 40W Natural White	4000K	100V-277V
320843-G4	LED Universal Street Light G4 40W Warm White	3000K	100V-277V

***347-480V Available**

Features



180° Beam Angle



Flame Resistant Material



360° Twistable



**Samsung SMD 5630
140 LpW**



Internal Surge Protection



trulygreensolutions.com

: 818-206-4404



FLEXOPTIX™ HIGH BAY



450W
43,296 lm
CRI: >70
100-277V
150,000 hrs



300W / 28,864 lm



200W / 19,243 lm



150W / 14,432 lm

*347V-480V Available

Beam Options

- 50W Modular Light Engine
- CREE XT-E LED's
- Multiple Beam Angle Lens Cover Options
- Advanced Thermal Management
- IP65 (IP67 Optional)



85/135°



120°



45°



30°



trulygreensolutions.com

818-206-4404



FLEXOPTIX™ SHOEBOX



300W
28,493 lm
CRI: >70
100-277V
150,000 hrs

200W / 19,002 lm

150W / 14,292 lm

100W / 9,734 lm

- 50W Modular Light Engine
- CREE XT-E LED's
- Multiple Beam Angle Lens Cover Options
- Advanced Thermal Management
- IP65 (IP67 Optional)



*347V-480V Available

Beam Options

85/135°



120°



trulygreensolutions.com

818-206-4404



FLEXOPTIX™ FLOOD



450W
43,296 lm
CRI: >70
100-277V
150,000 hrs

300W / 28,864 lm

200W / 19,232 lm

150W / 14,432 lm

100W / 9,644 lm

50W / 4,811 lm



- 50W Modular Light Engine
- CREE XT-E LED's
- Multiple Beam Angle Lens Cover Options
- Advanced Thermal Management
- IP65 (IP67 Optional)



***347V-480V Available**

Beam Options

85/135°

45°

30°



trulygreensolutions.com

818-206-4404



FEATHERLITE™ HIGH BAY



120W / 15,600 lm

180W
23,500 lm
130 lm/W
CRI: >70
100-277V
50,000 hrs




150W
19,500 lm
130 lm/W
CRI: >70
100-277V
50,000 hrs

- MeanWell Power Supply
- High Efficiency Nichia LED's
- Rugged Die-cast Aluminum
- 3.96 lbs (Without Driver)
7.93 lbs (With Driver)
- Beam: 60°, 90°, 120°



*347V-480V Available

Mounting Options



trulygreensolutions.com

: 818-206-4404



LED ECO SERIES HIGH BAY



180W
 20,700 lm
 115 lm/W (IP65)
 22,500 lm
 125 lm/W (IP30)
 CRI: >70
 100-277V
 50,000 hrs

Mounting Options



150W / 17,250 lm

120W / 13,800 lm



100W / 11,500 lm



- IP30 / IP65 (Optional)
- High Efficiency Nichia LED's
- Integrated Replaceable Driver
- Compact Design with Advanced Thermal Management
- Beam: 90°, 120°



*347V-480V Available



trulygreensolutions.com

818-206-4404



LED HIGH MAST



900W / 103,500 lm



450W / 42,750 lm



300W / 34,500 lm

95-115 lm/W
100-277V
 * 347V-480V Available
50,000 hrs
30° & 60°x90°




600W / 69,000 lm



240W / 22,800 lm

Mounting Diagram

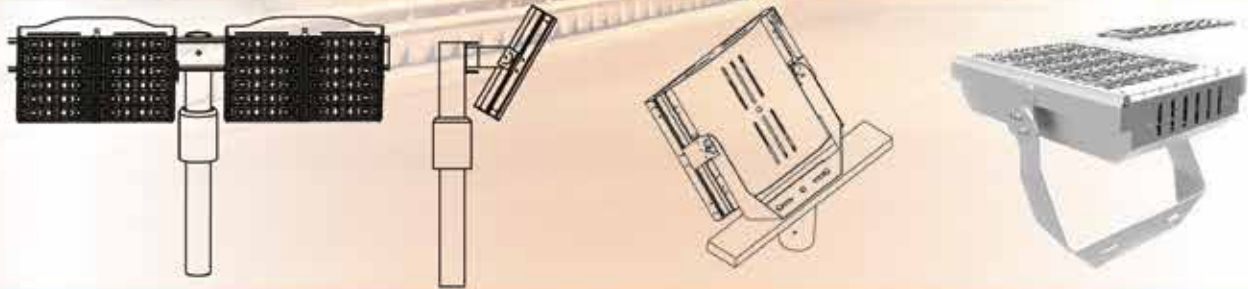

trulygreensolutions.com

: 818-206-4404



LED LINEAR HIGH BAY



Nichia LED
120 lm/W
CRI: ≥ 70
100-277V
 *347V-480V Available
50,000 hrs
Beam: 40°x80°

240W / 28,800 lm

150W / 18,000 lm



210W / 25,200 lm

120W / 14,400 lm

180W / 21,600 lm

90W / 10,800 lm

Mount Options

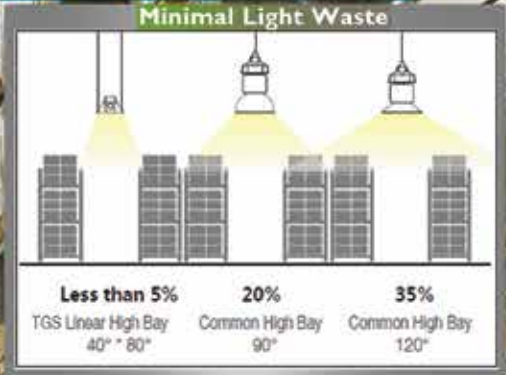

trulygreensolutions.com

818-206-4404



LED HIGH BAY



200W
18,800 lm
CRI: >80
100-277V
45° / 90° / 120°
100,000 hrs

150W / 14,850 lm

100W / 10,500 lm

Lamp Base

CREE
LED



6063
ALUMINUM



*347V-480V Available

Reflectors

120°



90°



45°



45°



ACRYLIC



: trulygreensolutions.com
: 818-206-4404

LED Emergency Battery Backup



LED Low Voltage Emergency Backup LED Products With External Driver

100-277V
≥ 90 min RunTime
24 Hour Recharge

8W / 12W / 25W



LED High Voltage Emergency Backup LED Products With Internal Driver

170V DC (Equivalent 120 VAC)
≥ 90 min RunTime
24 Hour Recharge

18W / 25W



trulygreensolutions.com

818-206-4404





Truly Green Solutions, Inc
9601 Owensmouth Avenue, Suite 2
Chatsworth, CA 91311
P: 818-206-4404
F: 866-577-5302
E: info@trulygreensolutions.com
www.trulygreensolutions.com

© 2015 Truly Green Solutions, Inc. All rights reserved.