WPS LC

Installation Instructions

WARNING

PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION

— To prevent personal injury or product damage, only licensed electricians should install product.
— To avoid electric shock or component damage, disconnect power before attempting installation or servicing.
— This product must be installed in accordance with the national electric code (NEC) and all applicable federal, state and local electric codes and safety standards.
— Disconnect product and allow cooling prior to servicing.
— Any alteration or modification of this product is expressly forbidden as it may cause serious personal injury, death, property damage and/or product malfunction.
— To prevent product malfunction and/or electrical shock this product must be properly grounded.
— This luminaire is designed to operate in ambient temperatures ranging from -40°F to 113°F and to be horizontally mounted with the LEDs facing down.
— Wall mount only.

Installation

1

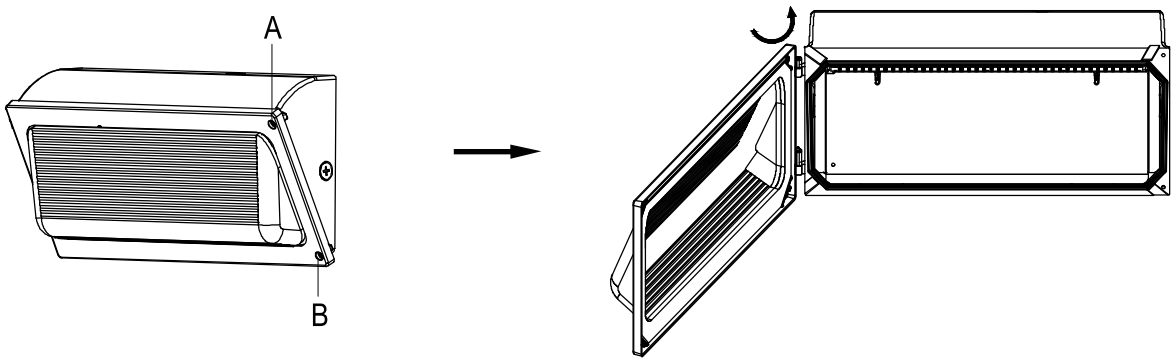

Loosen the 2x M5 crews (A/B) and open the fixture.

2

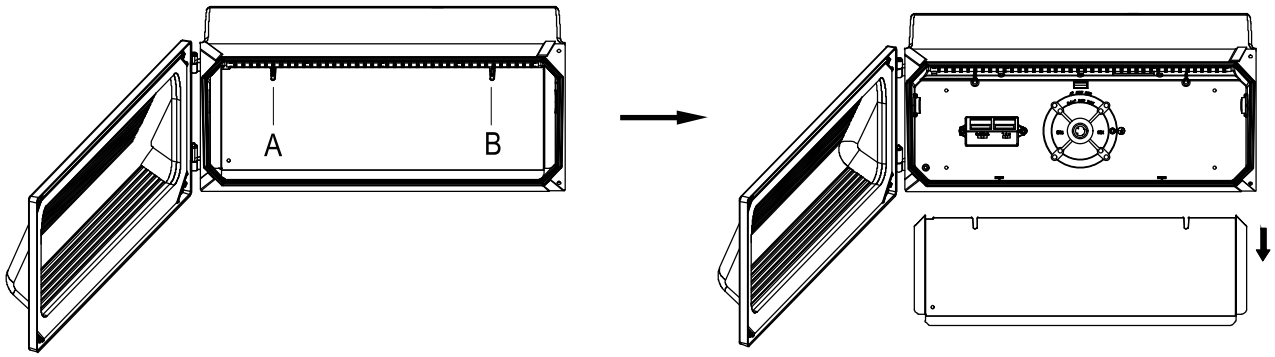

Loosen the 2 screws (A/B) and remove the reflector.

3

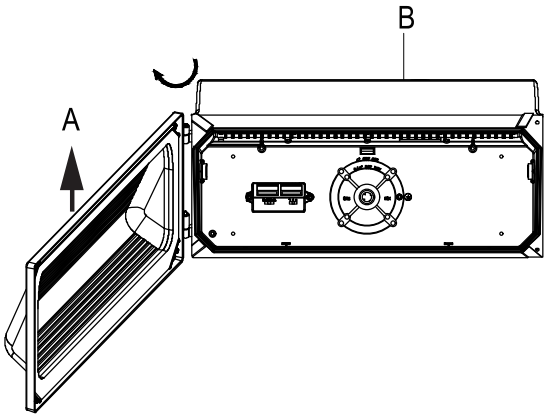

Separate part A and B and set part A aside.

4

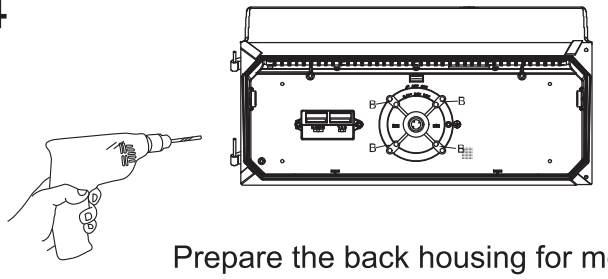

Prepare the back housing for mounting by drilling or knocking out the appropriate hole.

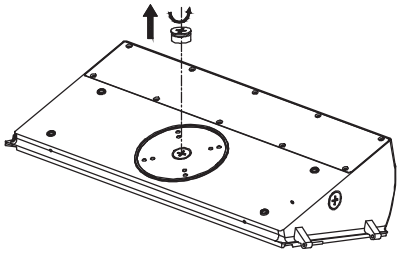

Unscrew the 1/2 screw if needed.
(Don't Remove the Gasket)

5

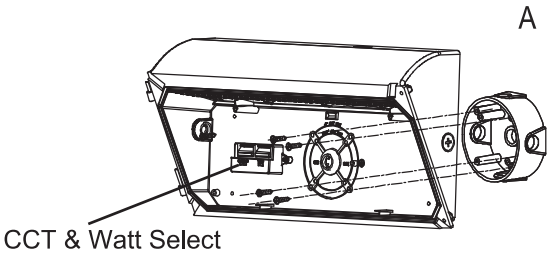

5.1 Fix the back housing to the junction box
5.2 Connect wires as per the wiring diagram (P3)
5.3 Select desired color temperature and wattage

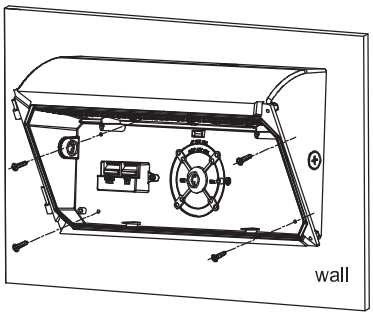

5.1 Fix the back housing on the wall
5.2 Connect wires as per the wiring diagram (P3)
5.3 Select desired color temperature and wattage

6

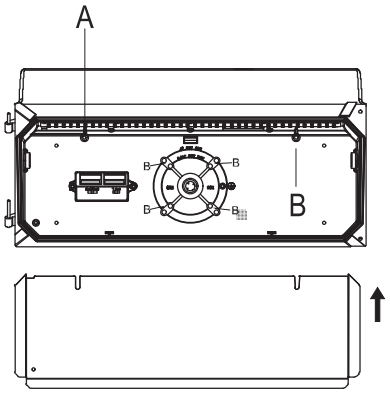

Put back the reflector and tighten the 2 screws (A/B)

7

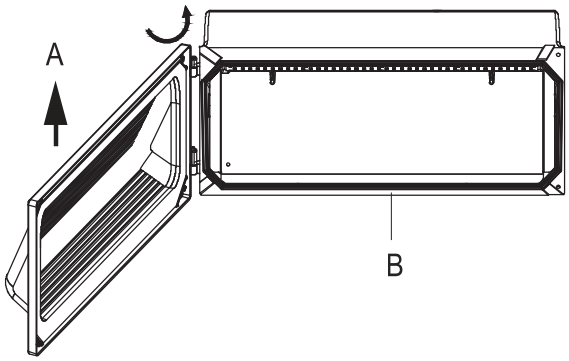

Put part A back onto the hinge of part B.
Check the hinge for secure.

8

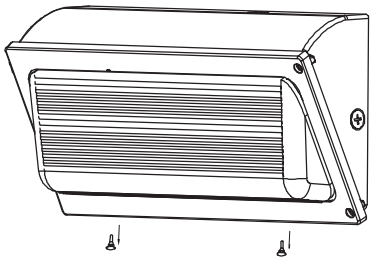

Remove the waterproof plugs.

Connect to the main electricity and check if the unit works properly.
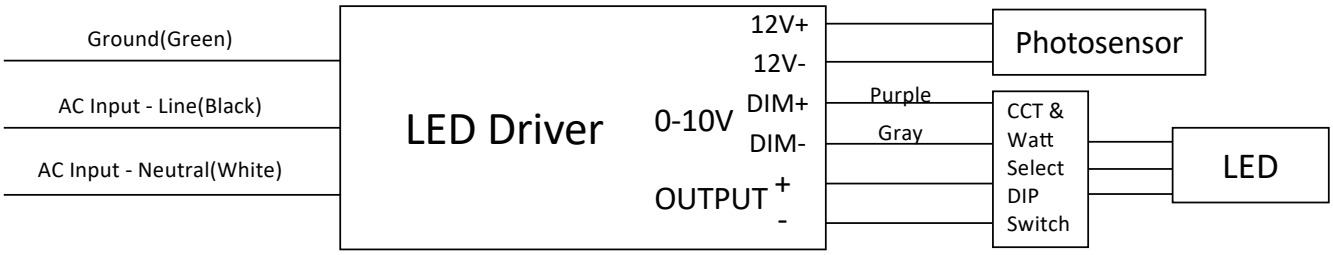
Wiring Diagram