🖄 WARNING

PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION

- To prevent personal injury or product damage only licensed electricians should install.
- To avoid electric shock or component damage disconnect main power source before attempting installation or servicing.
- This product must be installed in accordance with the national electric code (NEC) and all applicable federal, state and local electric codes and safety standards.
- Disconnect product and allow cooling prior to servicing.
- Any alteration or modification of this product is expressly forbidden as it may cause serious personal injury, death, property damage and/or product malfunction.
- To prevent product malfunction and/or electrical shock this product must be properly grounded.
- Suitable for damp location.

PREPARATION

- 1. Shut off power at the fuse box or circuit breaker box and remove the existing fixture including mounting hardware.
- 2. Carefully unpack the new fixture and layout all the parts in a clean location. Take care not to misplace any small parts necessary for installation.

INSTALLATION INSTRUCTIONS

3. An octagonal junction box must be installed at each desired location, before installing the luminaire. The box must have a depth of at least $\frac{1}{2}$ ".

- 4. Twist counterclockwise to loosen canopy screws (Fig. 1).
- 5. Remove mounting bracket from luminaire. Do not remove any other parts (Fig. 1).
- 6. Adjust mounting bracket so the arms are facing away from junction box. Pull power supply wires from junction box through the center opening of mounting bracket (Fig. 2).
- 7. Attach mounting bracket to junction box, make sure mounting bracket is flushed and leveled before tightening with mounting screws (Fig. 2).
- 8. Make electrical wiring connections between luminaire and power supply (see ELECTRICAL WIRING below).
- 9. Position luminaire over junction box, pass canopy over arms from mounting bracket.
- 10. Secure canopy and mounting bracket with canopy screws.

11. Select desired LED color temperature by using the switch of luminaire situated on canopy.

ELECTRICAL WIRING (FIG.3)

12. Strip 3/8" of bare power supply wires from junction box.

13. Follow the wires connection guide to connect wires from luminaire to power supply wires from junction box, using the wire nuts.


14. Connect neutral wire (white) from junction box to neutral wire (white) from luminaire.

15. Connect hot wire (black) from junction box to live wires (black) from luminaire.

16. Connect green ground wire from luminaire to bare copper ground wire from junction box, using a wire nut.

17. Once the connections are done, push wires back inside junction box.

Your installation is now complete. Return powr and test the fixture.

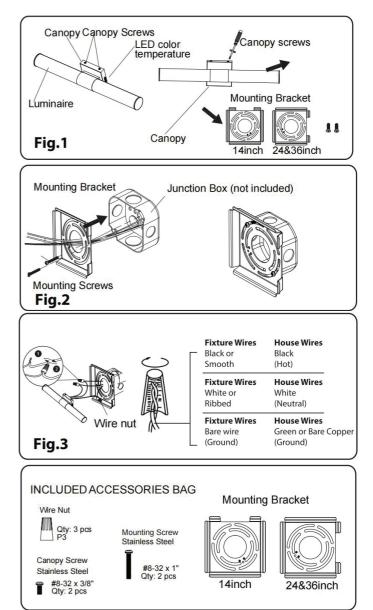

CARE AND MAINTENANCE

Use a clean, soft cloth to wipe the surface of the fixture. DO NOT use any cleaners with chemicals, solvents or harsh abrasives.

Dimming: Dimmable with ELV and/or LED compatible wall dimmer switches.