INDOOR

tgs

Date:	
Project Name:	
Sku #:	

Double Ring Round Fixture

Flush Mounted Ceiling Light

Power Selectable

5CCT Field Selectable

APPLICATIONS

Residential, Commercial, Multi-Family

FEATURES

Construction

– Die-formed Cold-Rolled Steel
– Powder Coated Paint

Finish

- Brushed Nickel
- Black*
- White*
- Oil Rubbed Bronze*

Electrical & Technical

- Input Voltage: 120V
- Input Frequency: 60Hz
- Projected Life: L70 > 50,000 hrs
- PF: >0.9
- CRI: >80 or >90 [Option]
- THD: <20%
- Adjustable Lumen Output
- CCT Selectable: 2700K/3000K/3500K/ 4000K/5000K
- Operating Temp.: -4°F~104°F
- Damp Location Rated

Optical

- High Transmission Acrylic Lens

Installation/Mounting

- FLush Mount:
  - 4" Square J- Box
  - 4" Octagon J-Box

Controls

- Triac Dimming

Compliance

- JA8 TITLE 24 Compliant at 90CRI

Dimmer Compatibility List:

Leviton: IPL06-107, 6672-1LM, 6674-P0W, DLS06-1LZ
Lutron: TGCL-153P, MACL-153M, CTCL-153P, PD-6WCL

Lumen Output

- ø14":
  25W: 1,900lm
- ø16":
  30W: 1,900lm

Warranty

- 5 Year Warranty
See warranty documentation for more information.

80+ CRI · Damp Location · Intertek · ENERGY STAR · JA8 TITLE 24 COMPLIANT

ORDERING INFORMATION

EXAMPLE: DRRC-14WS-CC-SN

DRRC				
Series	**Size/Wattage**	**CCT**	**Finish**	**CRI**
DRRC	14WS - 14":14W/18W/25W 16WS - 16":18W/25W/30W	CC - 2700K/3000K/3500K/4000K/5000K	BN - Brushed Nickel BK - Black* WH - White* OB - Oil Rubbed Bronze*	90CRI [Option]

9601 Variel Ave, Chatsworth, CA 91311
(818) - 206 - 4404

Specifications & dimensions subject to change without notice.
*MOQ & longer lead times may apply, please contact customer service for more information.

Double Ring Round Fixture

Flush Mount Ceiling Light

DIMENSIONS

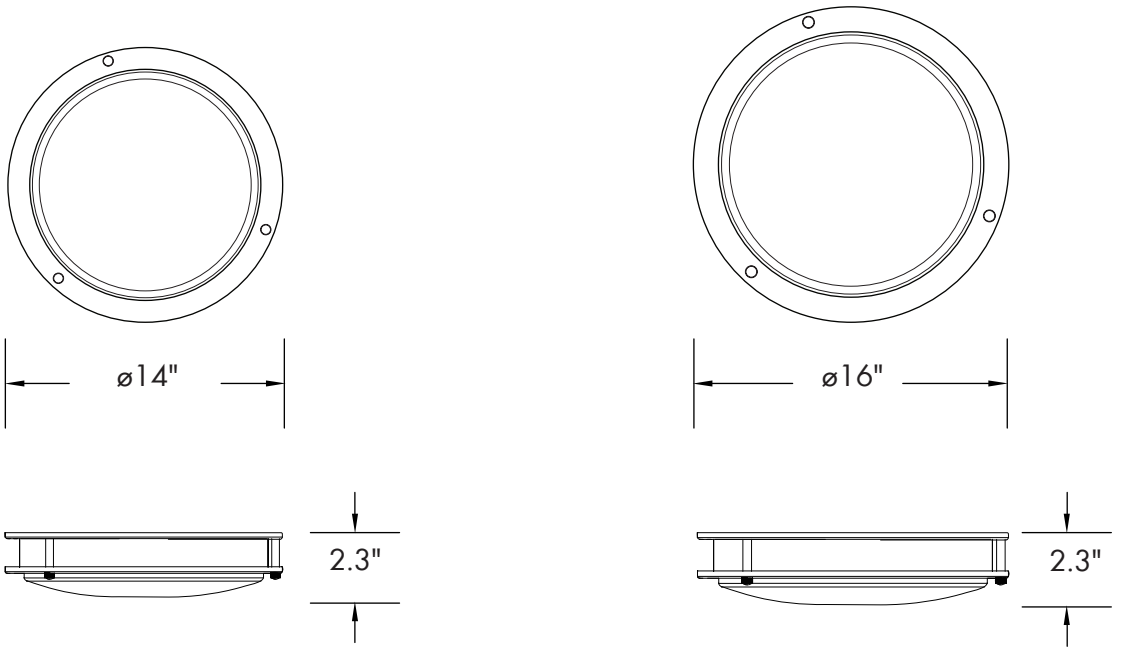

LUMEN OUTPUT

SKU	Size (in)	Wattage (W)	Delivered Lumens (lm)	Efficacy (lm/W)
DRRC-14WS-CC-XX	ø14	14W/18W/25W	1900 (25W)	76
DRRC-16WS-CC-XX	ø16	18W/25W/30W	1900 (30W)	63

9601 Variel Ave, Chatsworth, CA 91311
(818) - 206 - 4404
Specifications & dimensions subject to change without notice.
*MOQ & longer lead times may apply, please contact customer service for more information.